
31-8.3V-BKA.1Floor Mounted Tub Group with Hand Shower Requires Concealed Rough SS-FL8.3 Hand Shower Flow Rate: 2.0 GPM



Meets the applicable requirements of ASME A112.18.1-2005/CSA B125.1-05, entitled "Plumbing Supply Fittings"

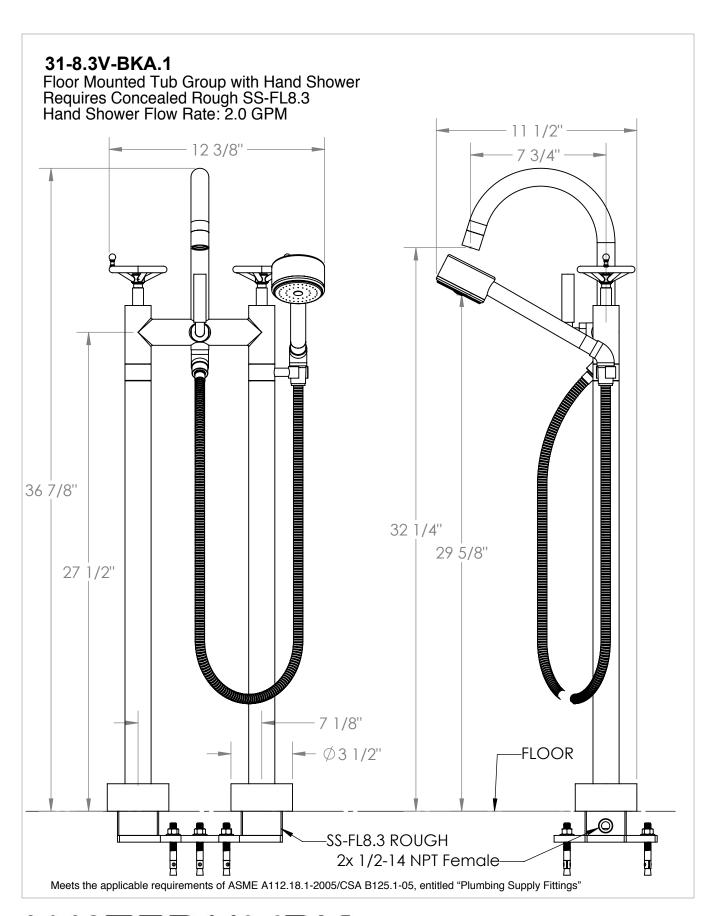

WATERMYRK DESIGNS 8/16/2019