

### Cooker hob KF Marine 7666 962

Cooker hobs

Code: 7666 962




### DETAILS


Supply	220-240 V; 50.60 Hz
Edge/Installation Type	Standard (8 mm Edge)
Dimensions	760x500 mm
Base size	76cm
Heating element	Five burners
Built-in hole	560x480 mm
Grids	Cast iron grids and enamelled burner covers
Material/Finish	Foster-brushed finish AISI 316 stainless steel
Total power	10.700 W

Auxiliary	1.000 W
Semirapid	2x1.750 W
Rapid	2.700 W
Triple crown	3.500 W
Safety	Safety valve with quick-acting thermocouple
Ignition	Electric ignition under knob
Gas type	Tested for installation with natural gas, LPG nozzle set included.
Туре	Gas Hob
FEATURES	
Cast iron grids	Cast-iron is the ideal material for an hob grid, this due to the manifold properties characterising it: high heat capacity that improves cooking performance; high weight and stability that improve safety; sturdiness that preserves the hob's original aspect over time; easy cleaning.
Marine stainless steel	The Marine collection of sinks and hobs uses AISI 316 stainless steel, a superior quality material and widely used in the marine industry, which guarantees the best resistance to the corrosive effects of acids contained in food, salt and detergents.
Safe cooking	All Foster cooker hobs are equipped with safety valves. They shut off the gas supply very quickly if the flame accidentally goes out.
Special burners	Many Foster hobs are equipped with special burners, with two or three rings of fire that greatly increase the power delivered and the heated surface. In the DUAL models the two fire crowns also have independent ignition, making these burners perfect for both intensive and delicate cooking.

Ultra-flat hob	Design meets functionality in the the ultra-flat models. Elegant grids that form a generously sized overall surface.
Under-knob ignition	The utmost freedom of movement with electronic under-knob ignition, a common feature of all models that allows a one-hand ignition of the burner.
Narrow cut-out	These 5 burners products for standard built-in installation require a cut-out of only 56 cm, i.e. less than their nominal width. This makes them an interesting alternative for 60 cm models, which usually require the same cut-out.

### **TECHNICAL DATA**

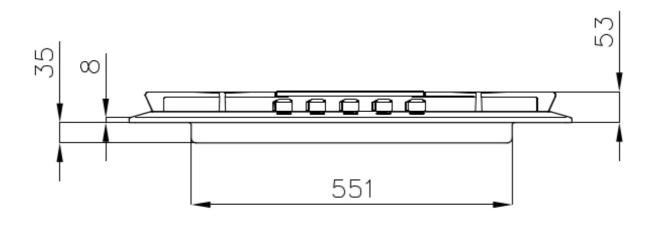

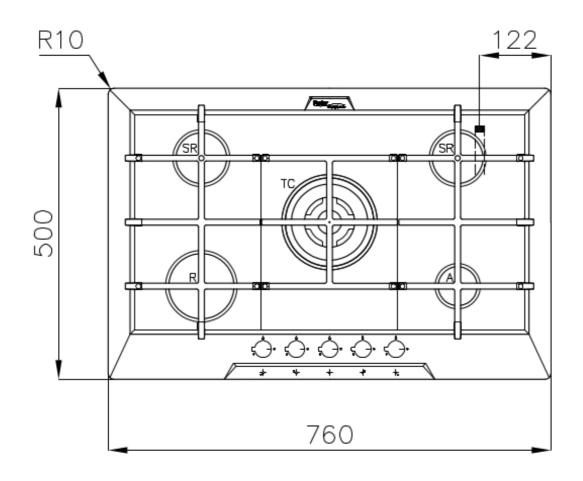

#### **RECOMMENDED PAIRINGS**





Hood KS Lux 2504 094

Sink FM - 1972 06x