


**27-8.3-CL15**

Floor Mounted Tub Group with Hand Shower

Note: Some building codes may require a remote pressure balance valve for anti-scald, such as the SS-PB50.

Hand Shower Flow Rate: 1.75 GPM

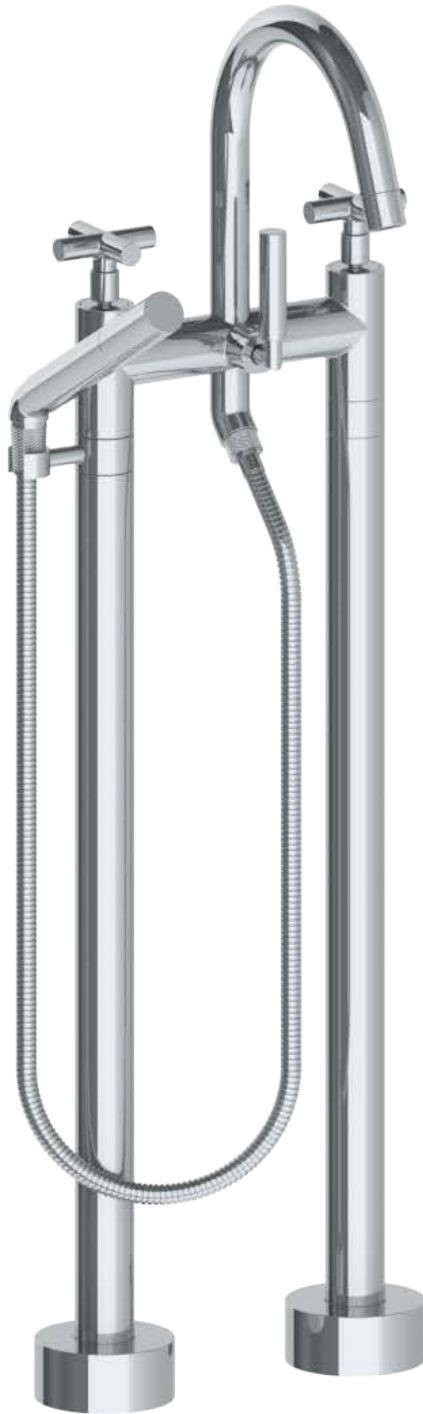

Meets the applicable requirements of ASME A112.18.1-2005/CSA B125.1-05, entitled "Plumbing Supply Fittings"

**WATERMARK** DESIGNS 12/16/2014

350 Dewitt Ave Brooklyn NY 11207 USA T 718 257 2800 F 718 257 2144 [info@watermark-designs.com](mailto:info@watermark-designs.com)

