

Underscore[®] Rectangle

5.5' BubbleMassage[™] Whirlpool Bath K-1173-XH2G

Features

- 122 airjets release thousands of bubbles that surround, support, and massage the body.
- Variable-speed blower lets you adjust airjet massage intensity to 18 levels.
- Zones of Control[™] feature allows you to target massage to back, midsection, or feet.
- 8 hydromassage jets can be individually adjusted for water flow and direction.
- Variable-speed pump for adjusting hydromassage intensity.
- Built-in heater.
- Lighted keypads.
- Sloping backrest provides comfort.
- Slotted overflow allows for deep soaking.
- Immediate and manual purge cycles remove residual water from air channels after use.
- End drain.

Material

Acrylic.

Hydrotherapy

- BubbleMassage.
- Whirlpool.

Installation

- Requires K-7271 or K-7272 Clearflo slotted overflow bath drain and K-9698 jet trim kit (sold separately).
- Drop-in or undermount.
- Requires 240V hard-wire electrical service.
- Under-mount installation requires kit K-591 (sold separately).

Required Products/Accessories

K-7271 Brass Slotted Overflow Bath Drain or

K-7272 PVC Slotted Overflow Bath Drain

K-9698 Flexjet® Whirlpool Trim Kit

Recommended Products/Accessories

K-1601 Bath/Whirlpool Footstop K-9497 2-1/2" Keypad Trim K-9498 3" Keypad Trim K-24916 Wireless Music Kit K-591 Under-Mount Installation Kit K-1491 Bath/Whirlpool Pillow 1184460 Undermount installation kit K-1177 Vinyl Tiling-in Bead K-23726 Drain treatment K-23732 Tub & shower cleaner



Codes/Standards

ASME A112.19.7/CSA B45.10 CSA B45.5/IAPMO Z124 ASTM E162 ASTM E662 UL 1795 CSA C22.2 No. 218.2

KOHLER® Plastic Baths and Receptors Lifetime Limited Warranty KOHLER® Hydrotherapy Components Five-Year Limited Warranty See website for detailed warranty information.

See website for detailed warranty informatio

Available Colors/Finishes

Color tiles intended for reference only.


Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
	G9	Sandbar
	33	Mexican Sand™
	K4	Cashmere





Underscore[®] Rectangle

5.5' BubbleMassage™ Whirlpool Bath K-1173-XH2G

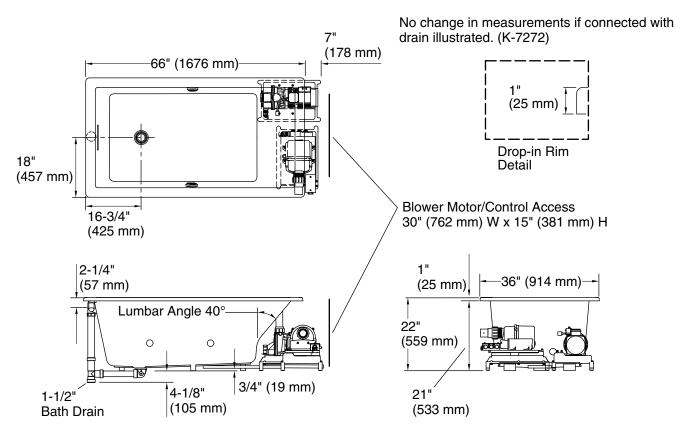

Required Electrical Service

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD). Blower, Pump, 220-240 V, 20 A, 50/60 Hz Heater:

Technical Information

All product dimensions are nominal.

Installation:	Drop-in, Under-mount
Drain location:	Reversible
Basin area, bottom:	44-1/2" x 26-1/2" (1130 mm x 673 mm)
Basin area, top:	60-1/4" x 30-1/4" (1530 mm x 768 mm)
Weight:	187 lbs (84.8 kg)
Minimum floor load:	62.5 lbs/ft² (305.2 kg/m²)
Water depth:	17-3/4" (450 mm)
Water capacity:	102 gal (386.1 L)
Cutout:	Drop-in, 65-1/2" x 35-1/2" (1664 mm x
	902 mm)
Electrical component	Blower: 220-240 V, 5 A, 50/60 Hz
rating:	Pump: 220-240 V, 11 A, 50/60 Hz
	Heater: 220-240 V, 50/60 Hz, 1500 W

Notes

Measure your actual product for rough-in details. Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

IMPORTANT! Dry fit the drain assembly prior to installing the bath. The bath cannot be installed with all drain components attached.

Kit is required for under-mount installations (sold separately).

The pump base extends 7" (178 mm) beyond the edge of the rim. Modify the framing as needed.

