# **KOHLER**<sub>®</sub>

# Features

- Bask<sup>®</sup> heated surface creates spa-like relaxation with soothing warmth on your back, shoulders, and neck.
- Three heat settings allow you to customize the surface temperature.
- Molded lumbar support and armrests offer extra comfort while bathing.
- Coordinates with other products in the Bancroft collection.

#### Material

• Acrylic.

# Installation

- Reversible drain.
- Drop-in.

#### **Recommended Products/Accessories**

K-1491 Bath/Whirlpool Pillow K-1601 Bath/Whirlpool Footstop K-7161-AF 1-1/2" adjustable pop-up drain above- or through-floor K-7265 Brass toe tap bath drain K-24916 Wireless Music Kit K-37382 45" Rough-in Cable Bath Drain K-23726 Drain treatment K-23732 Tub & shower cleaner



# **Codes/Standards**

CSA B45.5/IAPMO Z124 ASTM E162 ASTM E662 UL 1795

#### KOHLER<sup>®</sup> Plastic Baths and Receptors Lifetime Limited Warranty

See website for detailed warranty information.


# **Available Colors/Finishes**

Color tiles intended for reference only.





# Bancroft® 5.5' Bath K-1156-W1

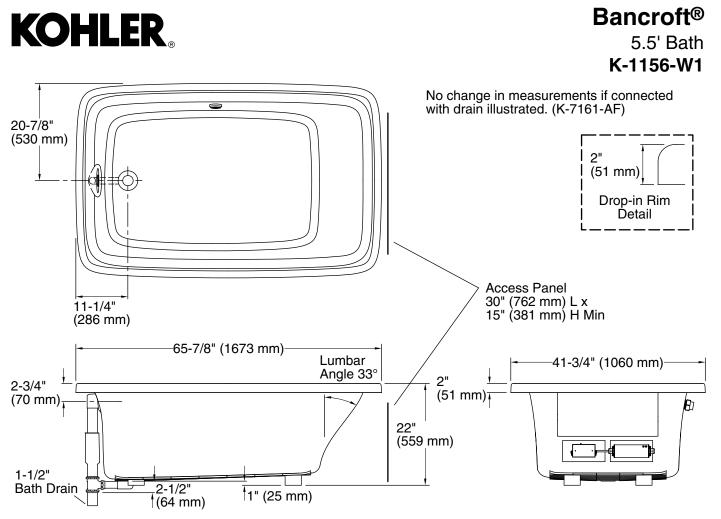

# **Required Electrical Service**

One circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD). Heated Surface: 120 V, 15 A, 60 Hz

#### **Technical Information**

All product dimensions are nominal.

•	
Installation:	Drop-in
Drain location:	End
Basin area, bottom:	46" x 30" (1168 mm x 762 mm)
Basin area, top:	57" x 34" (1448 mm x 864 mm)
Weight:	80 lbs (36.3 kg)
Minimum floor load:	47 lbs/ft² (229.5 kg/m²)
Water depth:	16" (406 mm)
Water capacity:	95 gal (359.6 L)
Template:	Drop-in, 1043292-7, required, included
Electrical component rating:	Heated Surface: 120 V, 0.5 A, 60 Hz, 65 W

# Notes

Measure your actual product for rough-in details. Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

