

Walraven VibraTek® SA-1 Silent Absorber


(L2 05 48)

silent rubber absorber for isolating metal to metal contact



Свойства и преимущества

- a versatile viscoelastic rubber absorber for preventing metal-to-metal contact in joined or fastened surfaces
- simple installation
- with \varnothing 8mm hole for use with M8 threaded rods
- prevents transmission of vibration and noise

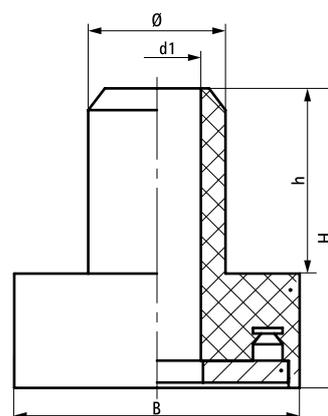

Арт. №	B (мм)	H (мм)	h (мм)	d1 (мм)	Ø (мм)	Min. Load (Н)	Max. Load (Н)	Min. Optimal Load (Н)	Max. Optimal Load (Н)	Max. Deflection (мм)	Уп.мин
2800900300	Ø 26	27,5	17	Ø 8	12,5	5	300	10	180	3,0	400