

# Features

- Multifunction handshower offers wide coverage and concentrated spray settings.
- Ergonomic design is comfortable and easy to grip.
- MasterClean<sup>™</sup> sprayface is easy-to-clean.
- 2.5 gpm (9.5 lpm) maximum flow rate.

# Material

KOHLER finishes resist corrosion and tarnishing.

### Installation

- Bracket or slidebar required for wall-mount installation.
- Deck-mount holder required for deck-mount installation.

# **Required Products/Accessories**

K-8593 72" Shower Hose K-9660 Vacuum Breaker or K-9514 60" Shower Hose

K-9514 60" Snower Hose K-9660 Vacuum Breaker or

K-45981 72" ribbon hose K-9660 Vacuum Breaker

or

K-45982 60" ribbon hose K-9660 Vacuum Breaker

# **Recommended Products/Accessories**

K-23723 Faucet cleaner



овс

# Codes/Standards

ASME A112.18.1/CSA B125.1 DOE - Energy Policy Act 1992 OBC

# KOHLER<sup>®</sup> Faucet Lifetime Limited Warranty

See website for detailed warranty information.

# **Available Colors/Finishes**

Color tiles intended for reference only.

#### Color Code Description

- SN Vibrant® Polished Nickel
- BN Vibrant® Brushed Nickel
- BV Vibrant® Brushed Bronze
- 2BZ Oil-Rubbed Bronze
  - BL Matte Black




# Shift<sup>®</sup> Ellipse

# Multifunction Handshower

# KOHLER. Faucets

# Shift<sup>®</sup> Ellipse Multifunction Handshower K-10257

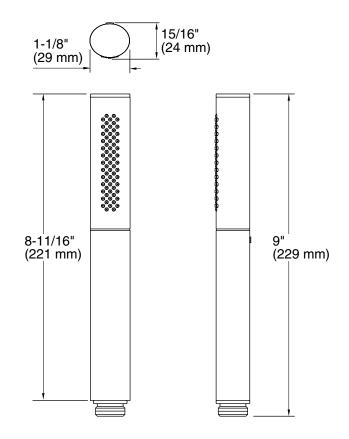

# **Technical Information**

All product dimensions are nominal.

#### Handshower:

Rated maximum flow:2.5 gal/min (9.5 l/min)Pressure:80 psi (5.5 bar)

#### Notes

Install this product according to the installation guide.

Plumbing codes require an atmospheric vacuum breaker (such as Kohler Model K-9660) be installed in-line with handshowers. Please consult with local plumbing officials.

NOTE: Handshower contains flow regulating check valve for backflow prevention.

OBC compliant when installed to the specific requirements of these regulations.

