

27 803 892




- COMPACT RAIN, max. flow rate 6.8 l/min (at 3 bar)
- three settings: normal flow, soft flow, massage flow
- with anti-scale system
- 1/2" shower outlet
- rosette for wall elbow Ø 55mm
- rosette for shower holder Ø 55mm
- metal shower hose 1250mm with integrated anti-twist protection
- 1/2" wall elbow
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB

Intrinsic protection against back flow.

	Brushed Bronze	27 803 892-42 0010
	Chrome	27 803 892-00
	Chrome	27 803 892-00 0010
	Brushed Platinum	27 803 892-06
	Brushed Platinum	27 803 892-06 0010
	Platinum	27 803 892-08
	Platinum	27 803 892-08 0010
	Dark Chrome	27 803 892-19
	Dark Chrome	27 803 892-19 0010
	Brushed Durabronze (23kt Gold)	27 803 892-28 0010
	Brushed Durabronze (23kt Gold)	27 803 892-28
	Matte Black	27 803 892-33
	Matte Black	27 803 892-33 0010
	Brushed Bronze	27 803 892-42
	Brushed Champagne (22kt Gold)	27 803 892-46 0010
	Brushed Champagne (22kt Gold)	27 803 892-46
	Champagne (22kt Gold)	27 803 892-47 0010
	Champagne (22kt Gold)	27 803 892-47
	Brushed Chrome	27 803 892-93
	Brushed Chrome	27 803 892-93 0010
	Brushed Dark Platinum	27 803 892-99
	Brushed Dark Platinum	27 803 892-99 0010

27 803 892

mm [inches]

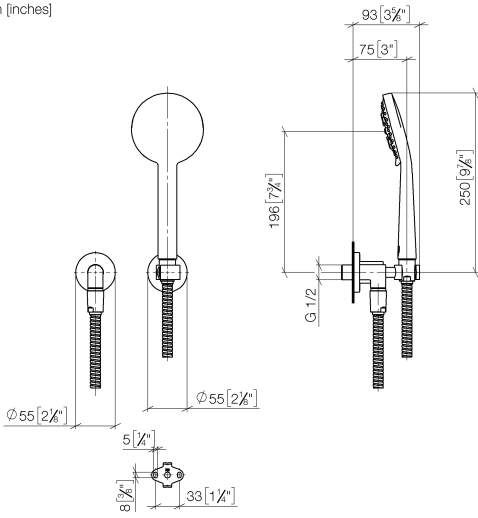

Flow rate chart



Codes & Standards

DIN 4109

ISO 3822

Ü-Zeichen



TARA Hand shower set with individual rosettes FlowReduce - Brushed Bronze

TARA

27 803 892


Certificates

LGA_29

27 803 892

Product version from 7/11/2018

Parts for other
finishes can be found
here: [Chrome](#)

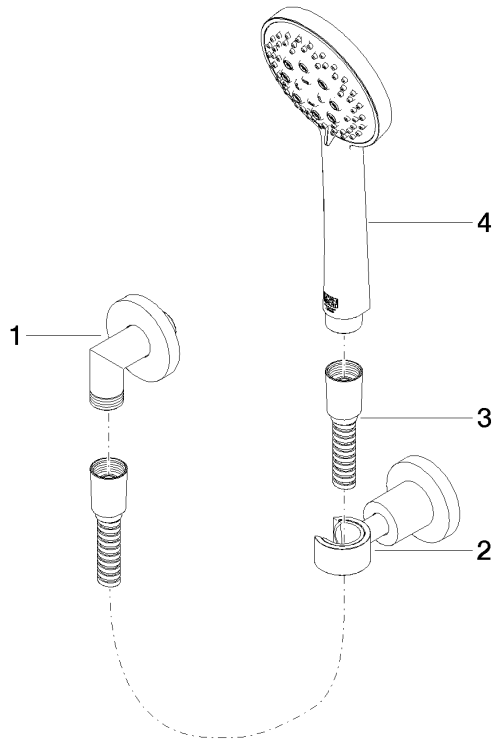



27 803 892

Spare parts list

Product version from 7/11/2018

No.	Item Number	Name	Quantity used	Delivery time
	28 450 892-42	connection	4	-

Spare part can no longer be ordered, please order the replacement item