
EASTON

EATF51

Easton Classic Gooseneck Concealed Tub Filler with Handshower and Metal Cross Handles

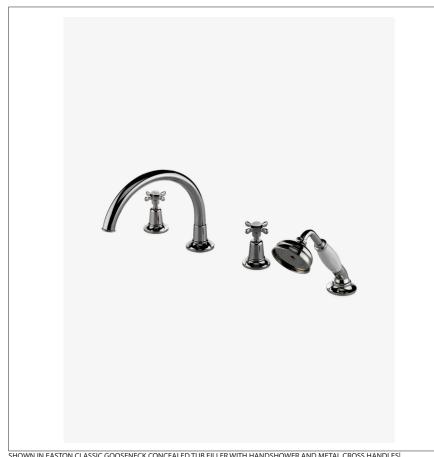

TECHNICAL DETAILS

ADA Compliance: No Adjustable versus Fixed Spray: Fixed Spray Deck Thickness Maximum: 1 1/2" Deck Thickness Minimum: 0" Diameter of Head: 3' Escutcheon Primary Material: Brass Fittings Hole Diameter: 1 3/8" Flow Restriction Options: 2.0, 1.75, 1.5, 0.92 Handle Spread Maximum: 12" Handle Spread Minimum: 10" Handle Turn Angle: Quarter Turn Handshower / Spray Hose Length: 79" Index Color / Finish and Material: White Porcelain Depth / Width: 12" Height: 8 3/4" Index Marking: Hot/Cold Inlet Connection Size: 3/4" Inlet Connection Type: Male NPT Adapter Inlet Supply Spread Maximum: 12" Inlet Supply Spread Minimum: 10" Installation Type: Deck Mounted Integrated Diverter: N Length: 16" Number of Handles: Three Number of Holes: Five Hole Pivot: N Primary Material: Brass Restricted Maximum Flow Rate: 2.5 gpm Spout Swivel: N Suggested Application: Bath Valve Material: ceramic Water Pressure Maximum: 85.0 psi Water Pressure Minimum: 20.0 psi Water Pressure Recommended: 45.0 psi

L SHOWN IN EASTON CLASSIC GOOSENECK CONCEALED TUB FILLER WITH HANDSHOWER AND METAL CROSS HANDLES

INSPIRATION

Drawing on Edwardian style, Easton is the most extensive Waterworks family; a range of moods and a selection of Code # EATU51: products from fittings to furniture.

CODES & STANDARDS

PRODUCT FEATURES

Brass metal is used for all trim and valve components

The manufacturing process encompasses casting, turning, forging, hand-fitting and hand polishing.

Easton has a clean-lined utilitarian profile, with a slightly elongated spout.

Standard flow rate is 2.5gpm for handshower only. Also available in high efficient flow options. Contact your sales associate or call 1 (800) 899-6757 for details.



EASTON

EATF51

Easton Classic Gooseneck Concealed Tub Filler with Handshower and Metal Cross Handles

