



DP

filter housings
for cartridges SX and BX

DP is a full range of housings for cartridge height at 5", 7", 10" and 20", especially designed to fit to both standard SX (DOE) cartridges and to BX cartridges with 45 mm double o-ring collar

HOUSINGS DP

FOR CARTRIDGES SX and BX

Housings DP fit to both standard SX (DOE) cartridges and to exclusive BX cartridges. The full range of Atlas Filtri® SX and BX cartridges is suitable to DP housing and provide the widest range of water filtration and treatment units.

Exclusive Mono, Duo and Trio patented and registered models are manufactured with the finest and most advanced materials under constant focus on innovative processing technologies and ceaseless modernization to ensure the absolute quality of our products. DP housings are suitable for every Point-of-Use (POU) and Point-of-Entry (POE) application, as single- or multi-stage on-line filters, under-sink filters, Reverse Osmosis pre-filtration units.

Housings DP S with discharge valve are provided with a drain funnel to protect potable water from pollution by back-flow, in compliance with **UNI EN 1717-11/2002**.



SX cartridges with standard flat seals.



BX cartridges with 45 mm double o-ring collar. Quick-fit connection for a perfect tightening.

CERTIFICATIONS



A range of housings is certified by IAPMO RT to NSF/ANSI 42, 61, 372 - lead free, CSA B483.1. In compliance with Drinking Water Treatment Units regulations, USA and Canada.



Housings are tested and certified under the most stringent procedures worldwide, in compliance with DM 25 (Italy), with the sanitary certification ACS (France), EAC/Ghostreghistrizia (Russia) and WaterMark (Australia).

SYMBOLS LEGEND



For domestic use



For technical and industrial use



Filter housings made in PET, a highly recyclable plastic, are manufactured with a proprietary procedure saving up to 60% of energy in injection molding compared with standard plastics. That is one of Atlas Filtri commitments to comply with Kyoto Treaty for the reduction of green house gas (CO₂) emissions in the atmosphere.

ACCESSORIES INCLUDED

DISCHARGE KIT FOR -S- MODELS



brass discharge ball-valve with gasket



plastic hose-holder



plastic nipple with o-ring



drain funnel

In compliance with the European Standard UNI EN 1717/2002: designed to prevent back-flow contamination by making all elements downstream the discharge vent to atmosphere (protection unit symbol: DC)



Filterfit - cartridge centering device

ACCESSORIES ON DEMAND

* white colour provided with housings BW (white)



DP-base* (only for DP 10 models)
CODE LB7402014



-X- spanner*
CODE RB7403017



-S- wall bracket* CODE RB7400007



-DUO- wall bracket* CODE RB7400017



-TRIO- wall bracket* CODE RB7400019



3/4" brass nipples with o-ring (pair) CODE RB7404001

1" brass nipples with o-ring (pair) CODE RB7404002



3/4" plastic nipple with o-ring CODE LB7404012



3/4"-1/4" plastic reduction with o-ring CODE LB9020611




-KIT AUTO- for S models CODE RE7120024
automatic discharge kit (see pages 186-187)



-LUBRIKIT- single-dose lubricant for housing o-ring
CODE RE9020650



DP MONO



WORKING CONDITIONS

Max working pressure: _____ 8 bar (116 psi)
 Max working temperature _____ 45°C (113°F)
 Min working temperature _____ 4°C (39,2°F)

SPECIFICATIONS

Non-toxic materials, suitable for drinking water.
 Head: reinforced polypropylene.
 Bowl: PET.
 O-ring: EPDM.
 Breather-valve: body stainless steel, o-ring EPDM.
 IN/OUT brass threads: CW 617 N brass.

DP MONO clear housings

HOUSINGS WITH BRASS BSP THREADS


| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|------------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA1350301 | DP 5 MONO 1/2" OT TS | 5" | 1/2" | 185 | 122 | 107 |
| RA1350401 | DP 5 MONO 3/4" OT TS | 5" | 3/4" | 185 | 122 | 107 |
| RA1350701 | DP 5 MONO 1" OT TS | 5" | 1" | 185 | 122 | 107 |
| RA1350801 | DP 5 MONO 1"1/4 OT TS | 5" | 1"1/4 | 220 | 124 | 107 |
| RA1350901 | DP 5 MONO 1"1/2 OT TS | 5" | 1"1/2 | 220 | 124 | 107 |
| RA1351301 | DP 7 MONO 1/2" OT TS | 7" | 1/2" | 233 | 122 | 107 |
| RA1351401 | DP 7 MONO 3/4" OT TS | 7" | 3/4" | 233 | 122 | 107 |
| RA1351701 | DP 7 MONO 1" OT TS | 7" | 1" | 233 | 122 | 107 |
| RA1351801 | DP 7 MONO 1"1/4 OT TS | 7" | 1"1/4 | 266 | 124 | 107 |
| RA1351901 | DP 7 MONO 1"1/2 OT TS | 7" | 1"1/2 | 266 | 124 | 107 |
| RA1380301 | DP 10 MONO 1/2" OT TS | 10" | 1/2" | 325 | 122 | 107 |
| RA1380401 | DP 10 MONO 3/4" OT TS | 10" | 3/4" | 325 | 122 | 107 |
| RA1380701 | DP 10 MONO 1" OT TS | 10" | 1" | 325 | 122 | 107 |
| RA1380801 | DP 10 MONO 1"1/4 OT TS | 10" | 1"1/4 | 343 | 124 | 107 |
| RA1380901 | DP 10 MONO 1"1/2 OT TS | 10" | 1"1/2 | 343 | 124 | 107 |
| RA1381301 | DP 20 MONO 1/2" OT TS | 20" | 1/2" | 577 | 122 | 107 |
| RA1381401 | DP 20 MONO 3/4" OT TS | 20" | 3/4" | 577 | 122 | 107 |
| RA1381701 | DP 20 MONO 1" OT TS | 20" | 1" | 577 | 122 | 107 |
| RA1381801 | DP 20 MONO 1"1/4 OT TS | 20" | 1"1/4 | 595 | 124 | 107 |
| RA1381901 | DP 20 MONO 1"1/2 OT TS | 20" | 1"1/2 | 595 | 124 | 107 |

HOUSINGS WITH PLASTIC BSP THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|-----------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA1350101 | DP 5 MONO 1/4" IN TS | 5" | 1/4" | 185 | 122 | 107 |
| RA1350201 | DP 5 MONO 3/8" IN TS | 5" | 3/8" | 185 | 122 | 107 |
| RA1350311 | DP 5 MONO 1/2" IN TS | 5" | 1/2" | 185 | 122 | 107 |
| RA1350411 | DP 5 MONO 3/4" IN TS | 5" | 3/4" | 185 | 122 | 107 |
| RA1350711 | DP 5 MONO 1" IN TS | 5" | 1" | 185 | 122 | 107 |
| RA1351101 | DP 7 MONO 1/4" IN TS | 7" | 1/4" | 233 | 122 | 107 |
| RA1351201 | DP 7 MONO 3/8" IN TS | 7" | 3/8" | 233 | 122 | 107 |
| RA1351311 | DP 7 MONO 1/2" IN TS | 7" | 1/2" | 233 | 122 | 107 |
| RA1351411 | DP 7 MONO 3/4" IN TS | 7" | 3/4" | 233 | 122 | 107 |
| RA1351711 | DP 7 MONO 1" IN TS | 7" | 1" | 233 | 122 | 107 |
| RA1380101 | DP 10 MONO 1/4" IN TS | 10" | 1/4" | 325 | 122 | 107 |
| RA1380201 | DP 10 MONO 3/8" IN TS | 10" | 3/8" | 325 | 122 | 107 |
| RA1380311 | DP 10 MONO 1/2" IN TS | 10" | 1/2" | 325 | 122 | 107 |
| RA1380411 | DP 10 MONO 3/4" IN TS | 10" | 3/4" | 325 | 122 | 107 |
| RA1380711 | DP 10 MONO 1" IN TS | 10" | 1" | 325 | 122 | 107 |
| RA1381311 | DP 20 MONO 1/2" IN TS | 20" | 1/2" | 577 | 122 | 107 |
| RA1381411 | DP 20 MONO 3/4" IN TS | 20" | 3/4" | 577 | 122 | 107 |
| RA1381711 | DP 20 MONO 1" IN TS | 20" | 1" | 577 | 122 | 107 |

VARIANTS AVAILABLE ON MINIMUM QUANTITY:

- RT housings suitable for filter cartridges with length 508 mm



WORKING CONDITIONS

Max working pressure:
 BSP versions _____ 8 bar (116 psi)
 NPT versions _____ 8,6 bar (125 psi)
 Max working temperature _____ 45°C (113°F)
 Min working temperature _____ 4°C (39,2°F)

SPECIFICATIONS

Non-toxic materials, suitable for drinking water.
 Head: reinforced polypropylene.
 Bowl: PET.
 O-ring: EPDM.
 Breather-valve: body stainless steel, o-ring EPDM.

HOUSINGS WITH PLASTIC NPT THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|---------------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA1350121 | DP 5 MONO 1/4" NPT IN TS | 5" | 1/4" | 185 | 122 | 107 |
| RA1350321 | DP 5 MONO 1/2" NPT IN TS | 5" | 1/2" | 185 | 122 | 107 |
| RA1350421 | DP 5 MONO 3/4" NPT IN TS | 5" | 3/4" | 185 | 122 | 107 |
| RA1350721 | DP 5 MONO 1" NPT IN TS | 5" | 1" | 185 | 122 | 107 |
| RA1351121 | DP 7 MONO 1/4" NPT IN TS | 7" | 1/4" | 233 | 122 | 107 |
| RA1351321 | DP 7 MONO 1/2" NPT IN TS | 7" | 1/2" | 233 | 122 | 107 |
| RA1351421 | DP 7 MONO 3/4" NPT IN TS | 7" | 3/4" | 233 | 122 | 107 |
| RA1351721 | DP 7 MONO 1" NPT IN TS | 7" | 1" | 233 | 122 | 107 |
| RA1380121 | DP 10 MONO 1/4" NPT IN TS | 10" | 1/4" | 325 | 122 | 107 |
| RA1380321 | DP 10 MONO 1/2" NPT IN TS | 10" | 1/2" | 325 | 122 | 107 |
| RA1380421 | DP 10 MONO 3/4" NPT IN TS | 10" | 3/4" | 325 | 122 | 107 |
| RA1380721 | DP 10 MONO 1" NPT IN TS | 10" | 1" | 325 | 122 | 107 |
| RA1381321 | DP 20 MONO 1/2" NPT IN TS | 20" | 1/2" | 577 | 122 | 107 |
| RA1381421 | DP 20 MONO 3/4" NPT IN TS | 20" | 3/4" | 577 | 122 | 107 |
| RA1381721 | DP 20 MONO 1" NPT IN TS | 20" | 1" | 577 | 122 | 107 |


HOUSINGS WITH PLASTIC BSP THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|-----------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA1350313 | DP 5 MONO 1/2" MP TS | 5" | 1/2" | 185 | 155 | 107 |
| RA1350413 | DP 5 MONO 3/4" MP TS | 5" | 3/4" | 185 | 155 | 107 |
| RA1350713 | DP 5 MONO 1" MP TS | 5" | 1" | 185 | 155 | 107 |
| RA1351313 | DP 7 MONO 1/2" MP TS | 7" | 1/2" | 233 | 155 | 107 |
| RA1351413 | DP 7 MONO 3/4" MP TS | 7" | 3/4" | 233 | 155 | 107 |
| RA1351713 | DP 7 MONO 1" MP TS | 7" | 1" | 233 | 155 | 107 |
| RA1380213 | DP 10 MONO 1/2" MP TS | 10" | 1/2" | 325 | 155 | 107 |
| RA1380513 | DP 10 MONO 3/4" MP TS | 10" | 3/4" | 325 | 155 | 107 |
| RA1380613 | DP 10 MONO 1" MP TS | 10" | 1" | 325 | 155 | 107 |
| RA1381323 | DP 20 MONO 1/2" MP TS | 20" | 1/2" | 577 | 155 | 107 |
| RA1381513 | DP 20 MONO 3/4" MP TS | 20" | 3/4" | 577 | 155 | 107 |
| RA1381613 | DP 20 MONO 1" MP TS | 20" | 1" | 577 | 155 | 107 |

VARIANTS AVAILABLE ON MINIMUM QUANTITY:

- RT housings suitable for filter cartridges with length 508 mm

Some items in the list are subject to minimum order quantities and/or to longer delivery term.



WORKING CONDITIONS

Max working pressure: _____ 8 bar (116 psi)
 Max working temperature _____ 45°C (113°F)
 Min working temperature _____ 4°C (39,2°F)

SPECIFICATIONS

Non-toxic materials, suitable for drinking water.
 Head: reinforced polypropylene.
 Bowl: PET.
 O-ring: EPDM.
 Breather-valve: body stainless steel, o-ring EPDM.
 IN/OUT brass threads: CW 617 N brass.

DP MONO blue housings

HOUSINGS WITH BRASS BSP THREADS


| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|------------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA1350302 | DP 5 MONO 1/2" OT AB | 5" | 1/2" | 185 | 122 | 107 |
| RA1350402 | DP 5 MONO 3/4" OT AB | 5" | 3/4" | 185 | 122 | 107 |
| RA1350702 | DP 5 MONO 1" OT AB | 5" | 1" | 185 | 122 | 107 |
| RA1350802 | DP 5 MONO 1"1/4 OT AB | 5" | 1"1/4 | 220 | 124 | 107 |
| RA1350902 | DP 5 MONO 1"1/2 OT AB | 5" | 1"1/2 | 220 | 124 | 107 |
| RA1351302 | DP 7 MONO 1/2" OT AB | 7" | 1/2" | 233 | 122 | 107 |
| RA1351402 | DP 7 MONO 3/4" OT AB | 7" | 3/4" | 233 | 122 | 107 |
| RA1351702 | DP 7 MONO 1" OT AB | 7" | 1" | 233 | 122 | 107 |
| RA1351802 | DP 7 MONO 1"1/4 OT AB | 7" | 1"1/4 | 266 | 124 | 107 |
| RA1351902 | DP 7 MONO 1"1/2 OT AB | 7" | 1"1/2 | 266 | 124 | 107 |
| RA1380302 | DP 10 MONO 1/2" OT AB | 10" | 1/2" | 325 | 122 | 107 |
| RA1380402 | DP 10 MONO 3/4" OT AB | 10" | 3/4" | 325 | 122 | 107 |
| RA1380702 | DP 10 MONO 1" OT AB | 10" | 1" | 325 | 122 | 107 |
| RA1380802 | DP 10 MONO 1"1/4 OT AB | 10" | 1"1/4 | 343 | 124 | 107 |
| RA1380902 | DP 10 MONO 1"1/2 OT AB | 10" | 1"1/2 | 343 | 124 | 107 |
| RA1381302 | DP 20 MONO 1/2" OT AB | 20" | 1/2" | 577 | 122 | 107 |
| RA1381402 | DP 20 MONO 3/4" OT AB | 20" | 3/4" | 577 | 122 | 107 |
| RA1381702 | DP 20 MONO 1" OT AB | 20" | 1" | 577 | 122 | 107 |
| RA1381802 | DP 20 MONO 1"1/4 OT AB | 20" | 1"1/4 | 595 | 124 | 107 |
| RA1381902 | DP 20 MONO 1"1/2 OT AB | 20" | 1"1/2 | 595 | 124 | 107 |

HOUSINGS WITH PLASTIC BSP THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|-----------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA1350102 | DP 5 MONO 1/4" IN AB | 5" | 1/4" | 185 | 122 | 107 |
| RA1350202 | DP 5 MONO 3/8" IN AB | 5" | 3/8" | 185 | 122 | 107 |
| RA1350312 | DP 5 MONO 1/2" IN AB | 5" | 1/2" | 185 | 122 | 107 |
| RA1350412 | DP 5 MONO 3/4" IN AB | 5" | 3/4" | 185 | 122 | 107 |
| RA1350712 | DP 5 MONO 1" IN AB | 5" | 1" | 185 | 122 | 107 |
| RA1351102 | DP 7 MONO 1/4" IN AB | 7" | 1/4" | 233 | 122 | 107 |
| RA1351212 | DP 7 MONO 3/8" IN AB | 7" | 3/8" | 233 | 122 | 107 |
| RA1351312 | DP 7 MONO 1/2" IN AB | 7" | 1/2" | 233 | 122 | 107 |
| RA1351412 | DP 7 MONO 3/4" IN AB | 7" | 3/4" | 233 | 122 | 107 |
| RA1351712 | DP 7 MONO 1" IN AB | 7" | 1" | 233 | 122 | 107 |
| RA1380102 | DP 10 MONO 1/4" IN AB | 10" | 1/4" | 325 | 122 | 107 |
| RA1380202 | DP 10 MONO 3/8" IN AB | 10" | 3/8" | 325 | 122 | 107 |
| RA1380312 | DP 10 MONO 1/2" IN AB | 10" | 1/2" | 325 | 122 | 107 |
| RA1380412 | DP 10 MONO 3/4" IN AB | 10" | 3/4" | 325 | 122 | 107 |
| RA1380712 | DP 10 MONO 1" IN AB | 10" | 1" | 325 | 122 | 107 |
| RA1381312 | DP 20 MONO 1/2" IN AB | 20" | 1/2" | 577 | 122 | 107 |
| RA1381412 | DP 20 MONO 3/4" IN AB | 20" | 3/4" | 577 | 122 | 107 |
| RA1381712 | DP 20 MONO 1" IN AB | 20" | 1" | 577 | 122 | 107 |

VARIANTS AVAILABLE ON MINIMUM QUANTITY:

- RT housings suitable for filter cartridges with length 508 mm



WORKING CONDITIONS

Max working pressure:
 BSP versions _____ 8 bar (116 psi)
 NPT versions _____ 8,6 bar (125 psi)
 Max working temperature _____ 45°C (113°F)
 Min working temperature _____ 4°C (39,2°F)

SPECIFICATIONS

Non-toxic materials, suitable for drinking water.
 Head: reinforced polypropylene.
 Bowl: PET.
 O-ring: EPDM.
 Breather-valve: body stainless steel, o-ring EPDM.

HOUSINGS WITH PLASTIC NPT THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|---------------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA1350122 | DP 5 MONO 1/4" NPT IN AB | 5" | 1/4" | 185 | 122 | 107 |
| RA1350322 | DP 5 MONO 1/2" NPT IN AB | 5" | 1/2" | 185 | 122 | 107 |
| RA1350422 | DP 5 MONO 3/4" NPT IN AB | 5" | 3/4" | 185 | 122 | 107 |
| RA1350722 | DP 5 MONO 1" NPT IN AB | 5" | 1" | 185 | 122 | 107 |
| RA1351122 | DP 7 MONO 1/4" NPT IN AB | 7" | 1/4" | 233 | 122 | 107 |
| RA1351322 | DP 7 MONO 1/2" NPT IN AB | 7" | 1/2" | 233 | 122 | 107 |
| RA1351422 | DP 7 MONO 3/4" NPT IN AB | 7" | 3/4" | 233 | 122 | 107 |
| RA1351722 | DP 7 MONO 1" NPT IN AB | 7" | 1" | 233 | 122 | 107 |
| RA1380122 | DP 10 MONO 1/4" NPT IN AB | 10" | 1/4" | 325 | 122 | 107 |
| RA1380322 | DP 10 MONO 1/2" NPT IN AB | 10" | 1/2" | 325 | 122 | 107 |
| RA1380422 | DP 10 MONO 3/4" NPT IN AB | 10" | 3/4" | 325 | 122 | 107 |
| RA1380722 | DP 10 MONO 1" NPT IN AB | 10" | 1" | 325 | 122 | 107 |
| RA1381322 | DP 20 MONO 1/2" NPT IN AB | 20" | 1/2" | 577 | 122 | 107 |
| RA1381422 | DP 20 MONO 3/4" NPT IN AB | 20" | 3/4" | 577 | 122 | 107 |
| RA1381722 | DP 20 MONO 1" NPT IN AB | 20" | 1" | 577 | 122 | 107 |


HOUSINGS WITH PLASTIC BSP THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|-----------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA1350314 | DP 5 MONO 1/2" MP AB | 5" | 1/2" | 185 | 155 | 107 |
| RA1350414 | DP 5 MONO 3/4" MP AB | 5" | 3/4" | 185 | 155 | 107 |
| RA1350714 | DP 5 MONO 1" MP AB | 5" | 1" | 185 | 155 | 107 |
| RA1351314 | DP 7 MONO 1/2" MP AB | 7" | 1/2" | 233 | 155 | 107 |
| RA1351414 | DP 7 MONO 3/4" MP AB | 7" | 3/4" | 233 | 155 | 107 |
| RA1351714 | DP 7 MONO 1" MP AB | 7" | 1" | 233 | 155 | 107 |
| RA1380214 | DP 10 MONO 1/2" MP AB | 10" | 1/2" | 325 | 155 | 107 |
| RA1380514 | DP 10 MONO 3/4" MP AB | 10" | 3/4" | 325 | 155 | 107 |
| RA1380614 | DP 10 MONO 1" MP AB | 10" | 1" | 325 | 155 | 107 |
| RA1381324 | DP 20 MONO 1/2" MP AB | 20" | 1/2" | 577 | 155 | 107 |
| RA1381514 | DP 20 MONO 3/4" MP AB | 20" | 3/4" | 577 | 155 | 107 |
| RA1381614 | DP 20 MONO 1" MP AB | 20" | 1" | 577 | 155 | 107 |

VARIANTS AVAILABLE ON MINIMUM QUANTITY:

- RT housings suitable for filter cartridges with length 508 mm

Some items in the list are subject to minimum order quantities and/or to longer delivery term.



WORKING CONDITIONS

Max working pressure: _____ 8 bar (116 psi)
 Max working temperature _____ 45°C (113°F)
 Min working temperature _____ 4°C (39,2°F)

SPECIFICATIONS

Non-toxic materials, suitable for drinking water.
 Head: reinforced polypropylene.
 Bowl: PET.
 O-ring: EPDM.
 Breather-valve: body stainless steel, o-ring EPDM.
 IN/OUT brass threads: CW 617 N brass.

DP MONO white housings

HOUSINGS WITH BRASS BSP THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|------------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA1350306 | DP 5 MONO 1/2" OT BW | 5" | 1/2" | 185 | 122 | 107 |
| RA1350406 | DP 5 MONO 3/4" OT BW | 5" | 3/4" | 185 | 122 | 107 |
| RA1350706 | DP 5 MONO 1" OT BW | 5" | 1" | 185 | 122 | 107 |
| RA1350806 | DP 5 MONO 1"1/4 OT BW | 5" | 1"1/4 | 220 | 124 | 107 |
| RA1350906 | DP 5 MONO 1"1/2 OT BW | 5" | 1"1/2 | 220 | 124 | 107 |
| RA1351306 | DP 7 MONO 1/2" OT BW | 7" | 1/2" | 233 | 122 | 107 |
| RA1351406 | DP 7 MONO 3/4" OT BW | 7" | 3/4" | 233 | 122 | 107 |
| RA1351706 | DP 7 MONO 1" OT BW | 7" | 1" | 233 | 122 | 107 |
| RA1351806 | DP 7 MONO 1"1/4 OT BW | 7" | 1"1/4 | 266 | 124 | 107 |
| RA1351906 | DP 7 MONO 1"1/2 OT BW | 7" | 1"1/2 | 266 | 124 | 107 |
| RA1380306 | DP 10 MONO 1/2" OT BW | 10" | 1/2" | 325 | 122 | 107 |
| RA1380406 | DP 10 MONO 3/4" OT BW | 10" | 3/4" | 325 | 122 | 107 |
| RA1380706 | DP 10 MONO 1" OT BW | 10" | 1" | 325 | 122 | 107 |
| RA1380806 | DP 10 MONO 1"1/4 OT BW | 10" | 1"1/4 | 343 | 124 | 107 |
| RA1380906 | DP 10 MONO 1"1/2 OT BW | 10" | 1"1/2 | 343 | 124 | 107 |
| RA1381306 | DP 20 MONO 1/2" OT BW | 20" | 1/2" | 577 | 122 | 107 |
| RA1381406 | DP 20 MONO 3/4" OT BW | 20" | 3/4" | 577 | 122 | 107 |
| RA1381706 | DP 20 MONO 1" OT BW | 20" | 1" | 577 | 122 | 107 |
| RA1381806 | DP 20 MONO 1"1/4 OT BW | 20" | 1"1/4 | 595 | 124 | 107 |
| RA1381906 | DP 20 MONO 1"1/2 OT BW | 20" | 1"1/2 | 595 | 124 | 107 |


HOUSINGS WITH PLASTIC BSP THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|-----------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA1350106 | DP 5 MONO 1/4" IN BW | 5" | 1/4" | 185 | 122 | 107 |
| RA1350206 | DP 5 MONO 3/8" IN BW | 5" | 3/8" | 185 | 122 | 107 |
| RA1350316 | DP 5 MONO 1/2" IN BW | 5" | 1/2" | 185 | 122 | 107 |
| RA1350416 | DP 5 MONO 3/4" IN BW | 5" | 3/4" | 185 | 122 | 107 |
| RA1350716 | DP 5 MONO 1" IN BW | 5" | 1" | 185 | 122 | 107 |
| RA1351106 | DP 7 MONO 1/4" IN BW | 7" | 1/4" | 233 | 122 | 107 |
| RA1351206 | DP 7 MONO 3/8" IN BW | 7" | 3/8" | 233 | 122 | 107 |
| RA1351316 | DP 7 MONO 1/2" IN BW | 7" | 1/2" | 233 | 122 | 107 |
| RA1351416 | DP 7 MONO 3/4" IN BW | 7" | 3/4" | 233 | 122 | 107 |
| RA1351716 | DP 7 MONO 1" IN BW | 7" | 1" | 233 | 122 | 107 |
| RA1380106 | DP 10 MONO 1/4" IN BW | 10" | 1/4" | 325 | 122 | 107 |
| RA1380206 | DP 10 MONO 3/8" IN BW | 10" | 3/8" | 325 | 122 | 107 |
| RA1380316 | DP 10 MONO 1/2" IN BW | 10" | 1/2" | 325 | 122 | 107 |
| RA1380416 | DP 10 MONO 3/4" IN BW | 10" | 3/4" | 325 | 122 | 107 |
| RA1380716 | DP 10 MONO 1" IN BW | 10" | 1" | 325 | 122 | 107 |
| RA1381316 | DP 20 MONO 1/2" IN BW | 20" | 1/2" | 577 | 122 | 107 |
| RA1381416 | DP 20 MONO 3/4" IN BW | 20" | 3/4" | 577 | 122 | 107 |
| RA1381716 | DP 20 MONO 1" IN BW | 20" | 1" | 577 | 122 | 107 |

VARIANTS AVAILABLE ON MINIMUM QUANTITY:

- RT housings suitable for filter cartridges with length 508 mm

Some items in the list are subject to minimum order quantities and/or to longer delivery term.



WORKING CONDITIONS

Max working pressure:
 BSP versions _____ 8 bar (116 psi)
 NPT versions _____ 8,6 bar (125 psi)
 Max working temperature _____ 45°C (113°F)
 Min working temperature _____ 4°C (39,2°F)

SPECIFICATIONS

Non-toxic materials, suitable for drinking water.
 Head: reinforced polypropylene.
 Bowl: PET.
 O-ring: EPDM.
 Breather-valve: body stainless steel, o-ring EPDM.

HOUSINGS WITH PLASTIC NPT THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|---------------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA1350116 | DP 5 MONO 1/4" NPT IN BW | 5" | 1/4" | 185 | 122 | 107 |
| RA1350326 | DP 5 MONO 1/2" NPT IN BW | 5" | 1/2" | 185 | 122 | 107 |
| RA1350426 | DP 5 MONO 3/4" NPT IN BW | 5" | 3/4" | 185 | 122 | 107 |
| RA1350726 | DP 5 MONO 1" NPT IN BW | 5" | 1" | 185 | 122 | 107 |
| RA1351126 | DP 7 MONO 1/4" NPT IN BW | 7" | 1/4" | 233 | 122 | 107 |
| RA1351326 | DP 7 MONO 1/2" NPT IN BW | 7" | 1/2" | 233 | 122 | 107 |
| RA1351426 | DP 7 MONO 3/4" NPT IN BW | 7" | 3/4" | 233 | 122 | 107 |
| RA1351726 | DP 7 MONO 1" NPT IN BW | 7" | 1" | 233 | 122 | 107 |
| RA1380126 | DP 10 MONO 1/4" NPT IN BW | 10" | 1/4" | 325 | 122 | 107 |
| RA1380326 | DP 10 MONO 1/2" NPT IN BW | 10" | 1/2" | 325 | 122 | 107 |
| RA1380426 | DP 10 MONO 3/4" NPT IN BW | 10" | 3/4" | 325 | 122 | 107 |
| RA1380726 | DP 10 MONO 1" NPT IN BW | 10" | 1" | 325 | 122 | 107 |
| RA1381326 | DP 20 MONO 1/2" NPT IN BW | 20" | 1/2" | 577 | 122 | 107 |
| RA1381426 | DP 20 MONO 3/4" NPT IN BW | 20" | 3/4" | 577 | 122 | 107 |
| RA1381726 | DP 20 MONO 1" NPT IN BW | 20" | 1" | 577 | 122 | 107 |

HOUSINGS WITH PLASTIC BSP THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|-----------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA1350315 | DP 5 MONO 1/2" MP BW | 5" | 1/2" | 185 | 155 | 107 |
| RA1350415 | DP 5 MONO 3/4" MP BW | 5" | 3/4" | 185 | 155 | 107 |
| RA1350715 | DP 5 MONO 1" MP BW | 5" | 1" | 185 | 155 | 107 |
| RA1351315 | DP 7 MONO 1/2" MP BW | 7" | 1/2" | 233 | 155 | 107 |
| RA1351415 | DP 7 MONO 3/4" MP BW | 7" | 3/4" | 233 | 155 | 107 |
| RA1351715 | DP 7 MONO 1" MP BW | 7" | 1" | 233 | 155 | 107 |
| RA1380215 | DP 10 MONO 1/2" MP BW | 10" | 1/2" | 325 | 155 | 107 |
| RA1380515 | DP 10 MONO 3/4" MP BW | 10" | 3/4" | 325 | 155 | 107 |
| RA1380615 | DP 10 MONO 1" MP BW | 10" | 1" | 325 | 155 | 107 |
| RA1381325 | DP 20 MONO 1/2" MP BW | 20" | 1/2" | 577 | 155 | 107 |
| RA1381515 | DP 20 MONO 3/4" MP BW | 20" | 3/4" | 577 | 155 | 107 |
| RA1381615 | DP 20 MONO 1" MP BW | 20" | 1" | 577 | 155 | 107 |


VARIANTS AVAILABLE ON MINIMUM QUANTITY:

- RT housings suitable for filter cartridges with length 508 mm

Some items in the list are subject to minimum order quantities and/or to longer delivery term.



DP M MONO



WORKING CONDITIONS

Max working pressure:
 BSP versions _____ 8 bar (116 psi)
 NPT versions _____ 8,6 bar (125 psi)
 Max working temperature _____ 45°C (113°F)
 Min working temperature _____ 4°C (39,2°F)

SPECIFICATIONS

Non-toxic materials, suitable for drinking water.
 Head: reinforced polypropylene.
 Bowl: PET.
 O-ring: EPDM.
 IN/OUT brass threads: CW 617 N brass.
 Manometers: radial type, pressure range 0-12 bar, 0-170 psi.

DP M MONO clear housings with 2 manometers

HOUSINGS WITH BRASS BSP THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|---------------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA1350331 | DP M 5 MONO 1/2" OT TS | 5" | 1/2" | 232 | 122 | 107 |
| RA1350431 | DP M 5 MONO 3/4" OT TS | 5" | 3/4" | 232 | 122 | 107 |
| RA1350731 | DP M 5 MONO 1" OT TS | 5" | 1" | 232 | 122 | 107 |
| RA1350831 | DP M 5 MONO 1 1/4" OT TS | 5" | 1 1/4" | 267 | 124 | 107 |
| RA1350931 | DP M 5 MONO 1 1/2" OT TS | 5" | 1 1/2" | 267 | 124 | 107 |
| RA1351331 | DP M 7 MONO 1/2" OT TS | 7" | 1/2" | 280 | 122 | 107 |
| RA1351431 | DP M 7 MONO 3/4" OT TS | 7" | 3/4" | 280 | 122 | 107 |
| RA1351731 | DP M 7 MONO 1" OT TS | 7" | 1" | 280 | 122 | 107 |
| RA1351831 | DP M 7 MONO 1 1/4" OT TS | 7" | 1 1/4" | 313 | 124 | 107 |
| RA1351931 | DP M 7 MONO 1 1/2" OT TS | 7" | 1 1/2" | 313 | 124 | 107 |
| RA1380331 | DP M 10 MONO 1/2" OT TS | 10" | 1/2" | 372 | 122 | 107 |
| RA1380431 | DP M 10 MONO 3/4" OT TS | 10" | 3/4" | 372 | 122 | 107 |
| RA1380731 | DP M 10 MONO 1" OT TS | 10" | 1" | 372 | 122 | 107 |
| RA1380831 | DP M 10 MONO 1 1/4" OT TS | 10" | 1 1/4" | 390 | 124 | 107 |
| RA1380931 | DP M 10 MONO 1 1/2" OT TS | 10" | 1 1/2" | 390 | 124 | 107 |
| RA1381331 | DP M 20 MONO 1/2" OT TS | 20" | 1/2" | 632 | 122 | 107 |
| RA1381431 | DP M 20 MONO 3/4" OT TS | 20" | 3/4" | 632 | 122 | 107 |
| RA1381731 | DP M 20 MONO 1" OT TS | 20" | 1" | 632 | 122 | 107 |
| RA1381831 | DP M 20 MONO 1 1/4" OT TS | 20" | 1 1/4" | 643 | 124 | 107 |
| RA1381931 | DP M 20 MONO 1 1/2" OT TS | 20" | 1 1/2" | 643 | 124 | 107 |

HOUSINGS WITH PLASTIC BSP THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|-------------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA1350351 | DP M 5 MONO 1/2" IN TS | 5" | 1/2" | 232 | 122 | 107 |
| RA1350451 | DP M 5 MONO 3/4" IN TS | 5" | 3/4" | 232 | 122 | 107 |
| RA1350751 | DP M 5 MONO 1" IN TS | 5" | 1" | 232 | 122 | 107 |
| RA1351351 | DP M 7 MONO 1/2" IN TS | 7" | 1/2" | 280 | 122 | 107 |
| RA1351451 | DP M 7 MONO 3/4" IN TS | 7" | 3/4" | 280 | 122 | 107 |
| RA1351751 | DP M 7 MONO 1" IN TS | 7" | 1" | 280 | 122 | 107 |
| RA1380351 | DP M 10 MONO 1/2" IN TS | 10" | 1/2" | 372 | 122 | 107 |
| RA1380451 | DP M 10 MONO 3/4" IN TS | 10" | 3/4" | 372 | 122 | 107 |
| RA1380751 | DP M 10 MONO 1" IN TS | 10" | 1" | 372 | 122 | 107 |
| RA1381351 | DP M 20 MONO 1/2" IN TS | 20" | 1/2" | 632 | 122 | 107 |
| RA1381451 | DP M 20 MONO 3/4" IN TS | 20" | 3/4" | 643 | 122 | 107 |
| RA1381751 | DP M 20 MONO 1" IN TS | 20" | 1" | 643 | 122 | 107 |


HOUSINGS WITH PLASTIC NPT THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|-----------------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA1350441 | DP M 5 MONO 3/4" NPT IN TS | 5" | 3/4" | 232 | 122 | 107 |
| RA1350741 | DP M 5 MONO 1" NPT IN TS | 5" | 1" | 232 | 122 | 107 |
| RA1351441 | DP M 7 MONO 3/4" NPT IN TS | 7" | 3/4" | 280 | 122 | 107 |
| RA1351741 | DP M 7 MONO 1" NPT IN TS | 7" | 1" | 280 | 122 | 107 |
| RA1380441 | DP M 10 MONO 3/4" NPT IN TS | 10" | 3/4" | 372 | 122 | 107 |
| RA1380741 | DP M 10 MONO 1" NPT IN TS | 10" | 1" | 372 | 122 | 107 |
| RA1381441 | DP M 20 MONO 3/4" NPT IN TS | 20" | 3/4" | 643 | 122 | 107 |
| RA1381741 | DP M 20 MONO 1" NPT IN TS | 20" | 1" | 643 | 122 | 107 |

VARIANTS AVAILABLE ON MINIMUM QUANTITY:

- RT housings suitable for filter cartridges with length 508 mm

Some items in the list are subject to minimum order quantities and/or to longer delivery term.



WORKING CONDITIONS

Max working pressure:
 BSP versions _____ 8 bar (116 psi)
 NPT versions _____ 8,6 bar (125 psi)
 Max working temperature _____ 45°C (113°F)
 Min working temperature _____ 4°C (39,2°F)

SPECIFICATIONS

Non-toxic materials, suitable for drinking water.
 Head: reinforced polypropylene.
 Bowl: PET.
 O-ring: EPDM.
 IN/OUT brass threads: CW 617 N brass.
 Manometers: radial type, pressure range 0-12 bar, 0-170 psi.

DP M MONO blue housings with 2 manometers

HOUSINGS WITH BRASS BSP THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|--------------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA1350332 | DP M 5 MONO 1/2" OT AB | 5" | 1/2" | 232 | 122 | 107 |
| RA1350432 | DP M 5 MONO 3/4" OT AB | 5" | 3/4" | 232 | 122 | 107 |
| RA1350732 | DP M 5 MONO 1" OT AB | 5" | 1" | 232 | 122 | 107 |
| RA1350832 | DP M 5 MONO 1"1/4 OT AB | 5" | 1"1/4 | 267 | 124 | 107 |
| RA1350932 | DP M 5 MONO 1"1/2 OT AB | 5" | 1"1/2 | 267 | 124 | 107 |
| RA1351332 | DP M 7 MONO 1/2" OT AB | 7" | 1/2" | 280 | 122 | 107 |
| RA1351432 | DP M 7 MONO 3/4" OT AB | 7" | 3/4" | 280 | 122 | 107 |
| RA1351732 | DP M 7 MONO 1" OT AB | 7" | 1" | 280 | 122 | 107 |
| RA1351832 | DP M 7 MONO 1"1/4 OT AB | 7" | 1"1/4 | 313 | 124 | 107 |
| RA1351932 | DP M 7 MONO 1"1/2 OT AB | 7" | 1"1/2 | 313 | 124 | 107 |
| RA1380332 | DP M 10 MONO 1/2" OT AB | 10" | 1/2" | 372 | 122 | 107 |
| RA1380432 | DP M 10 MONO 3/4" OT AB | 10" | 3/4" | 372 | 122 | 107 |
| RA1380732 | DP M 10 MONO 1" OT AB | 10" | 1" | 372 | 122 | 107 |
| RA1380832 | DP M 10 MONO 1"1/4 OT AB | 10" | 1"1/4 | 390 | 124 | 107 |
| RA1380932 | DP M 10 MONO 1"1/2 OT AB | 10" | 1"1/2 | 390 | 124 | 107 |
| RA1381332 | DP M 20 MONO 1/2" OT AB | 20" | 1/2" | 632 | 122 | 107 |
| RA1381432 | DP M 20 MONO 3/4" OT AB | 20" | 3/4" | 632 | 122 | 107 |
| RA1381732 | DP M 20 MONO 1" OT AB | 20" | 1" | 632 | 122 | 107 |
| RA1381832 | DP M 20 MONO 1"1/4 OT AB | 20" | 1"1/4 | 643 | 124 | 107 |
| RA1381932 | DP M 20 MONO 1"1/2 OT AB | 20" | 1"1/2 | 643 | 124 | 107 |

HOUSINGS WITH PLASTIC BSP THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|-------------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA1350352 | DP M 5 MONO 1/2" IN AB | 5" | 1/2" | 232 | 122 | 107 |
| RA1350452 | DP M 5 MONO 3/4" IN AB | 5" | 3/4" | 232 | 122 | 107 |
| RA1350752 | DP M 5 MONO 1" IN AB | 5" | 1" | 232 | 122 | 107 |
| RA1351352 | DP M 7 MONO 1/2" IN AB | 7" | 1/2" | 280 | 122 | 107 |
| RA1351452 | DP M 7 MONO 3/4" IN AB | 7" | 3/4" | 280 | 122 | 107 |
| RA1351752 | DP M 7 MONO 1" IN AB | 7" | 1" | 280 | 122 | 107 |
| RA1380352 | DP M 10 MONO 1/2" IN AB | 10" | 1/2" | 372 | 122 | 107 |
| RA1380452 | DP M 10 MONO 3/4" IN AB | 10" | 3/4" | 372 | 122 | 107 |
| RA1380752 | DP M 10 MONO 1" IN AB | 10" | 1" | 372 | 122 | 107 |
| RA1381352 | DP M 20 MONO 1/2" IN AB | 20" | 1/2" | 632 | 122 | 107 |
| RA1381452 | DP M 20 MONO 3/4" IN AB | 20" | 3/4" | 643 | 122 | 107 |
| RA1381752 | DP M 20 MONO 1" IN AB | 20" | 1" | 643 | 122 | 107 |


HOUSINGS WITH PLASTIC NPT THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|-----------------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA1350442 | DP M 5 MONO 3/4" NPT IN AB | 5" | 3/4" | 232 | 122 | 107 |
| RA1350742 | DP M 5 MONO 1" NPT IN AB | 5" | 1" | 232 | 122 | 107 |
| RA1351442 | DP M 7 MONO 3/4" NPT IN AB | 7" | 3/4" | 280 | 122 | 107 |
| RA1351742 | DP M 7 MONO 1" NPT IN AB | 7" | 1" | 280 | 122 | 107 |
| RA1380442 | DP M 10 MONO 3/4" NPT IN AB | 10" | 3/4" | 372 | 122 | 107 |
| RA1380742 | DP M 10 MONO 1" NPT IN AB | 10" | 1" | 372 | 122 | 107 |
| RA1381442 | DP M 20 MONO 3/4" NPT IN AB | 20" | 3/4" | 643 | 122 | 107 |
| RA1381742 | DP M 20 MONO 1" NPT IN AB | 20" | 1" | 643 | 122 | 107 |

VARIANTS AVAILABLE ON MINIMUM QUANTITY:

- RT housings suitable for filter cartridges with length 508 mm

Some items in the list are subject to minimum order quantities and/or to longer delivery term.



WORKING CONDITIONS

Max working pressure:
 BSP versions _____ 8 bar (116 psi)
 NPT versions _____ 8,6 bar (125 psi)
 Max working temperature _____ 45°C (113°F)
 Min working temperature _____ 4°C (39,2°F)

SPECIFICATIONS

Non-toxic materials, suitable for drinking water.
 Head: reinforced polypropylene.
 Bowl: PET.
 O-ring: EPDM.
 IN/OUT brass threads: CW 617 N brass.
 Manometers: radial type, pressure range 0-12 bar, 0-170 psi.

DP M MONO white housings with 2 manometers

HOUSINGS WITH BRASS BSP THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|--------------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA1350336 | DP M 5 MONO 1/2" OT BW | 5" | 1/2" | 232 | 122 | 107 |
| RA1350436 | DP M 5 MONO 3/4" OT BW | 5" | 3/4" | 232 | 122 | 107 |
| RA1350736 | DP M 5 MONO 1" OT BW | 5" | 1" | 232 | 122 | 107 |
| RA1350836 | DP M 5 MONO 1"1/4 OT BW | 5" | 1"1/4 | 267 | 124 | 107 |
| RA1350936 | DP M 5 MONO 1"1/2 OT BW | 5" | 1"1/2 | 267 | 124 | 107 |
| RA1351336 | DP M 7 MONO 1/2" OT BW | 7" | 1/2" | 280 | 122 | 107 |
| RA1351436 | DP M 7 MONO 3/4" OT BW | 7" | 3/4" | 280 | 122 | 107 |
| RA1351736 | DP M 7 MONO 1" OT BW | 7" | 1" | 280 | 122 | 107 |
| RA1351836 | DP M 7 MONO 1"1/4 OT BW | 7" | 1"1/4 | 313 | 124 | 107 |
| RA1351936 | DP M 7 MONO 1"1/2 OT BW | 7" | 1"1/2 | 313 | 124 | 107 |
| RA1380336 | DP M 10 MONO 1/2" OT BW | 10" | 1/2" | 372 | 122 | 107 |
| RA1380436 | DP M 10 MONO 3/4" OT BW | 10" | 3/4" | 372 | 122 | 107 |
| RA1380736 | DP M 10 MONO 1" OT BW | 10" | 1" | 372 | 122 | 107 |
| RA1380836 | DP M 10 MONO 1"1/4 OT BW | 10" | 1"1/4 | 390 | 124 | 107 |
| RA1380936 | DP M 10 MONO 1"1/2 OT BW | 10" | 1"1/2 | 390 | 124 | 107 |
| RA1381336 | DP M 20 MONO 1/2" OT BW | 20" | 1/2" | 632 | 122 | 107 |
| RA1381436 | DP M 20 MONO 3/4" OT BW | 20" | 3/4" | 632 | 122 | 107 |
| RA1381736 | DP M 20 MONO 1" OT BW | 20" | 1" | 632 | 122 | 107 |
| RA1381836 | DP M 20 MONO 1"1/4 OT BW | 20" | 1"1/4 | 643 | 124 | 107 |
| RA1381936 | DP M 20 MONO 1"1/2 OT BW | 20" | 1"1/2 | 643 | 124 | 107 |

HOUSINGS WITH PLASTIC BSP THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|-------------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA1350356 | DP M 5 MONO 1/2" IN BW | 5" | 1/2" | 232 | 122 | 107 |
| RA1350456 | DP M 5 MONO 3/4" IN BW | 5" | 3/4" | 232 | 122 | 107 |
| RA1350756 | DP M 5 MONO 1" IN BW | 5" | 1" | 232 | 122 | 107 |
| RA1351356 | DP M 7 MONO 1/2" IN BW | 7" | 1/2" | 280 | 122 | 107 |
| RA1351456 | DP M 7 MONO 3/4" IN BW | 7" | 3/4" | 280 | 122 | 107 |
| RA1351756 | DP M 7 MONO 1" IN BW | 7" | 1" | 280 | 122 | 107 |
| RA1380356 | DP M 10 MONO 1/2" IN BW | 10" | 1/2" | 372 | 122 | 107 |
| RA1380456 | DP M 10 MONO 3/4" IN BW | 10" | 3/4" | 372 | 122 | 107 |
| RA1380756 | DP M 10 MONO 1" IN BW | 10" | 1" | 372 | 122 | 107 |
| RA1381356 | DP M 20 MONO 1/2" IN BW | 20" | 1/2" | 632 | 122 | 107 |
| RA1381456 | DP M 20 MONO 3/4" IN BW | 20" | 3/4" | 643 | 122 | 107 |
| RA1381756 | DP M 20 MONO 1" IN BW | 20" | 1" | 643 | 122 | 107 |

HOUSINGS WITH PLASTIC NPT THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|-----------------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA1350446 | DP M 5 MONO 3/4" NPT IN BW | 5" | 3/4" | 232 | 122 | 107 |
| RA1350746 | DP M 5 MONO 1" NPT IN BW | 5" | 1" | 232 | 122 | 107 |
| RA1351446 | DP M 7 MONO 3/4" NPT IN BW | 7" | 3/4" | 280 | 122 | 107 |
| RA1351746 | DP M 7 MONO 1" NPT IN BW | 7" | 1" | 280 | 122 | 107 |
| RA1380446 | DP M 10 MONO 3/4" NPT IN BW | 10" | 3/4" | 372 | 122 | 107 |
| RA1380746 | DP M 10 MONO 1" NPT IN BW | 10" | 1" | 372 | 122 | 107 |
| RA1381446 | DP M 20 MONO 3/4" NPT IN BW | 20" | 3/4" | 643 | 122 | 107 |
| RA1381746 | DP M 20 MONO 1" NPT IN BW | 20" | 1" | 643 | 122 | 107 |

VARIANTS AVAILABLE ON MINIMUM QUANTITY:

- RT housings suitable for filter cartridges with length 508 mm

Some items in the list are subject to minimum order quantities and/or to longer delivery term.




DP S MONO only for BX cartridges

WORKING CONDITIONS

Max working pressure:
 BSP versions _____ 8 bar (116 psi)
 NPT versions _____ 8,6 bar (125 psi)
 Max working temperature _____ 45°C (113°F)
 Min working temperature _____ 4°C (39,2°F)

SPECIFICATIONS

Non-toxic materials, suitable for drinking water.
 Head: reinforced polypropylene.
 Bowl: PET.
 O-ring: EPDM.
 Breather-valve: body stainless steel, o-ring EPDM.
 IN/OUT brass threads: CW 617 N brass.
 Discharge ball-valve: CW 617 N brass nickel plated.
 Discharge plastic nipple: reinforced polypropylene.
 Drain funnel: reinforced polypropylene.

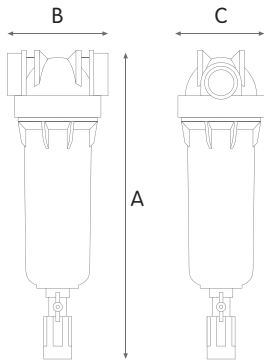

DRAIN FUNNEL
 Back-flow preventing device
 UNI EN 1717-11/2002

DP FILTER HOUSINGS

DP S MONO clear housings with discharge valve

HOUSINGS WITH BRASS BSP THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|--------------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA1380303 | DP S 10 MONO 1/2" OT TS | 10" | 1/2" | 465 | 122 | 107 |
| RA1380403 | DP S 10 MONO 3/4" OT TS | 10" | 3/4" | 465 | 122 | 107 |
| RA1380703 | DP S 10 MONO 1" OT TS | 10" | 1" | 465 | 122 | 107 |
| RA1380803 | DP S 10 MONO 1"1/4 OT TS | 10" | 1"1/4" | 493 | 124 | 107 |
| RA1380903 | DP S 10 MONO 1"1/2 OT TS | 10" | 1"1/2" | 493 | 124 | 107 |
| RA1381303 | DP S 20 MONO 1/2" OT TS | 20" | 1/2" | 723 | 122 | 107 |
| RA1381403 | DP S 20 MONO 3/4" OT TS | 20" | 3/4" | 723 | 122 | 107 |
| RA1381703 | DP S 20 MONO 1" OT TS | 20" | 1" | 723 | 122 | 107 |
| RA1381803 | DP S 20 MONO 1"1/4 OT TS | 20" | 1"1/4" | 740 | 122 | 107 |
| RA1381903 | DP S 20 MONO 1"1/2 OT TS | 20" | 1"1/2" | 740 | 124 | 107 |

HOUSINGS WITH PLASTIC BSP THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|-------------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA1380313 | DP S 10 MONO 1/2" IN TS | 10" | 1/2" | 465 | 122 | 107 |
| RA1380413 | DP S 10 MONO 3/4" IN TS | 10" | 3/4" | 465 | 122 | 107 |
| RA1380713 | DP S 10 MONO 1" IN TS | 10" | 1" | 465 | 122 | 107 |
| RA1381313 | DP S 20 MONO 1/2" IN TS | 20" | 1/2" | 723 | 122 | 107 |
| RA1381413 | DP S 20 MONO 3/4" IN TS | 20" | 3/4" | 723 | 122 | 107 |
| RA1381713 | DP S 20 MONO 1" IN TS | 20" | 1" | 723 | 122 | 107 |

HOUSINGS WITH PLASTIC NPT THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|-----------------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA1380323 | DP S 10 MONO 1/2" NPT IN TS | 10" | 1/2" | 465 | 122 | 107 |
| RA1380423 | DP S 10 MONO 3/4" NPT IN TS | 10" | 3/4" | 465 | 122 | 107 |
| RA1380723 | DP S 10 MONO 1" NPT IN TS | 10" | 1" | 465 | 122 | 107 |
| RA1381343 | DP S 20 MONO 1/2" NPT IN TS | 20" | 1/2" | 723 | 122 | 107 |
| RA1381423 | DP S 20 MONO 3/4" NPT IN TS | 20" | 3/4" | 723 | 122 | 107 |
| RA1381723 | DP S 20 MONO 1" NPT IN TS | 20" | 1" | 723 | 122 | 107 |

HOUSINGS WITH PLASTIC BSP THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|-------------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA1380310 | DP S 10 MONO 1/2" MP TS | 10" | 1/2" | 465 | 155 | 107 |
| RA1380410 | DP S 10 MONO 3/4" MP TS | 10" | 3/4" | 465 | 155 | 107 |
| RA1380710 | DP S 10 MONO 1" MP TS | 10" | 1" | 465 | 155 | 107 |
| RA1381310 | DP S 20 MONO 1/2" MP TS | 20" | 1/2" | 723 | 155 | 107 |
| RA1381410 | DP S 20 MONO 3/4" MP TS | 20" | 3/4" | 723 | 155 | 107 |
| RA1381710 | DP S 20 MONO 1" MP TS | 20" | 1" | 723 | 155 | 107 |






DP S M MONO only for BX cartridges

WORKING CONDITIONS

Max working pressure:
 BSP versions _____ 8 bar (116 psi)
 NPT versions _____ 8,6 bar (125 psi)
 Max working temperature _____ 45°C (113°F)
 Min working temperature _____ 4°C (39,2°F)

SPECIFICATIONS

Non-toxic materials, suitable for drinking water.
 Head: reinforced polypropylene.
 Bowl: PET.
 O-ring: EPDM.
 IN/OUT brass threads: CW 617 N brass.
 Manometers: radial type, pressure range 0-12 bar, 0-170 psi.
 Discharge ball-valve: CW 617 N brass nickel plated.
 Discharge plastic nipple: reinforced polypropylene.
 Drain funnel: reinforced polypropylene.

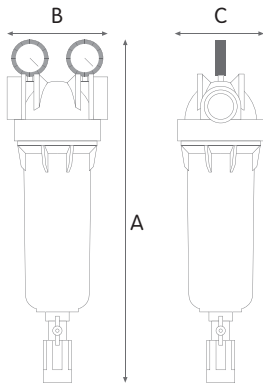

DRAIN FUNNEL
 Back-flow preventing device
 UNI EN 1717-11/2002

DP S M MONO clear housings with discharge valve and 2 manometers

HOUSINGS WITH BRASS BSP THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|----------------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA1380334 | DP S M 10 MONO 1/2" OT TS | 10" | 1/2" | 522 | 122 | 107 |
| RA1380434 | DP S M 10 MONO 3/4" OT TS | 10" | 3/4" | 522 | 122 | 107 |
| RA1380734 | DP S M 10 MONO 1" OT TS | 10" | 1" | 522 | 122 | 107 |
| RA1380834 | DP S M 10 MONO 1"1/4 OT TS | 10" | 1"1/4 | 540 | 124 | 107 |
| RA1380934 | DP S M 10 MONO 1"1/2 OT TS | 10" | 1"1/2 | 540 | 124 | 107 |
| RA1381334 | DP S M 20 MONO 1/2" OT TS | 20" | 1/2" | 776 | 122 | 107 |
| RA1381434 | DP S M 20 MONO 3/4" OT TS | 20" | 3/4" | 776 | 122 | 107 |
| RA1381734 | DP S M 20 MONO 1" OT TS | 20" | 1" | 776 | 122 | 107 |
| RA1381834 | DP S M 20 MONO 1"1/4 OT TS | 20" | 1"1/4 | 787 | 124 | 107 |
| RA1381934 | DP S M 20 MONO 1"1/2 OT TS | 20" | 1"1/2 | 787 | 124 | 107 |



HOUSINGS WITH PLASTIC BSP THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|---------------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA1380354 | DP S M 10 MONO 1/2" IN TS | 10" | 1/2" | 522 | 122 | 107 |
| RA1380454 | DP S M 10 MONO 3/4" IN TS | 10" | 3/4" | 522 | 122 | 107 |
| RA1380754 | DP S M 10 MONO 1" IN TS | 10" | 1" | 522 | 122 | 107 |
| RA1381354 | DP S M 20 MONO 1/2" IN TS | 20" | 1/2" | 776 | 122 | 107 |
| RA1381454 | DP S M 20 MONO 3/4" IN TS | 20" | 3/4" | 776 | 122 | 107 |
| RA1381754 | DP S M 20 MONO 1" IN TS | 20" | 1" | 776 | 122 | 107 |



HOUSINGS WITH PLASTIC NPT THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|-------------------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA1380444 | DP S M 10 MONO 3/4" NPT IN TS | 10" | 3/4" | 522 | 122 | 107 |
| RA1380744 | DP S M 10 MONO 1" NPT IN TS | 10" | 1" | 522 | 122 | 107 |
| RA1381444 | DP S M 20 MONO 3/4" NPT IN TS | 20" | 3/4" | 776 | 122 | 107 |
| RA1381744 | DP S M 20 MONO 1" NPT IN TS | 20" | 1" | 776 | 122 | 107 |

Some items in the list are subject to minimum order quantities and/or to longer delivery term.




DP DUO

SPECIFICATIONS

Non-toxic materials, suitable for drinking water.
 Head: reinforced polypropylene.
 Bowls: PET.
 O-rings: EPDM.
 Breather-valve: body stainless steel, o-ring EPDM.
 IN/OUT brass threads: CW 617 N brass.

WORKING CONDITIONS

Max working pressure:
 BSP versions _____ 8 bar (116 psi)
 NPT versions _____ 8,6 bar (125 psi)
 Max working temperature _____ 45°C (113°F)
 Min working temperature _____ 4°C (39,2°F)

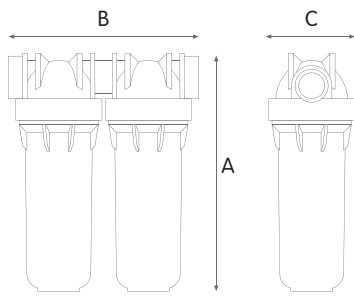

DP DUO clear housings

HOUSINGS WITH BRASS BSP THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|----------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA1360301 | DP 5 DUO 1/2" OT TS | 5" | 1/2" | 185 | 228 | 107 |
| RA1360401 | DP 5 DUO 3/4" OT TS | 5" | 3/4" | 185 | 228 | 107 |
| RA1360701 | DP 5 DUO 1" OT TS | 5" | 1" | 185 | 228 | 107 |
| RA1361301 | DP 7 DUO 1/2" OT TS | 7" | 1/2" | 233 | 228 | 107 |
| RA1361401 | DP 7 DUO 3/4" OT TS | 7" | 3/4" | 233 | 228 | 107 |
| RA1361701 | DP 7 DUO 1" OT TS | 7" | 1" | 233 | 228 | 107 |
| RA1390301 | DP 10 DUO 1/2" OT TS | 10" | 1/2" | 325 | 228 | 107 |
| RA1390401 | DP 10 DUO 3/4" OT TS | 10" | 3/4" | 325 | 228 | 107 |
| RA1390701 | DP 10 DUO 1" OT TS | 10" | 1" | 325 | 228 | 107 |
| RA1391301 | DP 20 DUO 1/2" OT TS | 20" | 1/2" | 577 | 228 | 107 |
| RA1391401 | DP 20 DUO 3/4" OT TS | 20" | 3/4" | 577 | 228 | 107 |
| RA1391701 | DP 20 DUO 1" OT TS | 20" | 1" | 577 | 228 | 107 |

HOUSINGS WITH PLASTIC BSP THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|----------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA1360101 | DP 5 DUO 1/4" IN TS | 5" | 1/4" | 185 | 228 | 107 |
| RA1360311 | DP 5 DUO 1/2" IN TS | 5" | 1/2" | 185 | 228 | 107 |
| RA1360411 | DP 5 DUO 3/4" IN TS | 5" | 3/4" | 185 | 228 | 107 |
| RA1360711 | DP 5 DUO 1" IN TS | 5" | 1" | 185 | 228 | 107 |
| RA1361101 | DP 7 DUO 1/4" IN TS | 7" | 1/4" | 233 | 228 | 107 |
| RA1361311 | DP 7 DUO 1/2" IN TS | 7" | 1/2" | 233 | 228 | 107 |
| RA1361411 | DP 7 DUO 3/4" IN TS | 7" | 3/4" | 233 | 228 | 107 |
| RA1361711 | DP 7 DUO 1" IN TS | 7" | 1" | 233 | 228 | 107 |
| RA1390101 | DP 10 DUO 1/4" IN TS | 10" | 1/4" | 325 | 228 | 107 |
| RA1390311 | DP 10 DUO 1/2" IN TS | 10" | 1/2" | 325 | 228 | 107 |
| RA1390411 | DP 10 DUO 3/4" IN TS | 10" | 3/4" | 325 | 228 | 107 |
| RA1390711 | DP 10 DUO 1" IN TS | 10" | 1" | 325 | 228 | 107 |
| RA1391311 | DP 20 DUO 1/2" IN TS | 20" | 1/2" | 577 | 228 | 107 |
| RA1391411 | DP 20 DUO 3/4" IN TS | 20" | 3/4" | 577 | 228 | 107 |
| RA1391711 | DP 20 DUO 1" IN TS | 20" | 1" | 577 | 228 | 107 |


HOUSINGS WITH PLASTIC NPT THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|--------------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA1360121 | DP 5 DUO 1/4" NPT IN TS | 5" | 1/4" | 185 | 228 | 107 |
| RA1360421 | DP 5 DUO 3/4" NPT IN TS | 5" | 3/4" | 185 | 228 | 107 |
| RA1360721 | DP 5 DUO 1" NPT IN TS | 5" | 1" | 185 | 228 | 107 |
| RA1361121 | DP 7 DUO 1/4" NPT IN TS | 7" | 1/4" | 233 | 228 | 107 |
| RA1361421 | DP 7 DUO 3/4" NPT IN TS | 7" | 3/4" | 233 | 228 | 107 |
| RA1361721 | DP 7 DUO 1" NPT IN TS | 7" | 1" | 233 | 228 | 107 |
| RA1390121 | DP 10 DUO 1/4" NPT IN TS | 10" | 1/4" | 325 | 228 | 107 |
| RA1390421 | DP 10 DUO 3/4" NPT IN TS | 10" | 3/4" | 325 | 228 | 107 |
| RA1390721 | DP 10 DUO 1" NPT IN TS | 10" | 1" | 325 | 228 | 107 |
| RA1391421 | DP 20 DUO 3/4" NPT IN TS | 20" | 3/4" | 577 | 228 | 107 |
| RA1391721 | DP 20 DUO 1" NPT IN TS | 20" | 1" | 577 | 228 | 107 |

VARIANTS AVAILABLE ON MINIMUM QUANTITY:

- RT housings suitable for filter cartridges with length 508 mm

Some items in the list are subject to minimum order quantities and/or to longer delivery term.

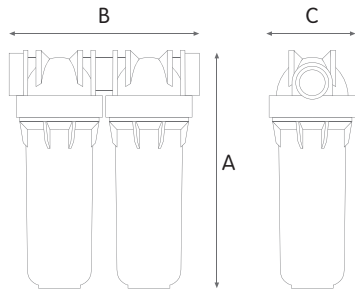

WORKING CONDITIONS

Max working pressure:
 BSP versions _____ 8 bar (116 psi)
 NPT versions _____ 8,6 bar (125 psi)
 Max working temperature _____ 45°C (113°F)
 Min working temperature _____ 4°C (39,2°F)

SPECIFICATIONS

Non-toxic materials, suitable for drinking water.
 Head: reinforced polypropylene.
 Bowls: PET.
 O-rings: EPDM.
 Breather-valve: body stainless steel, o-ring EPDM.
 IN/OUT brass threads: CW 617 N brass.

DP DUO blue housings

HOUSINGS WITH BRASS BSP THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|----------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA1360302 | DP 5 DUO 1/2" OT AB | 5" | 1/2" | 185 | 228 | 107 |
| RA1360402 | DP 5 DUO 3/4" OT AB | 5" | 3/4" | 185 | 228 | 107 |
| RA1360702 | DP 5 DUO 1" OT AB | 5" | 1" | 185 | 228 | 107 |
| RA1361302 | DP 7 DUO 1/2" OT AB | 7" | 1/2" | 233 | 228 | 107 |
| RA1361402 | DP 7 DUO 3/4" OT AB | 7" | 3/4" | 233 | 228 | 107 |
| RA1361702 | DP 7 DUO 1" OT AB | 7" | 1" | 233 | 228 | 107 |
| RA1390302 | DP 10 DUO 1/2" OT AB | 10" | 1/2" | 325 | 228 | 107 |
| RA1390402 | DP 10 DUO 3/4" OT AB | 10" | 3/4" | 325 | 228 | 107 |
| RA1390702 | DP 10 DUO 1" OT AB | 10" | 1" | 325 | 228 | 107 |
| RA1391302 | DP 20 DUO 1/2" OT AB | 20" | 1/2" | 577 | 228 | 107 |
| RA1391402 | DP 20 DUO 3/4" OT AB | 20" | 3/4" | 577 | 228 | 107 |
| RA1391702 | DP 20 DUO 1" OT AB | 20" | 1" | 577 | 228 | 107 |

HOUSINGS WITH PLASTIC BSP THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|----------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA1360102 | DP 5 DUO 1/4" IN AB | 5" | 1/4" | 185 | 228 | 107 |
| RA1360312 | DP 5 DUO 1/2" IN AB | 5" | 1/2" | 185 | 228 | 107 |
| RA1360412 | DP 5 DUO 3/4" IN AB | 5" | 3/4" | 185 | 228 | 107 |
| RA1360712 | DP 5 DUO 1" IN AB | 5" | 1" | 185 | 228 | 107 |
| RA1361112 | DP 7 DUO 1/4" IN AB | 7" | 1/4" | 233 | 228 | 107 |
| RA1361312 | DP 7 DUO 1/2" IN AB | 7" | 1/2" | 233 | 228 | 107 |
| RA1361412 | DP 7 DUO 3/4" IN AB | 7" | 3/4" | 233 | 228 | 107 |
| RA1361712 | DP 7 DUO 1" IN AB | 7" | 1" | 233 | 228 | 107 |
| RA1390102 | DP 10 DUO 1/4" IN AB | 10" | 1/4" | 325 | 228 | 107 |
| RA1390312 | DP 10 DUO 1/2" IN AB | 10" | 1/2" | 325 | 228 | 107 |
| RA1390412 | DP 10 DUO 3/4" IN AB | 10" | 3/4" | 325 | 228 | 107 |
| RA1390712 | DP 10 DUO 1" IN AB | 10" | 1" | 325 | 228 | 107 |
| RA1391312 | DP 20 DUO 1/2" IN AB | 20" | 1/2" | 577 | 228 | 107 |
| RA1391412 | DP 20 DUO 3/4" IN AB | 20" | 3/4" | 577 | 228 | 107 |
| RA1391712 | DP 20 DUO 1" IN AB | 20" | 1" | 577 | 228 | 107 |


HOUSINGS WITH PLASTIC NPT THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|--------------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA1360122 | DP 5 DUO 1/4" NPT IN AB | 5" | 1/4" | 185 | 228 | 107 |
| RA1360422 | DP 5 DUO 3/4" NPT IN AB | 5" | 3/4" | 185 | 228 | 107 |
| RA1360722 | DP 5 DUO 1" NPT IN AB | 5" | 1" | 185 | 228 | 107 |
| RA1361122 | DP 7 DUO 1/4" NPT IN AB | 7" | 1/4" | 233 | 228 | 107 |
| RA1361422 | DP 7 DUO 3/4" NPT IN AB | 7" | 3/4" | 233 | 228 | 107 |
| RA1361722 | DP 7 DUO 1" NPT IN AB | 7" | 1" | 233 | 228 | 107 |
| RA1390122 | DP 10 DUO 1/4" NPT IN AB | 10" | 1/4" | 325 | 228 | 107 |
| RA1390422 | DP 10 DUO 3/4" NPT IN AB | 10" | 3/4" | 325 | 228 | 107 |
| RA1390722 | DP 10 DUO 1" NPT IN AB | 10" | 1" | 325 | 228 | 107 |
| RA1391422 | DP 20 DUO 3/4" NPT IN AB | 20" | 3/4" | 577 | 228 | 107 |
| RA1391722 | DP 20 DUO 1" NPT IN AB | 20" | 1" | 577 | 228 | 107 |

VARIANTS AVAILABLE ON MINIMUM QUANTITY:

- RT housings suitable for filter cartridges with length 508 mm

Some items in the list are subject to minimum order quantities and/or to longer delivery term.

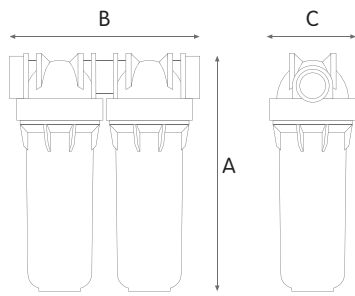

WORKING CONDITIONS

Max working pressure:
 BSP versions _____ 8 bar (116 psi)
 NPT versions _____ 8,6 bar (125 psi)
 Max working temperature _____ 45°C (113°F)
 Min working temperature _____ 4°C (39,2°F)

SPECIFICATIONS

Non-toxic materials, suitable for drinking water.
 Head: reinforced polypropylene.
 Bowls: PET.
 O-rings: EPDM.
 Breather-valve: body stainless steel, o-ring EPDM.
 IN/OUT brass threads: CW 617 N brass.

DP DUO white housings

HOUSINGS WITH BRASS BSP THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|----------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA1360306 | DP 5 DUO 1/2" OT BW | 5" | 1/2" | 185 | 228 | 107 |
| RA1360406 | DP 5 DUO 3/4" OT BW | 5" | 3/4" | 185 | 228 | 107 |
| RA1360706 | DP 5 DUO 1" OT BW | 5" | 1" | 185 | 228 | 107 |
| RA1361306 | DP 7 DUO 1/2" OT BW | 7" | 1/2" | 233 | 228 | 107 |
| RA1361406 | DP 7 DUO 3/4" OT BW | 7" | 3/4" | 233 | 228 | 107 |
| RA1361706 | DP 7 DUO 1" OT BW | 7" | 1" | 233 | 228 | 107 |
| RA1390306 | DP 10 DUO 1/2" OT BW | 10" | 1/2" | 325 | 228 | 107 |
| RA1390406 | DP 10 DUO 3/4" OT BW | 10" | 3/4" | 325 | 228 | 107 |
| RA1390706 | DP 10 DUO 1" OT BW | 10" | 1" | 325 | 228 | 107 |
| RA1391306 | DP 20 DUO 1/2" OT BW | 20" | 1/2" | 577 | 228 | 107 |
| RA1391406 | DP 20 DUO 3/4" OT BW | 20" | 3/4" | 577 | 228 | 107 |
| RA1391706 | DP 20 DUO 1" OT BW | 20" | 1" | 577 | 228 | 107 |

HOUSINGS WITH PLASTIC BSP THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|----------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA1360106 | DP 5 DUO 1/4" IN BW | 5" | 1/4" | 185 | 228 | 107 |
| RA1360316 | DP 5 DUO 1/2" IN BW | 5" | 1/2" | 185 | 228 | 107 |
| RA1360416 | DP 5 DUO 3/4" IN BW | 5" | 3/4" | 185 | 228 | 107 |
| RA1360716 | DP 5 DUO 1" IN BW | 5" | 1" | 185 | 228 | 107 |
| RA1361116 | DP 7 DUO 1/4" IN BW | 7" | 1/4" | 233 | 228 | 107 |
| RA1361316 | DP 7 DUO 1/2" IN BW | 7" | 1/2" | 233 | 228 | 107 |
| RA1361416 | DP 7 DUO 3/4" IN BW | 7" | 3/4" | 233 | 228 | 107 |
| RA1361716 | DP 7 DUO 1" IN BW | 7" | 1" | 233 | 228 | 107 |
| RA1390106 | DP 10 DUO 1/4" IN BW | 10" | 1/4" | 325 | 228 | 107 |
| RA1390316 | DP 10 DUO 1/2" IN BW | 10" | 1/2" | 325 | 228 | 107 |
| RA1390416 | DP 10 DUO 3/4" IN BW | 10" | 3/4" | 325 | 228 | 107 |
| RA1390716 | DP 10 DUO 1" IN BW | 10" | 1" | 325 | 228 | 107 |
| RA1391316 | DP 20 DUO 1/2" IN BW | 20" | 1/2" | 577 | 228 | 107 |
| RA1391416 | DP 20 DUO 3/4" IN BW | 20" | 3/4" | 577 | 228 | 107 |
| RA1391716 | DP 20 DUO 1" IN BW | 20" | 1" | 577 | 228 | 107 |

HOUSINGS WITH PLASTIC NPT THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|--------------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA1360126 | DP 5 DUO 1/4" NPT IN BW | 5" | 1/4" | 185 | 228 | 107 |
| RA1360426 | DP 5 DUO 3/4" NPT IN BW | 5" | 3/4" | 185 | 228 | 107 |
| RA1360726 | DP 5 DUO 1" NPT IN BW | 5" | 1" | 185 | 228 | 107 |
| RA1361126 | DP 7 DUO 1/4" NPT IN BW | 7" | 1/4" | 233 | 228 | 107 |
| RA1361426 | DP 7 DUO 3/4" NPT IN BW | 7" | 3/4" | 233 | 228 | 107 |
| RA1361726 | DP 7 DUO 1" NPT IN BW | 7" | 1" | 233 | 228 | 107 |
| RA1390126 | DP 10 DUO 1/4" NPT IN BW | 10" | 1/4" | 325 | 228 | 107 |
| RA1390426 | DP 10 DUO 3/4" NPT IN BW | 10" | 3/4" | 325 | 228 | 107 |
| RA1390726 | DP 10 DUO 1" NPT IN BW | 10" | 1" | 325 | 228 | 107 |
| RA1391426 | DP 20 DUO 3/4" NPT IN BW | 20" | 3/4" | 577 | 228 | 107 |
| RA1391726 | DP 20 DUO 1" NPT IN BW | 20" | 1" | 577 | 228 | 107 |

VARIANTS AVAILABLE ON MINIMUM QUANTITY:

- RT housings suitable for filter cartridges with length 508 mm

Some items in the list are subject to minimum order quantities and/or to longer delivery term.




DP TRIO

WORKING CONDITIONS

Max working pressure:
 BSP versions _____ 8 bar (116 psi)
 NPT versions _____ 8,6 bar (125 psi)
 Max working temperature _____ 45°C (113°F)
 Min working temperature _____ 4°C (39,2°F)

SPECIFICATIONS

Non-toxic materials, suitable for drinking water.
 Head: reinforced polypropylene.
 Bowls: PET.
 O-rings: EPDM.
 Breather-valve: body stainless steel, o-ring EPDM.
 IN/OUT brass threads: CW 617 N brass.

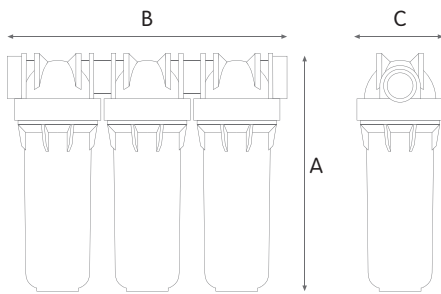

DP TRIO clear housings

HOUSINGS WITH BRASS BSP THREADS



| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|-----------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA1370301 | DP 5 TRIO 1/2" OT TS | 5" | 1/2" | 185 | 336 | 107 |
| RA1370401 | DP 5 TRIO 3/4" OT TS | 5" | 3/4" | 185 | 336 | 107 |
| RA1370701 | DP 5 TRIO 1" OT TS | 5" | 1" | 185 | 336 | 107 |
| RA1371301 | DP 7 TRIO 1/2" OT TS | 7" | 1/2" | 233 | 336 | 107 |
| RA1371401 | DP 7 TRIO 3/4" OT TS | 7" | 3/4" | 233 | 336 | 107 |
| RA1371701 | DP 7 TRIO 1" OT TS | 7" | 1" | 233 | 336 | 107 |
| RA1400301 | DP 10 TRIO 1/2" OT TS | 10" | 1/2" | 325 | 336 | 107 |
| RA1400401 | DP 10 TRIO 3/4" OT TS | 10" | 3/4" | 325 | 336 | 107 |
| RA1400701 | DP 10 TRIO 1" OT TS | 10" | 1" | 325 | 336 | 107 |
| RA1401301 | DP 20 TRIO 1/2" OT TS | 20" | 1/2" | 577 | 336 | 107 |
| RA1401401 | DP 20 TRIO 3/4" OT TS | 20" | 3/4" | 577 | 336 | 107 |
| RA1401701 | DP 20 TRIO 1" OT TS | 20" | 1" | 577 | 336 | 107 |

HOUSINGS WITH PLASTIC BSP THREADS



| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|-----------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA1370101 | DP 5 TRIO 1/4" IN TS | 5" | 1/4" | 185 | 336 | 107 |
| RA1370311 | DP 5 TRIO 1/2" IN TS | 5" | 1/2" | 185 | 336 | 107 |
| RA1370411 | DP 5 TRIO 3/4" IN TS | 5" | 3/4" | 185 | 336 | 107 |
| RA1370711 | DP 5 TRIO 1" IN TS | 5" | 1" | 185 | 336 | 107 |
| RA1371101 | DP 7 TRIO 1/4" IN TS | 7" | 1/4" | 233 | 336 | 107 |
| RA1371311 | DP 7 TRIO 1/2" IN TS | 7" | 1/2" | 233 | 336 | 107 |
| RA1371411 | DP 7 TRIO 3/4" IN TS | 7" | 3/4" | 233 | 336 | 107 |
| RA1371711 | DP 7 TRIO 1" IN TS | 7" | 1" | 233 | 336 | 107 |
| RA1400101 | DP 10 TRIO 1/4" IN TS | 10" | 1/4" | 325 | 336 | 107 |
| RA1400311 | DP 10 TRIO 1/2" IN TS | 10" | 1/2" | 325 | 336 | 107 |
| RA1400411 | DP 10 TRIO 3/4" IN TS | 10" | 3/4" | 325 | 336 | 107 |
| RA1400711 | DP 10 TRIO 1" IN TS | 10" | 1" | 325 | 336 | 107 |
| RA1401311 | DP 20 TRIO 1/2" IN TS | 20" | 1/2" | 577 | 336 | 107 |
| RA1401411 | DP 20 TRIO 3/4" IN TS | 20" | 3/4" | 577 | 336 | 107 |
| RA1401711 | DP 20 TRIO 1" IN TS | 20" | 1" | 577 | 336 | 107 |


HOUSINGS WITH PLASTIC NPT THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|---------------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA1370121 | DP 5 TRIO 1/4" NPT IN TS | 5" | 1/4" | 185 | 336 | 107 |
| RA1370421 | DP 5 TRIO 3/4" NPT IN TS | 5" | 3/4" | 185 | 336 | 107 |
| RA1370721 | DP 5 TRIO 1" NPT IN TS | 5" | 1" | 185 | 336 | 107 |
| RA1371121 | DP 7 TRIO 1/4" NPT IN TS | 7" | 1/4" | 233 | 336 | 107 |
| RA1371421 | DP 7 TRIO 3/4" NPT IN TS | 7" | 3/4" | 233 | 336 | 107 |
| RA1371721 | DP 7 TRIO 1" NPT IN TS | 7" | 1" | 233 | 336 | 107 |
| RA1400121 | DP 10 TRIO 1/4" NPT IN TS | 10" | 1/4" | 325 | 336 | 107 |
| RA1400421 | DP 10 TRIO 3/4" NPT IN TS | 10" | 3/4" | 325 | 336 | 107 |
| RA1400721 | DP 10 TRIO 1" NPT IN TS | 10" | 1" | 325 | 336 | 107 |
| RA1401421 | DP 20 TRIO 3/4" NPT IN TS | 20" | 3/4" | 577 | 336 | 107 |
| RA1401721 | DP 20 TRIO 1" NPT IN TS | 20" | 1" | 577 | 336 | 107 |

VARIANTS AVAILABLE ON MINIMUM QUANTITY:

- RT housings suitable for filter cartridges with length 508 mm

Some items in the list are subject to minimum order quantities and/or to longer delivery term.

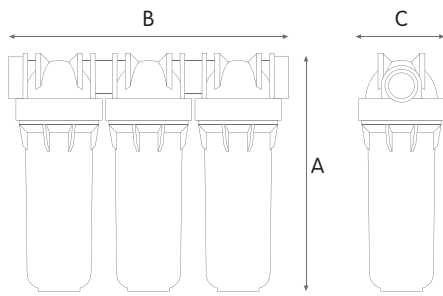

WORKING CONDITIONS

Max working pressure:
 BSP versions _____ 8 bar (116 psi)
 NPT versions _____ 8,6 bar (125 psi)
 Max working temperature _____ 45°C (113°F)
 Min working temperature _____ 4°C (39,2°F)

SPECIFICATIONS

Non-toxic materials, suitable for drinking water.
 Head: reinforced polypropylene.
 Bowls: PET.
 O-rings: EPDM.
 Breather-valve: body stainless steel, o-ring EPDM.
 IN/OUT brass threads: CW 617 N brass.

DP TRIO blue housings

HOUSINGS WITH BRASS BSP THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|-----------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA1370302 | DP 5 TRIO 1/2" OT AB | 5" | 1/2" | 185 | 336 | 107 |
| RA1370402 | DP 5 TRIO 3/4" OT AB | 5" | 3/4" | 185 | 336 | 107 |
| RA1370702 | DP 5 TRIO 1" OT AB | 5" | 1" | 185 | 336 | 107 |
| RA1371302 | DP 7 TRIO 1/2" OT AB | 7" | 1/2" | 233 | 336 | 107 |
| RA1371402 | DP 7 TRIO 3/4" OT AB | 7" | 3/4" | 233 | 336 | 107 |
| RA1371702 | DP 7 TRIO 1" OT AB | 7" | 1" | 233 | 336 | 107 |
| RA1400302 | DP 10 TRIO 1/2" OT AB | 10" | 1/2" | 325 | 336 | 107 |
| RA1400402 | DP 10 TRIO 3/4" OT AB | 10" | 3/4" | 325 | 336 | 107 |
| RA1400702 | DP 10 TRIO 1" OT AB | 10" | 1" | 325 | 336 | 107 |
| RA1401302 | DP 20 TRIO 1/2" OT AB | 20" | 1/2" | 577 | 336 | 107 |
| RA1401402 | DP 20 TRIO 3/4" OT AB | 20" | 3/4" | 577 | 336 | 107 |
| RA1401702 | DP 20 TRIO 1" OT AB | 20" | 1" | 577 | 336 | 107 |

HOUSINGS WITH PLASTIC BSP THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|-----------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA1370102 | DP 5 TRIO 1/4" IN AB | 5" | 1/4" | 185 | 336 | 107 |
| RA1370312 | DP 5 TRIO 1/2" IN AB | 5" | 1/2" | 185 | 336 | 107 |
| RA1370412 | DP 5 TRIO 3/4" IN AB | 5" | 3/4" | 185 | 336 | 107 |
| RA1370712 | DP 5 TRIO 1" IN AB | 5" | 1" | 185 | 336 | 107 |
| RA1371102 | DP 7 TRIO 1/4" IN AB | 7" | 1/4" | 233 | 336 | 107 |
| RA1371312 | DP 7 TRIO 1/2" IN AB | 7" | 1/2" | 233 | 336 | 107 |
| RA1371412 | DP 7 TRIO 3/4" IN AB | 7" | 3/4" | 233 | 336 | 107 |
| RA1371712 | DP 7 TRIO 1" IN AB | 7" | 1" | 233 | 336 | 107 |
| RA1400102 | DP 10 TRIO 1/4" IN AB | 10" | 1/4" | 325 | 336 | 107 |
| RA1400312 | DP 10 TRIO 1/2" IN AB | 10" | 1/2" | 325 | 336 | 107 |
| RA1400412 | DP 10 TRIO 3/4" IN AB | 10" | 3/4" | 325 | 336 | 107 |
| RA1400712 | DP 10 TRIO 1" IN AB | 10" | 1" | 325 | 336 | 107 |
| RA1401312 | DP 20 TRIO 1/2" IN AB | 20" | 1/2" | 577 | 336 | 107 |
| RA1401412 | DP 20 TRIO 3/4" IN AB | 20" | 3/4" | 577 | 336 | 107 |
| RA1401712 | DP 20 TRIO 1" IN AB | 20" | 1" | 577 | 336 | 107 |


HOUSINGS WITH PLASTIC NPT THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|---------------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA1370122 | DP 5 TRIO 1/4" NPT IN AB | 5" | 1/4" | 185 | 336 | 107 |
| RA1370322 | DP 5 TRIO 3/4" NPT IN AB | 5" | 3/4" | 185 | 336 | 107 |
| RA1370722 | DP 5 TRIO 1" NPT IN AB | 5" | 1" | 185 | 336 | 107 |
| RA1371122 | DP 7 TRIO 1/4" NPT IN AB | 7" | 1/4" | 233 | 336 | 107 |
| RA1371422 | DP 7 TRIO 3/4" NPT IN AB | 7" | 3/4" | 233 | 336 | 107 |
| RA1371722 | DP 7 TRIO 1" NPT IN AB | 7" | 1" | 233 | 336 | 107 |
| RA1400122 | DP 10 TRIO 1/4" NPT IN AB | 10" | 1/4" | 325 | 336 | 107 |
| RA1400422 | DP 10 TRIO 3/4" NPT IN AB | 10" | 3/4" | 325 | 336 | 107 |
| RA1400722 | DP 10 TRIO 1" NPT IN AB | 10" | 1" | 325 | 336 | 107 |
| RA1401422 | DP 20 TRIO 3/4" NPT IN AB | 20" | 3/4" | 577 | 336 | 107 |
| RA1401722 | DP 20 TRIO 1" NPT IN AB | 20" | 1" | 577 | 336 | 107 |

VARIANTS AVAILABLE ON MINIMUM QUANTITY:

- RT housings suitable for filter cartridges with length 508 mm

Some items in the list are subject to minimum order quantities and/or to longer delivery term.

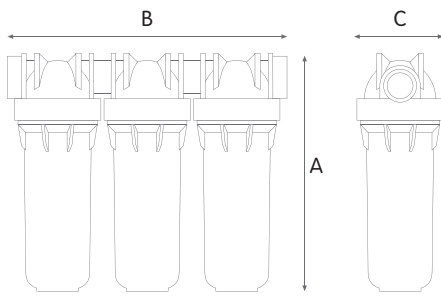

WORKING CONDITIONS

Max working pressure:
 BSP versions _____ 8 bar (116 psi)
 NPT versions _____ 8,6 bar (125 psi)
 Max working temperature _____ 45°C (113°F)
 Min working temperature _____ 4°C (39,2°F)

SPECIFICATIONS

Non-toxic materials, suitable for drinking water.
 Head: reinforced polypropylene.
 Bowls: PET.
 O-rings: EPDM.
 Breather-valve: body stainless steel, o-ring EPDM.
 IN/OUT brass threads: CW 617 N brass.

DP TRIO white housings

HOUSINGS WITH BRASS BSP THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|-----------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA1370306 | DP 5 TRIO 1/2" OT BW | 5" | 1/2" | 185 | 336 | 107 |
| RA1370406 | DP 5 TRIO 3/4" OT BW | 5" | 3/4" | 185 | 336 | 107 |
| RA1370706 | DP 5 TRIO 1" OT BW | 5" | 1" | 185 | 336 | 107 |
| RA1371306 | DP 7 TRIO 1/2" OT BW | 7" | 1/2" | 233 | 336 | 107 |
| RA1371406 | DP 7 TRIO 3/4" OT BW | 7" | 3/4" | 233 | 336 | 107 |
| RA1371706 | DP 7 TRIO 1" OT BW | 7" | 1" | 233 | 336 | 107 |
| RA1400306 | DP 10 TRIO 1/2" OT BW | 10" | 1/2" | 325 | 336 | 107 |
| RA1400406 | DP 10 TRIO 3/4" OT BW | 10" | 3/4" | 325 | 336 | 107 |
| RA1400706 | DP 10 TRIO 1" OT BW | 10" | 1" | 325 | 336 | 107 |
| RA1401306 | DP 20 TRIO 1/2" OT BW | 20" | 1/2" | 577 | 336 | 107 |
| RA1401406 | DP 20 TRIO 3/4" OT BW | 20" | 3/4" | 577 | 336 | 107 |
| RA1401706 | DP 20 TRIO 1" OT BW | 20" | 1" | 577 | 336 | 107 |

HOUSINGS WITH PLASTIC BSP THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|-----------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA1370106 | DP 5 TRIO 1/4" IN BW | 5" | 1/4" | 185 | 336 | 107 |
| RA1370316 | DP 5 TRIO 1/2" IN BW | 5" | 1/2" | 185 | 336 | 107 |
| RA1370416 | DP 5 TRIO 3/4" IN BW | 5" | 3/4" | 185 | 336 | 107 |
| RA1370716 | DP 5 TRIO 1" IN BW | 5" | 1" | 185 | 336 | 107 |
| RA1371106 | DP 7 TRIO 1/4" IN BW | 7" | 1/4" | 233 | 336 | 107 |
| RA1371316 | DP 7 TRIO 1/2" IN BW | 7" | 1/2" | 233 | 336 | 107 |
| RA1371416 | DP 7 TRIO 3/4" IN BW | 7" | 3/4" | 233 | 336 | 107 |
| RA1371716 | DP 7 TRIO 1" IN BW | 7" | 1" | 233 | 336 | 107 |
| RA1400106 | DP 10 TRIO 1/4" IN BW | 10" | 1/4" | 325 | 336 | 107 |
| RA1400316 | DP 10 TRIO 1/2" IN BW | 10" | 1/2" | 325 | 336 | 107 |
| RA1400416 | DP 10 TRIO 3/4" IN BW | 10" | 3/4" | 325 | 336 | 107 |
| RA1400716 | DP 10 TRIO 1" IN BW | 10" | 1" | 325 | 336 | 107 |
| RA1401316 | DP 20 TRIO 1/2" IN BW | 20" | 1/2" | 577 | 336 | 107 |
| RA1401416 | DP 20 TRIO 3/4" IN BW | 20" | 3/4" | 577 | 336 | 107 |
| RA1401716 | DP 20 TRIO 1" IN BW | 20" | 1" | 577 | 336 | 107 |

HOUSINGS WITH PLASTIC NPT THREADS

| CODE | MODEL | SUITABLE CARTRIDGE | IN/OUT | DIMENSIONS mm | | |
|-----------|---------------------------|--------------------|--------|---------------|-----|-----|
| | | | | A | B | C |
| RA1370126 | DP 5 TRIO 1/4" NPT IN BW | 5" | 1/4" | 185 | 336 | 107 |
| RA1370426 | DP 5 TRIO 3/4" NPT IN BW | 5" | 3/4" | 185 | 336 | 107 |
| RA1370726 | DP 5 TRIO 1" NPT IN BW | 5" | 1" | 185 | 336 | 107 |
| RA1371126 | DP 7 TRIO 1/4" NPT IN BW | 7" | 1/4" | 233 | 336 | 107 |
| RA1371426 | DP 7 TRIO 3/4" NPT IN BW | 7" | 3/4" | 233 | 336 | 107 |
| RA1371726 | DP 7 TRIO 1" NPT IN BW | 7" | 1" | 233 | 336 | 107 |
| RA1400126 | DP 10 TRIO 1/4" NPT IN BW | 10" | 1/4" | 325 | 336 | 107 |
| RA1400426 | DP 10 TRIO 3/4" NPT IN BW | 10" | 3/4" | 325 | 336 | 107 |
| RA1400726 | DP 10 TRIO 1" NPT IN BW | 10" | 1" | 325 | 336 | 107 |
| RA1401426 | DP 20 TRIO 3/4" NPT IN BW | 20" | 3/4" | 577 | 336 | 107 |
| RA1401726 | DP 20 TRIO 1" NPT IN BW | 20" | 1" | 577 | 336 | 107 |

VARIANTS AVAILABLE ON MINIMUM QUANTITY:

- RT housings suitable for filter cartridges with length 508 mm

Some items in the list are subject to minimum order quantities and/or to longer delivery term.