

EASTON

EAXS34

Easton Classic Exposed Thermostatic System with 8" Shower Rose with Black Porcelain Lever Handle



FILEDESCRIPTION

TECHNICAL DETAILS

ADA Compliance: Yes
 Adjustable versus Fixed Spray: Fixed Spray
 Diameter of Head: 8"
 Fittings Hole Diameter: 1 3/8"
 Flow Restriction Options: 2.5, 2.0, 1.75, 1.5, 0.92
 Handshower / Spray Hose Length: 59"
 Index Color / Finish and Material: Metal
 Inlet Connection Size: 3/4"
 Inlet Connection Type: Copper Compression
 Inlet Supply Spread Maximum: 8 3/16"
 Inlet Supply Spread Minimum: 8 1/16"
 Installation Type: Wall Mounted
 Integrated Diverter: N
 Primary Material: Brass
 Suggested Application: Bath
 Valve Material: Brass
 Water Pressure Maximum: 75.0 psi
 Water Pressure Minimum: 20.0 psi
 Water Pressure Recommended: 45.0 psi

INSPIRATION

Drawing on Edwardian style, Easton is the most extensive Waterworks family; a range of moods and a selection of products from fittings to furniture.

CODES & STANDARDS

Code # EAXS34X: Certified with cUPC, NSF, IAPMO, CSA

PRODUCT FEATURES

Built in Anti-scald protection.
 Optional handle materials include porcelain and semi-precious stones.
 The pillowed propeller on the cross handle makes the product fit comfortably in the hand.
 Add a handshower to this exposed system. Handshower not included.
 Stocked in 2.5gpm (9.5 L/min) and 1.75gpm (6.6 L/min). State of California requires 1.75gpm (6.6 L/min) to comply with their water conservation requirements. Other flow options are available to order, contact your sales associate

CERTIFICATIONS




PRODUCT (NOTES)

Valve Included, Handshower Sold Separately

EASTON

EAXS34


Easton Classic Exposed Thermostatic System with 8" Shower Rose with Black Porcelain Lever Handle

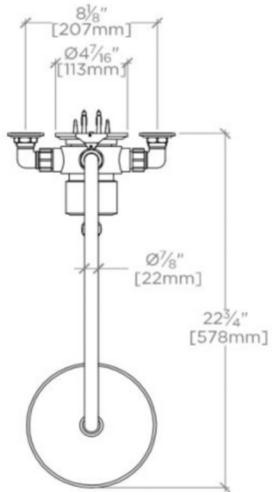

TOP VIEW SCALE: 1"=1'-0"



FRONT VIEW SCALE: 1"=1'-0"

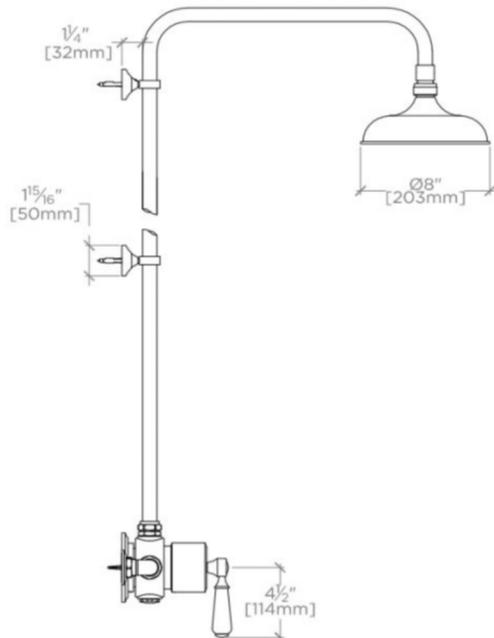

SIDE VIEW SCALE: 1"=1'-0"