# **KOHLER**<sub>®</sub>

## Features

- Bask<sup>®</sup> heated surface creates spa-like relaxation with soothing warmth on your back, shoulders, and neck.
- Three heat settings allow you to customize the surface temperature.
- 120 airjets release thousands of bubbles that surround, support, and massage the body.
- Variable-speed blower lets you adjust massage intensity to 18 levels.
- Hourglass shape adds style and elegance to your bathroom.
- Integral apron.
- Integral flange helps prevent water from seeping behind wall and simplifies alcove installation.
- Textured bottom surface.
- Immediate and manual purge cycles remove residual water from air channels after use.

#### Material

Acrylic.

#### Hydrotherapy

• BubbleMassage.

#### Installation

- Left drain.
- Alcove.

#### **Recommended Products/Accessories**

K-1446 Remote Installation Kit K-1491 Bath/Whirlpool Pillow K-1601 Bath/Whirlpool Footstop K-7166-AF Bath Drain K-24916 Wireless Music Kit K-37380 30" Rough-in Cable Bath Drain K-37383 Rough-in cable bath drain, PVC, 30" cable with tubing K-37386 rough-in cable drain, PVC, 30" cable K-23726 Drain treatment K-23732 Tub & shower cleaner K-7265 Clearflo Bath Drain K-7259 Clearflo Bath Drain



# **Codes/Standards**

ASME A112.19.7/CSA B45.10 CSA B45.5/IAPMO Z124 ASTM E162 ASTM E662 UL 1795

## KOHLER<sup>®</sup> Plastic Baths and Receptors Lifetime Limited Warranty KOHLER<sup>®</sup> Hydrotherapy Components Five-Year Limited Warranty

See website for detailed warranty information.

#### **Available Colors/Finishes**

Color tiles intended for reference only.

#### Color Code Description

0	White
47	Almond

G9 Sandbar




# **Mariposa®** 5' BubbleMassage<sup>™</sup> Bath

K-1239-GLAW



# Mariposa® 5' BubbleMassage™ Bath K-1239-GLAW

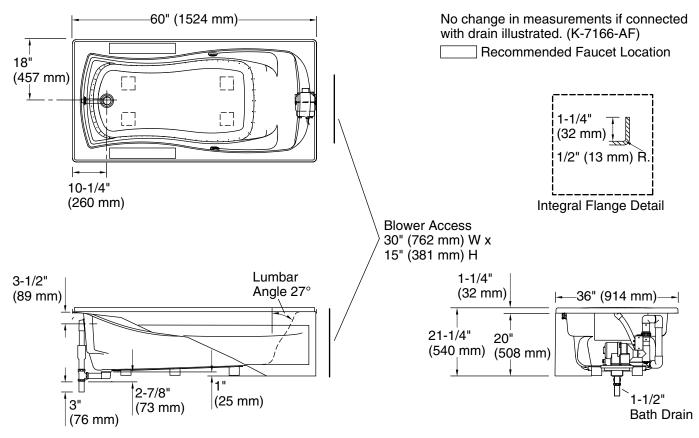

## **Required Electrical Service**

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

Blower, Heated Surface:

120 V, 15 A, 60 Hz

## **Technical Information**

All product dimensions are nominal.

Installation:	Three-wall alcove		
Drain location:	Left		
Basin area, bottom:	46" x 24" (1168 mm x 610 mm)		
Basin area, top:	54" x 27" (1372 mm x 686 mm)		
Weight:	115 lbs (52.2 kg)		
Minimum floor load:	44 lbs/ft² (214.8 kg/m²)		
Water depth:	14" (356 mm)		
Water capacity:	63 gal (238.5 L)		
Electrical component	Blower: 120 V, 10 A, 60 Hz		
rating:	Heated Surface: 120 V, 0.5 A, 60 Hz, 65		
	W		
Blower speed:	Variable		
Minimum flat for door:	2" (50 mm)		

#### Notes

Measure your actual product for rough-in details. Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Remote blower installation kit K-1446 is available for relocating the blower. Provide access for servicing the blower.

Do not relocate or alter the PVC tee or coiled flexible tubing connected to the blower. Follow the blower relocation instructions exactly.

If installing a rim-mount faucet, make sure there is no interference above or below the deck before drilling any holes.



# 1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications. For the most current Specification Sheet, go to <u>www.kohler.com</u>. 3-12-2020 07:53 - US/CA