

## Finial® Or Diverter Valve Trim

## Transfer Or Diverter Valve Trim K-T10304-4M

#### **Features**

- Includes face plate with handle.
- Single handle controls flow to outlets.
- Supplied with ADA compliant metal lever handle.
- When used with K-728 Series MasterShower diverter valves, handle controls flow to two or three outlets individually or any two outlets at a time.
- When used with K-737 Series MasterShower diverter valves, handle controls flow to two or three outlets individually or only one outlet at a time.
- Valve (not supplied) can be configured on site for two or three outlet operation.
- 360 degree handle rotation with three-outlet operation.
- 120 degree handle rotation with two-outlet operation.
- Complements the Finial® faucet and accessory collections.

#### Material

- Premium material construction with metal handle ensures reliability and durability.
- KOHLER finishes resist corrosion and tarnishing.

## Installation

- Trim set requires valve to complete installation (sold separately).
- Patented K-joint installation technology ensures consistent trim appearance, regardless of variability in valve rough-in.

### **Recommended Products/Accessories**

K-728-K 3/4" Two- or Three-Way Transfer Valve K-737-K 3/4" Two- or Three-Way Diverter Valve K-23723 Faucet cleaner



ADA	<b>CSA B651</b>	ОВС
ADA	COA DOO'I	UD

# Codes/Standards ASME A112.18.1/CSA B125.1 ADA ICC/ANSI A117.1 CSA B651

OBC

## **KOHLER® Faucet Lifetime Limited Warranty**

See website for detailed warranty information.

#### Available Colors/Finishes

Color tiles intended for reference only.


Color	Code	Description
	CP	Polished Chrome
	SN	Vibrant® Polished Nickel
	AF	Vibrant® French Gold
	PB	Vibrant® Polished Brass
	BN	Vibrant® Brushed Nickel
	BV	Vibrant® Brushed Bronze
	2BZ	Oil-Rubbed Bronze





## Finial® Transfer Or Diverter Valve Trim

## ransfer Or Diverter valve Trim **K-T10304-4M**

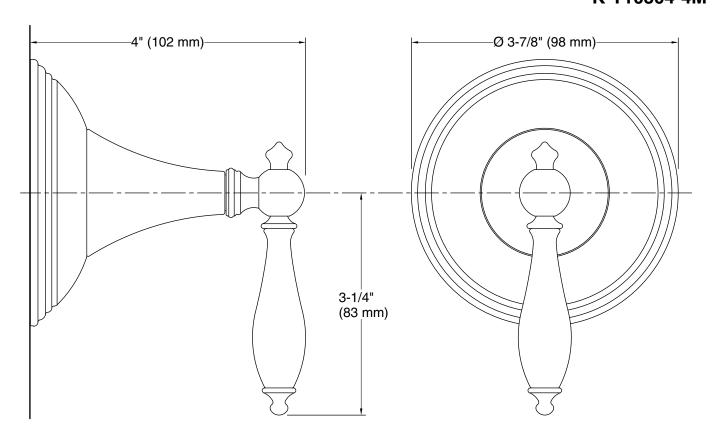

## **Technical Information**

All product dimensions are nominal.

#### **Notes**

Install this product according to the installation instructions.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

