

### Features

- Low-threshold design for easy entry and exit.
- Safeguard® slip-resistant surface on bath floor.
- Single threshold for three-wall installation.
- KOHLER® enameled cast iron.
- Center drain.
- Coordinates with other products in the Kathryn collection.

### Recommended Products/Accessories

K-1733 9 kW Steam Generator  
K-9132 Shower Drain  
K-702208-G54 Frameless Sliding Shower Door  
K-702208-G73 Frameless Sliding Shower Door  
K-702208-L Frameless Sliding Shower Door  
K-702209-L Frameless Sliding Shower Door  
K-705704-L Frameless Pivot Shower Door  
K-705710-L Frameless Pivot Shower Door  
K-705716-L Frameless Pivot Shower Door  
K-705722-L Frameless Pivot Shower Door  
K-705728-L Frameless Pivot Shower Door  
K-705740-L Frameless Pivot Shower Door  
K-705809-L Semi-Frameless Pivot Shower Door  
K-705822-L Semi-Frameless Pivot Shower Door  
K-705823-L Semi-Frameless Pivot Shower Door  
K-706008-D3 Frameless Sliding Shower Door  
K-706008-L Frameless Sliding Shower Door  
K-706010-L Frameless Sliding Shower Door  
K-706011-L Frameless Sliding Shower Door  
K-706014-D3 Frameless Sliding Shower Door  
K-706014-L Frameless Sliding Shower Door  
K-706016-L Frameless Sliding Shower Door  
K-706017-L Frameless Sliding Shower Door  
K-5526 7 kW Steam Generator  
K-5557 steam generator control kit  
K-23726 Drain treatment  
K-23725 Cast iron cleaner



### Codes/Standards









ASME A112.19.1/CSA B45.2  
ASTM F462


### KOHLER® Enameled Cast Iron Bath and Shower Base Lifetime Limited Warranty

See website for detailed warranty information.

### Available Colors/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
	0	White
	FF	Sea Salt™
	96	Biscuit
	FD	Cane Sugar™
	NY	Dune
	NG	Tea Green
	FT	Basalt
	7	Black Black™

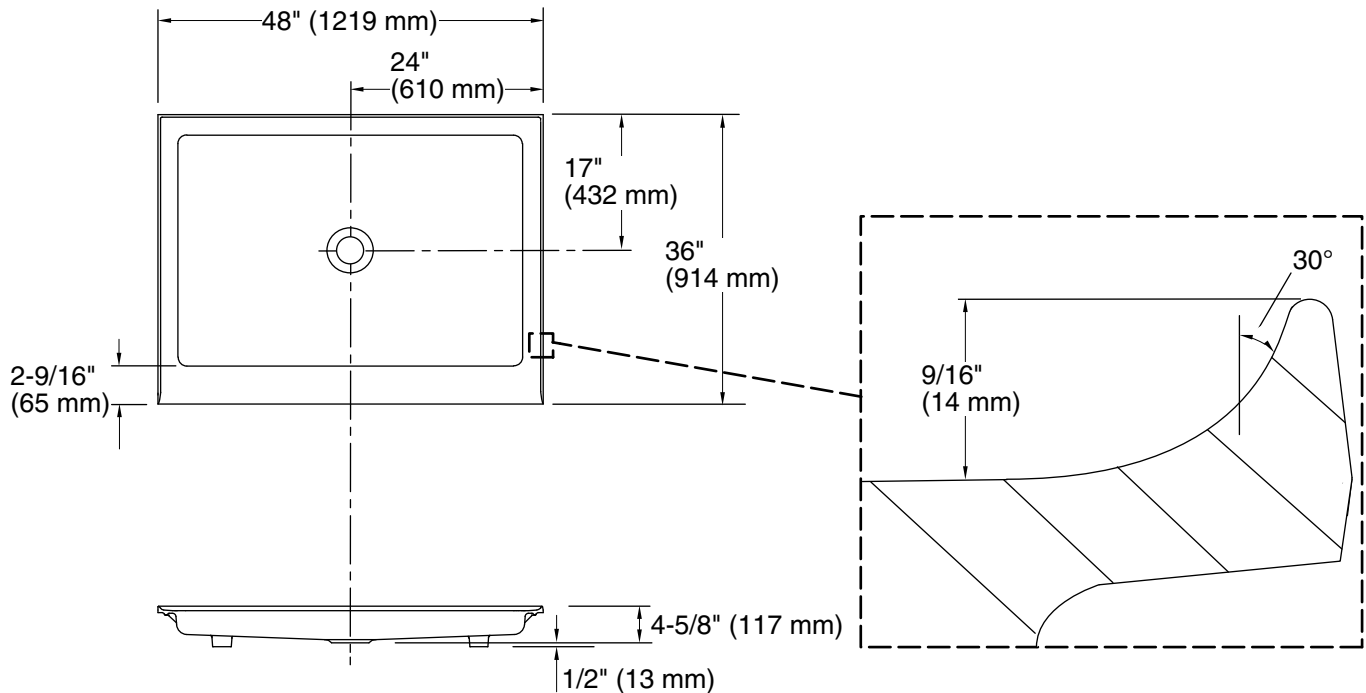

## Technical Information

All product dimensions are nominal.

Installation:	Drop-in
Drain location:	Center
Weight:	175 lbs (79.4 kg)
Minimum floor load:	20 lbs/ft <sup>2</sup> (97.6 kg/m <sup>2</sup> )

## Notes

Measure your actual product for rough-in details. Install this product according to the installation instructions.

The dimensions are applicable for this product only and should not be used to fabricate substitute bases for shower enclosures.

KOHLER steam generator/control kit is designed for use with this product. Kohler Co. shall not be responsible for problems encountered due to the installation and use of other manufacturer's steam generators.