

# Pitch<sup>™</sup> Rite-Temp<sup>®</sup> bath and shower trim set K-TLS97074-4

# Features

- Pressure-balancing diaphragm technology maintains outlet temperature within +/-3°F during water pressure fluctuations.
- Provides temperature regulation and automatic anti-scald protection.
- Single handle controls both on/off activation and temperature settings.
- Includes faceplate with ADA-compliant metal lever handle.
- Includes diverter bath spout with 1/2" slip-fit connection.
- For use with any KOHLER showerhead (sold separately).
- Includes shower arm and flange.
- Coordinates with Hint<sup>™</sup> bathroom sink faucets and bath faucets.

#### Material

- Premium material construction with metal handle ensures reliability and durability.
- KOHLER finishes resist corrosion and tarnishing.

## Installation

Trim only; requires valve to complete installation (sold separately).

## **Required Products/Accessories**

K-8304/K-P8304 Series Rite-Temp® Valve & Cartridge Kits or

K-8300/K-P8300 Series Rite-Temp® Valve Body Rough-ins K-8305/K-P8305 Series Rite-Temp® Cartridges

## **Recommended Products/Accessories**

K-23723 Faucet cleaner

## **Optional Products/Accessories**

K-10350 Deep Rough-In Kit For K-8305 Cartridges K-10351 Test Cap For K-8300 Series Valve Bodies 1307346 Retro mixer cap for K-304 Rite-Temp valve 1362395 Retro mixer cap for K-2971 HiFlow Rite-Temp valve



# Codes/Standards

ASME A112.18.1/CSA B125.1 California Energy Commission (CEC)

# KOHLER<sup>®</sup> Faucet Lifetime Limited Warranty

See website for detailed warranty information.

# **Available Colors/Finishes**

Color tiles intended for reference only.

## Color Code Description




- CP Polished Chrome
- BN Vibrant® Brushed Nickel





# Pitch<sup>™</sup> Rite-Temp<sup>®</sup> bath and shower trim set K-TLS97074-4

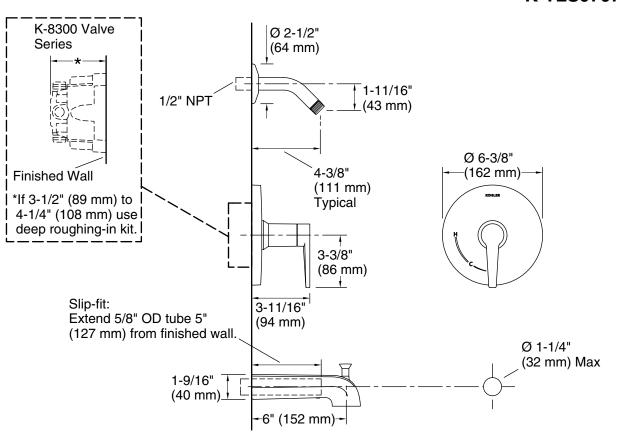

# **Technical Information**

All product dimensions are nominal. Drain included: No

## Notes

Install this product according to the installation instructions.

Install straight pipe or tube drop of 7" (178 mm) to 18" (457 mm) with single elbow between the valve and the wall-mount spout.

