



# Underscore® Cube

## Drop-In BubbleMassage™ Air Bath

### K-1969-GW

#### Features

- Bask® heated surface creates spa-like relaxation with soothing warmth on your back, shoulders, and neck.
- Three heat settings allow you to customize the surface temperature.
- 122 airjets release thousands of bubbles that surround, support, and massage the body.
- Variable-speed blower lets you adjust massage intensity to 18 levels.
- Zones of Control™ feature allows you to target massage to back, midsection, or feet.
- Electronic keypad.
- Remote control.
- Extra-deep square shape offers fully-immersed soaking experience with a compact footprint.
- Two integrated seats at different heights allow bathers to sit at their desired soaking depth.
- Requires K-8150 cable drain assembly and K-8134 cable drain trim kit (sold separately).

#### Material

- Acrylic.

#### Hydrotherapy

- BubbleMassage.

#### Installation

- Drop-in or undermount.

#### Recommended Products/Accessories

- K-8134 Cable Bath Drain Trim Kit
- K-8150 Cube Cable Drain
- K-24916 Wireless Music Kit
- K-578 Cube Undermount Installation Kit
- K-1177 Vinyl Tiling-in Bead
- K-23726 Drain treatment
- K-23732 Tub & shower cleaner




**DISCONTINUED** This product has been discontinued.

**DISCONTINUED** This product has been discontinued.

#### Codes/Standards

- ASME A112.19.7/CSA B45.10
- CSA B45.5/IAPMO Z124
- ASTM E162
- ASTM E662
- UL 1795
- CSA C22.2 No. 218.2

**KOHLER® Plastic Baths and Receptors**  
**Lifetime Limited Warranty**  
**KOHLER® Hydrotherapy Components**  
**Five-Year Limited Warranty**  
See website for detailed warranty information.

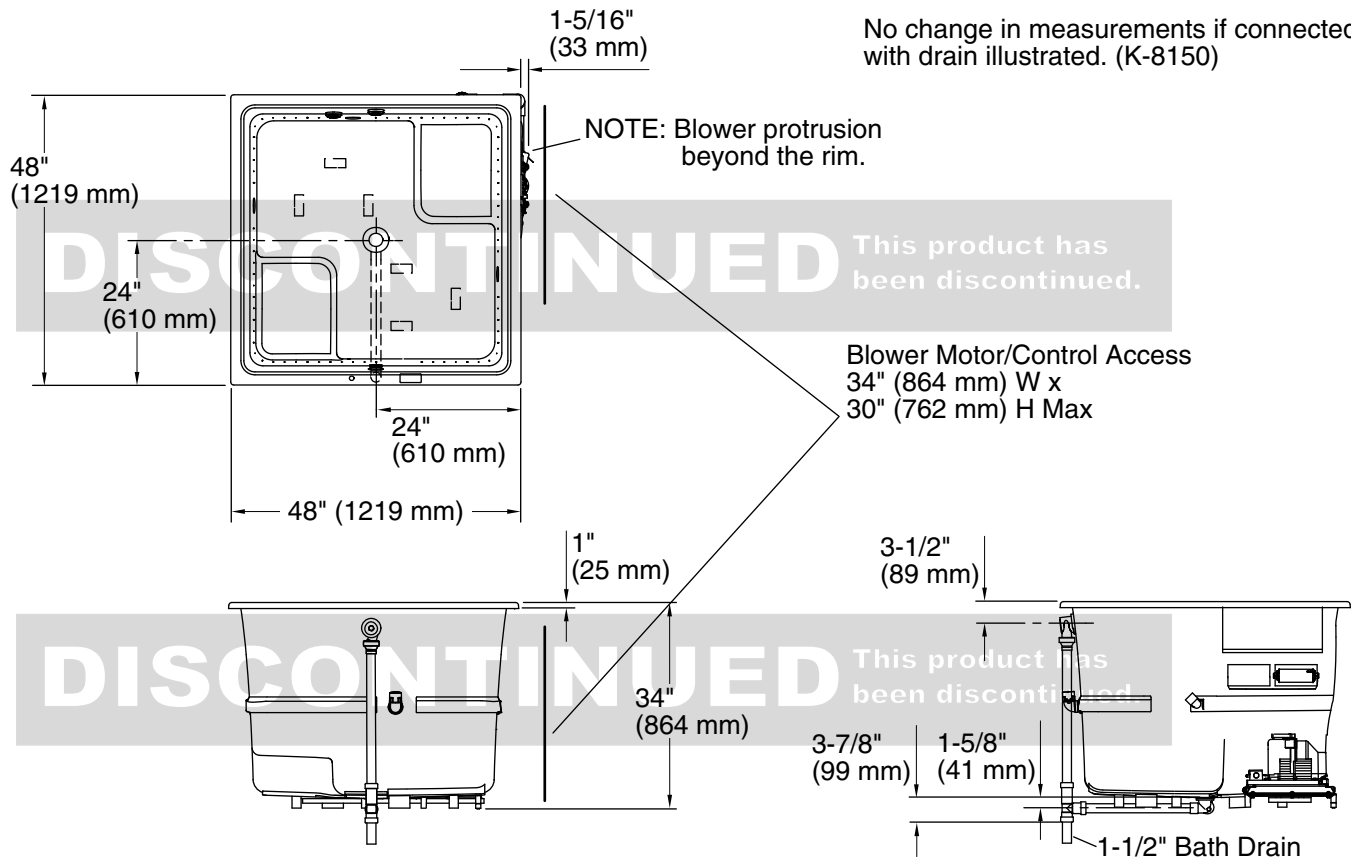

No change in measurements if connected with drain illustrated. (K-8150)

### Required Electrical Service

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

Blower, Heated 240 V, 15 A, 50/60 Hz  
Surface:

### Technical Information

All product dimensions are nominal.

Installation:	Drop-in, Under-mount
Drain location:	Center
Basin area, bottom:	39-3/8" x 39-3/8" (1000 mm x 1000 mm)
Basin area, top:	44-5/8" x 44-5/8" (1133 mm x 1133 mm)
Weight:	156 lbs (70.8 kg)
Minimum floor load:	105 lbs/ft <sup>2</sup> (512.7 kg/m <sup>2</sup> )
Water depth:	27-1/2" (699 mm)
Water capacity:	171 gal (647.3 L)
Template:	Under-mount, K-578, required, not included
Electrical component rating:	Blower: 240 V, 5 A, 50/60 Hz Heated Surface: 240 V, 0.5 A, 50/60 Hz, 65 W

### Notes

Measure your actual product for rough-in details. Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Kit is required for under-mount installations (sold separately).

If relocating the blower motor, do not relocate or alter the PVC tee or coiled flexible tubing connected to the blower. Follow the blower relocation instructions exactly. Provide access for servicing the blower.