KOHLER_®

Wellworth® Two-piece elongated 1.28 gpf toilet K-3998-UT

Features

- Two-piece toilet.
- Elongated bowl offers added room and comfort.
- 1.28 gpf (4.8 lpf).
- 2-1/8" (54 mm) fully-glazed trapway.
- Standard left-hand trip lever included.
- Insuliner[®] tank liner minimizes condensation on the tank when exposed to high humidity.
- Tank locks included.
- Combination consists of the K-4467-UT tank and the K-4198 bowl.
- Coordinates with other products in the Wellworth collection.

Technology

- Single-flush gravity uses the force of gravity and a precision-engineered tank, bowl, and trapway to create a strong siphon during flushing.
- KOHLERs canister flush valve harnesses the natural force of gravity and optimizes flushing performance.
- Class Five[®] flushing technology offers virtually plug-free performance and rinsing power for a clean bowl.

Installation

- Standard 12" (305 mm) rough-in.
- Three-bolt installation.
- Seat and supply line sold separately.

Recommended Products/Accessories

K-4636 Cachet® Quiet-Close™ Elongated Toilet Seat K-5588 Purefresh® Elongated Toilet Seat K-4108 C³®-230 Elongated cleansing toilet seat K-5420 Low-Profile Bolt Caps K-9379 Trip Lever 1023457 Wax Ring/Hardware Kit 1265114 Connector Hose K-23726 Drain treatment

Included Components

Product consists of: K-4198 Elongated Bowl K-4467-UT Toilet tank with Insuliner® tank liner and cover locks Additional Components: Bolt cap accessory pack Tank accessory pack Tank cover Trip lever





Codes/Standards

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992 EPA WaterSense®

KOHLER[®] Toilets and Seats Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color Code Description


0	White
96	Biscuit



Wellworth®



Two-piece elongated 1.28 gpf toilet K-3998-UT

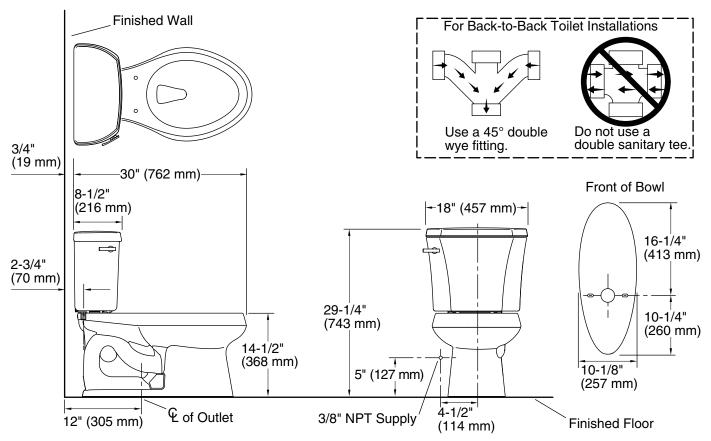

Technical Information

All product dimensions are nominal.			
Toilet type:	Two-piece, Floor-mount		
Waste Outlet:	Floor		
Bowl shape:	Elongated		
Flush type:	Class Five®		
Trap passageway:	2-1/8" (54 mm)		
Water Consumption			
Full:	1.28 gpf (4.8 lpf)		
Water surface size:	11-1/4" x 8-1/4" (286 mm x 210 mm)		
Rim to water surface:	5-1/4" (133 mm)		
Rough-in:	12" (305 mm)		
Seat-mounting holes:	5-1/2" (140 mm)		

Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

