




see what Delta can do™

# RAINCAN SHOWER HEAD

- Touch-Clean® Nozzles
- Single-Setting Raincan Shower Head

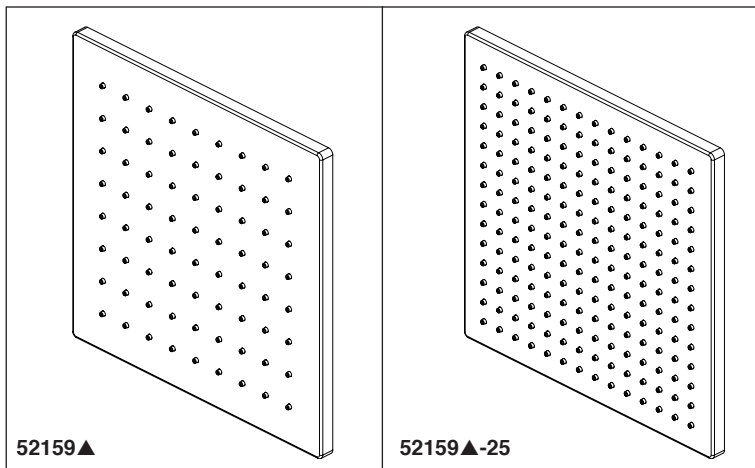

Submitted Model No.: \_\_\_\_\_



Specific Features: \_\_\_\_\_

### STANDARD SPECIFICATIONS:

- Maximum 1.75 gpm @ 80 psi, 6.6 L/min @ 550 kPa (52159▲)
- Maximum 2.5 gpm @ 80 psi, 9.5 L/min @ 550 kPa (52159▲-25)
- Metal ball connector for durability
- Ball connector swivel angle is 36° (18 per side)
- Standard 1/2"-14 NPT pipe fitting

### WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes; or, for commercial users, for 5 years from the date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.

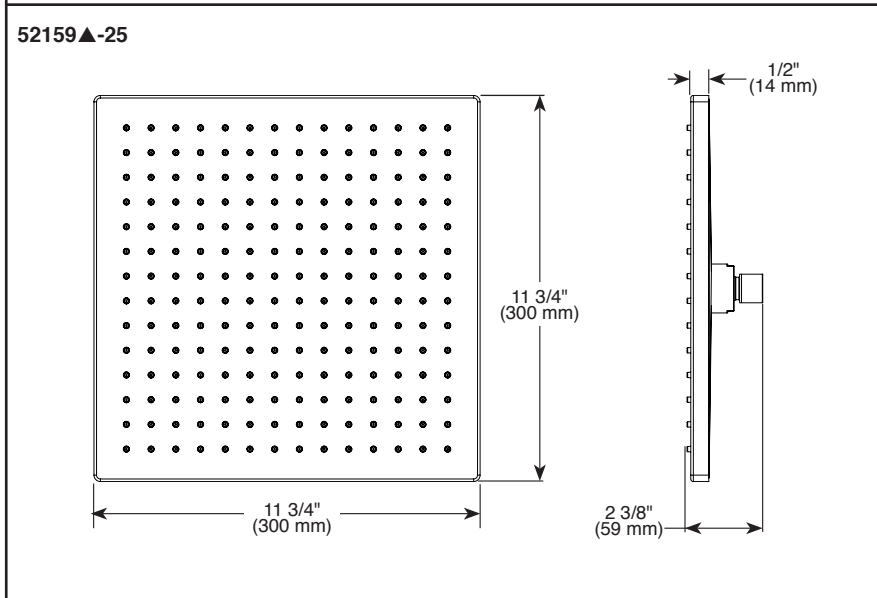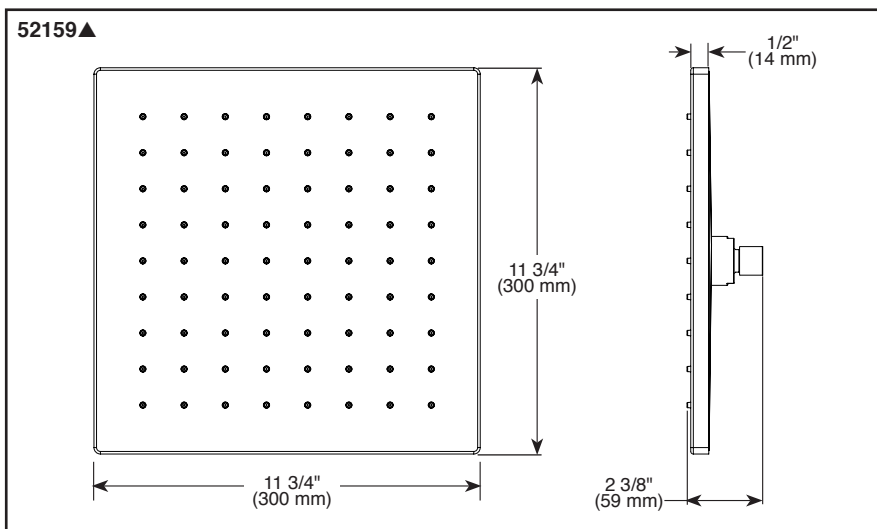

### COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- EPA WaterSense® (52159▲ only)

### Spray Pattern



Soft Rain  
Spray

▲ Designate proper finish suffix

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or [www.deltafaucet.com](http://www.deltafaucet.com) for finish options and product availability.

DSP-B-52159 Rev. A

### Delta Faucet Company

55 E. 111th Street, Indianapolis, Indiana 46280  
350 South Edgeware Road, St. Thomas, Ontario Canada N5P 4L1  
© 2018 Delta Faucet Company