

OPUS

Opus 5 1/2" Shower Head, Arm and Flange

OPSH71



SHOWN IN OPUS 5 1/2" SHOWER HEAD, ARM AND FLANGE | OPSH71

TECHNICAL DETAILS

Adjustable versus Fixed Spray: Fixed Spray
Diameter of Head: 5 1/2"
Escutcheon Primary Material: Brass
Fittings Hole Diameter: 1 3/8"
Flow Restriction Options: 2.5, 2.0, 1.75, 1.5
Depth / Width: 12"
Height: 6 1/2"
Inlet Connection Size: 1/2"
Inlet Connection Type: Male NPT
Integrated Diverter: N
Length: 6"
Pivot: N
Primary Material: Brass
Suggested Application: Bath
Water Pressure Maximum: 85.0 psi
Water Pressure Minimum: 25.0 psi
Water Pressure Recommended: 45.0 psi

INSPIRATION

Opus incorporates a range of sophisticated aesthetic notes, with graceful curves that create a jewel-like refinement.

CODES & STANDARDS

Code # OPSH71: ASME A112.18.1, CSA B125, IAPMO, State of MA, CEC

PRODUCT FEATURES

Brass material is used for trim and valve component parts.

The manufacturing process encompasses casting, turning, stamping, hand-fitting and hand polishing.

An extensive range of fittings, fixture and accessory options for the lavatory, shower, bathtub.


Stocked in 2.5gpm (9.5 L/min) and 1.75gpm (6.6 L/min). State of California requires 1.75gpm (6.6 L/min) to comply with their water conservation requirements. Other flow options are available to order, contact your sales associate or call 1 (800) 899-6757 for details.




OPUS

OPSH71


Opus 5 1/2" Shower Head, Arm and Flange

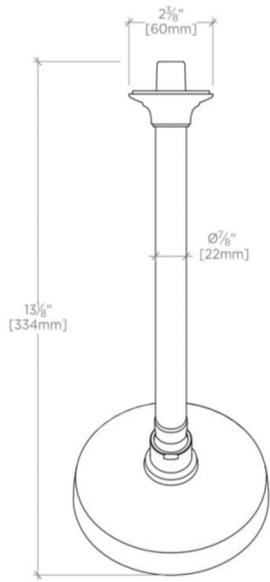


TOP VIEW SCALE: 3"=1'-0"

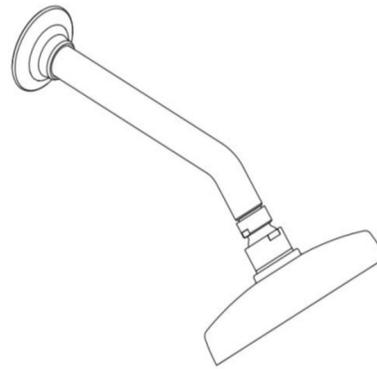

SIDE VIEW SCALE: 3"=1'-0"

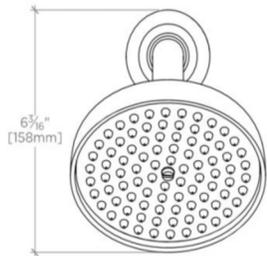

FRONT VIEW SCALE: 3"=1'-0"

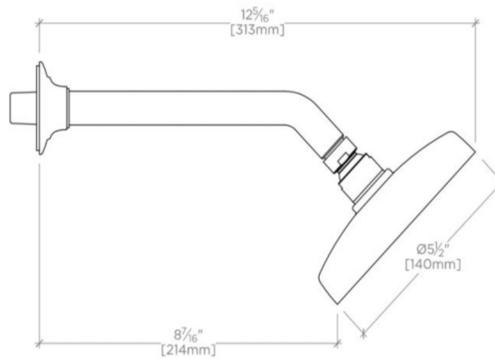

SIDE VIEW SCALE: 3"=1'-0"