

Features

- 60"L x 34-1/4"W x 14"H.
- Our most popular bath.
- Integral apron for quick installation.
- Constructed KOHLER® Cast Iron.
- Designed for one-person bathing.

Recommended Products/Accessories

K-1491 Bath/Whirlpool Pillow K-1601 Bath/Whirlpool Footstop K-7160-TF Bath Drain K-7213 27" Cable Bath Drain K-7214 27" Cable Bath Drain K-702200-G54 Frameless Sliding Bath Door K-702200-G73 Frameless Sliding Bath Door K-702200-L Frameless Sliding Bath Door K-702205-L Frameless Sliding Bath Door K-706000-D3 Frameless Sliding Bath Door K-706000-L Frameless Sliding Bath Door K-706003-L Frameless Sliding Bath Door K-706004-D3 Frameless Sliding Bath Door K-706004-L Frameless Sliding Bath Door K-706007-L Frameless Sliding Bath Door K-23726 Drain treatment K-23725 Cast iron cleaner



ADA

Codes/Standards ASME A112.19.1/CSA B45.2 ASTM F462 ADA ICC/ANSI A117.1

KOHLER[®] Enameled Cast Iron Bath and Shower Base Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.


Color Code Description 0 White 96 Biscuit 47 Almond



Villager® 60" alcove bath K-714



Villager® 60" alcove bath K-714

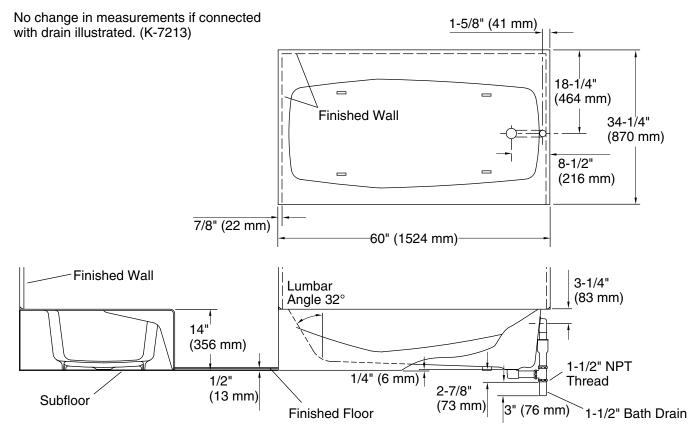

Technical Information

All product dimensions are nominal.

Installation:	Three-wall alcove
Drain location:	Right
Basin area, bottom:	45" x 22" (1143 mm x 559 mm)
Basin area, top:	55" x 24" (1397 mm x 610 mm)
Weight:	330 lbs (149.7 kg)
Minimum floor load:	51 lbs/ft² (249 kg/m²)
Water depth:	8-5/8" (219 mm)
Water capacity:	33 gal (124.9 L)
Minimum flat for door:	2-7/16" (62 mm)

Notes

Measure your actual product for rough-in details. Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

ADA compliant when installed to the specific requirements of these regulations.

