

### Features

- With innovative Flipstream® technology, the Flipside® handshower dedicates a single sprayhead surface to each of four unique sprays.
- Changing sprays is as easy as turning the head on its axis.
- Ergonomic design is easy to use, even with soapy hands.
- Komotion™ spray delivers a soothing, circular water pattern.
- Kotton™ spray releases a dense, luxurious downpour of water.
- Koverage™ spray delivers full-coverage spray for everyday showering.
- Kurrent™ spray offers a targeted massage to ease away aches and pains.
- 1.75 gpm (6.6 lpm) flow rate.

### Material

- KOHLER finishes resist corrosion and tarnishing.

### Installation

- Bracket or slidebar required for wall-mount installation.
- Deck-mount holder required for deck-mount installation.

### Water Conservation & Rebates

- This product can help a building earn Water Efficiency points in LEED® Green Building Rating System.

### Required Products/Accessories

K-8593 72" Shower Hose

or

K-9514 60" Shower Hose

### Recommended Products/Accessories

K-23723 Faucet cleaner



OBC

### Codes/Standards

ASME A112.18.1/CSA B125.1

DOE - Energy Policy Act 1992

EPA WaterSense®

California Energy Commission (CEC)

OBC

### KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

### Available Colors/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
-------	------	-------------



CP Polished Chrome




SN Vibrant® Polished Nickel



BN Vibrant® Brushed Nickel



2BZ Oil-Rubbed Bronze

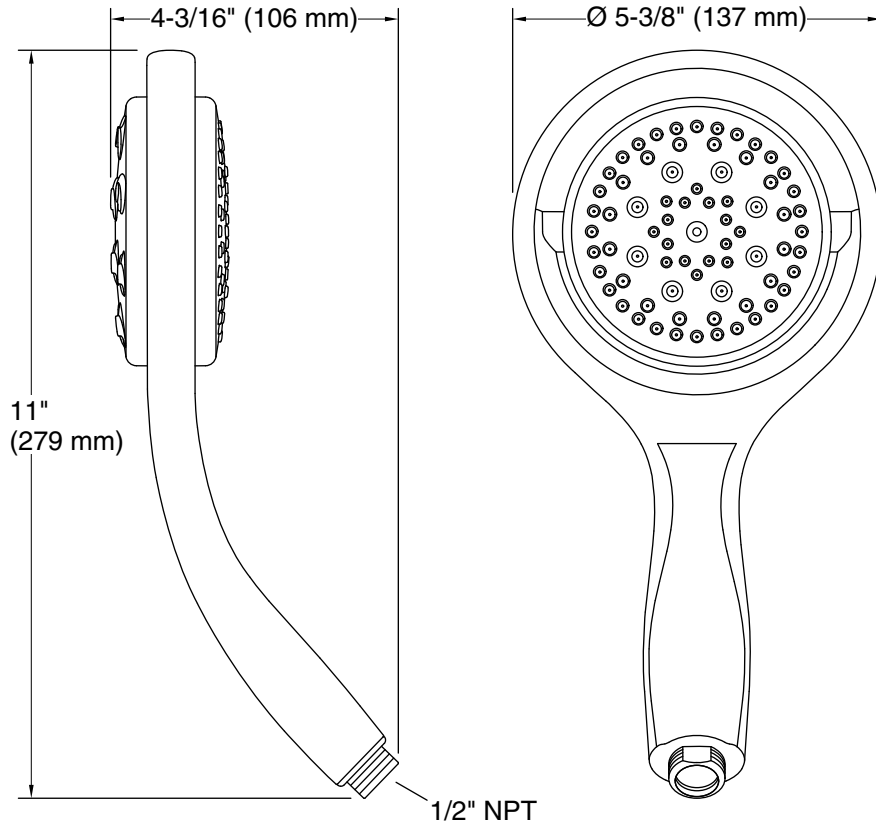

### Technical Information

All product dimensions are nominal.

#### Faucet:

Flow rate: 1.75 gal/min (6.6 l/min)

Pressure: 45 psi (3.1 bar)

Drain included: No

#### Handshower:

Rated maximum flow: 1.75 gal/min (6.6 l/min)

Pressure: 45 psi (3.1 bar)

### Notes

Install this product according to the installation instructions.

Plumbing codes require approved backflow prevention devices to be installed in-line to handshowers. Please consult with local plumbing officials.

OBC compliant when installed to the specific requirements of these regulations.