

# Underscore® Rectangle

5' Bath K-1121-L

#### Features

- Molded lumbar support offers extra comfort while bathing.
- Slotted overflow allows for deep soaking.
- Integral flange helps prevent water from seeping behind wall and simplifies alcove installation.

#### Material

- Acrylic.
- Acrylic.

#### Installation

- Requires K-7271 or K-7272 Clearflo slotted overflow bath drain (sold separately).
- Left drain.
- Alcove.

#### **Required Products/Accessories**

K-7271 Brass Slotted Overflow Bath Drain or

K-7272 PVC Slotted Overflow Bath Drain

#### **Recommended Products/Accessories**

K-1491 Bath/Whirlpool Pillow K-1601 Bath/Whirlpool Footstop K-24916 Wireless Music Kit K-23726 Drain treatment K-23732 Tub & shower cleaner



ADA

#### Codes/Standards

CSA B45.5/IAPMO Z124 ASTM E162 ASTM E662 ADA ICC/ANSI A117.1

#### KOHLER<sup>®</sup> Plastic Baths and Receptors Lifetime Limited Warranty

See website for detailed warranty information.

## **Available Colors/Finishes**

Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	95	lce™ Grey
	G9	Sandbar
	K4	Cashmere
	58	Thunder™ Grey


7 Black Black™





# **Underscore® Rectangle**

5' Bath K-1121-L

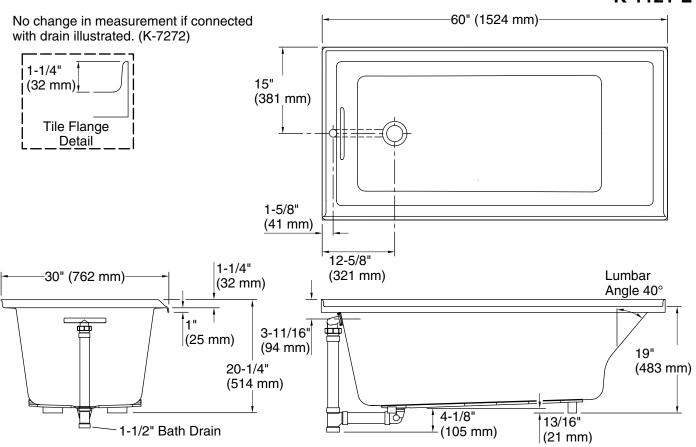

# **Technical Information**

All product dimensions are nominal.

Installation:	Three-wall alcove
Drain location:	Left
Basin area, bottom:	42-7/16" x 20" (1078 mm x 508 mm)
Basin area, top:	54-5/16" x 24-1/4" (1380 mm x 616 mm)
Weight:	75 lbs (34 kg)
Minimum floor load:	42 lbs/ft² (205.1 kg/m²)
Water depth:	15-1/8" (384 mm)
Water capacity:	59.8 gal (226.4 L)
Minimum flat for door:	1-15/16" (50 mm)

## Notes

Measure your actual product for rough-in details. Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

ADA compliant when installed to the specific requirements of these regulations.

