

R.W. ATLAS

RWXS61

R.W. Atlas Exposed Thermostatic System with Handshower, Diverter and Wheel Handle



SHOWN IN R.W. ATLAS EXPOSED THERMOSTATIC SYSTEM WITH HANDSHOWER, DIVERTER AND WHEEL HANDLE| RWXS61

TECHNICAL DETAILS

Adjustable versus Fixed Spray: Fixed Spray
Diameter of Head: 8 9/16"
Escutcheon Primary Material: Brass
Fittings Hole Diameter: 1"
Flow Restriction Options: 2.5, 2.0, 1.75, 1.5, 0.92
Depth / Width: 29 5/16"
Height: 79 1/16"
Inlet Connection Size: 3/4"
Inlet Connection Type: Copper Compression
Inlet Supply Spread Maximum: 11 3/4"
Inlet Supply Spread Minimum: 11 1/2"
Installation Type: Wall Mounted
Integrated Diverter: Y
Integrated Spray: N
Number of Handles: Two
Primary Material: Brass
Suggested Application: Bath
Valve Material: Bi-metal Strip
Water Pressure Maximum: 85.0 psi
Water Pressure Minimum: 20.0 psi
Water Pressure Recommended: 45.0 psi

INSPIRATION

Powerful shapes, genuine materials and unique aesthetic details. The original, impeccable vision of R.W. Atlas pairs American ingenuity with European craftsmanship.

PRODUCT FEATURES

Features a flat round 8" shower head

Exposed slotted screws around shower head offer added design detail.

Built in Anti-scald protection.


Stocked in 2.5gpm (9.5 L/min) and 1.75gpm (6.6 L/min). State of California requires 1.75gpm (6.6 L/min) to comply with their water conservation requirements. Other flow options are available to order, contact your sales associate or call 1 (800) 899-6757 for details.

WATERWORKS


R.W. ATLAS

RWXS61


R.W. Atlas Exposed Thermostatic System with Handshower, Diverter and Wheel Handle

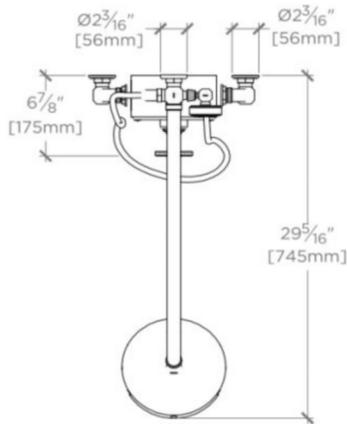

TOP VIEW SCALE: $\frac{3}{4}$ "=1'-0"

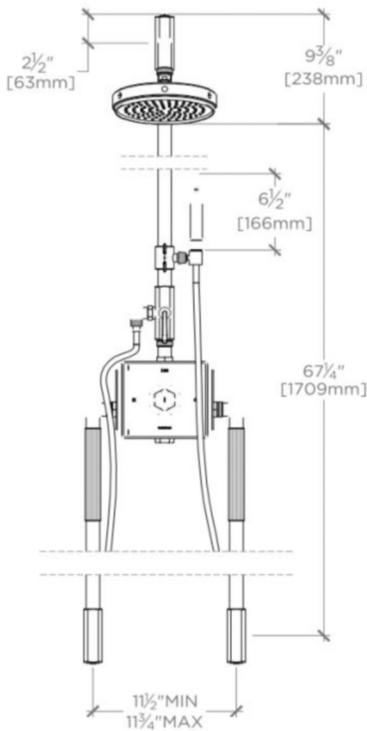

FRONT VIEW SCALE: $\frac{3}{4}$ "=1'-0"

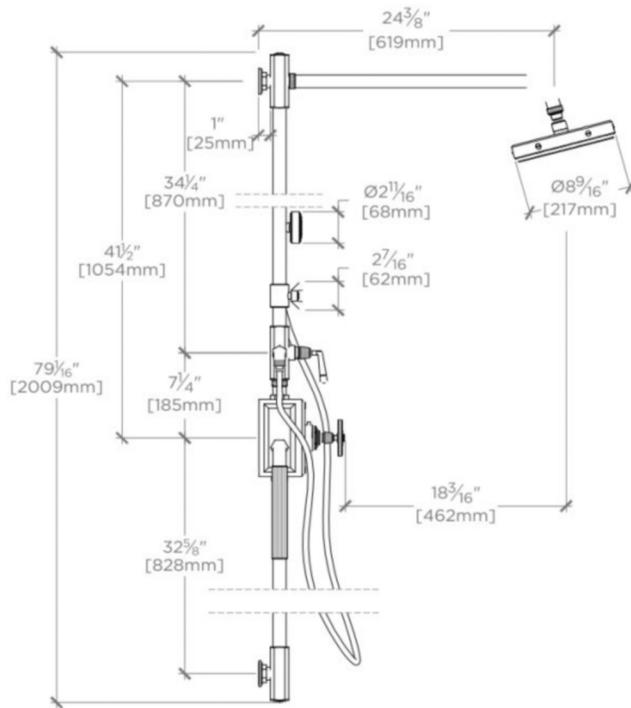

SIDE VIEW SCALE: $\frac{3}{4}$ "=1'-0"