


**E45714**



**Collection:** JULY

**Finish\*:**

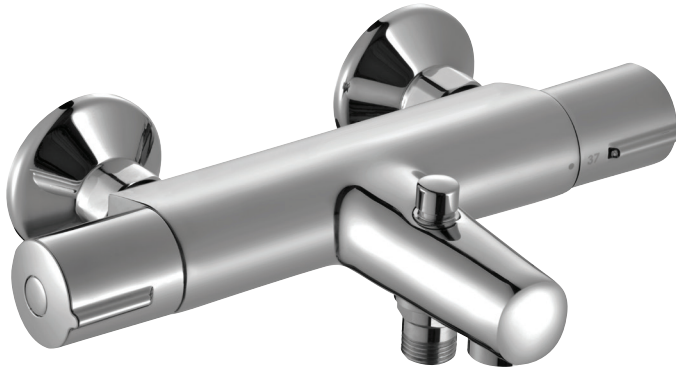

CP - Chrome

**Main features:**



**Features**

- WEIGHT: 2.1 kg
- INSTALLATION TYPE: 2 holes
- TYPE: Single-lever
- CONNECTION: With connectors and wall escutcheons
- HOLE CONFIGURATION: 150 ± 15
- INSTALLATION TYPE: 2 holes
- WARM BODY: Yes
- DIVERTER: Automatic pushbutton diverter
- Water savings: push-in button at mid-flow
- MATERIAL: Metal
- NORMS AND REGULATION: NF : ID/A - ECAU : E3/1 C3 A2 U3 - Ge5 - ACS 10 ACCLY103
- FLOW RATE: 20 l/mn
- MECHANISM: Expanding wax thermostatic cartridge
- WATER/ENERGY-SAVING: WATER-SAVING
- SAFETY STOP: 37°C
- NON-RETURN VALVE: Yes
- MECHANISM GUARANTEE: 5 years
- Non-return valves on supplies


**Consumer benefits**

- SAFETY: Maximum temperature set at 50°
- Anti-scale aerator

**Installation benefits**

- EASY INSTALLATION: Connectors and wall escutcheons

**Technical drawing**

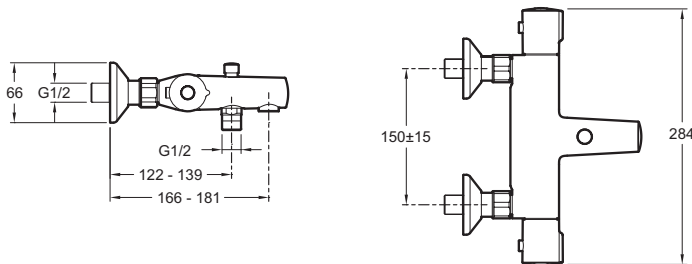

Product Specification: Thermostatic single-lever wall-mount bath/shower mixer. E45714. Collection: JULY. WEIGHT: 2.1 kg. MATERIAL: Metal. INSTALLATION TYPE: 2 holes. NORMS AND REGULATION: NF : ID/A - ECAU : E3/1 C3 A2 U3 - Ge5 - ACS 10 ACCLY103. TYPE: Single-lever. FLOW RATE: 20 l/mn. CONNECTION: With connectors and wall escutcheons. MECHANISM: Expanding wax thermostatic cartridge. HOLE CONFIGURATION: 150 ± 15. WATER/ENERGY-SAVING: WATER-SAVING. INSTALLATION TYPE: 2 holes. SAFETY STOP: 37°C. WARM BODY: Yes. NON-RETURN VALVE: Yes. DIVERTER: Automatic pushbutton diverter. MECHANISM GUARANTEE: 5 years. Water savings: push-in button at mid-flow. Non-return valves on supplies.

\*Due to possible variations in computer and printer calibrations, technical factors and certain finish characteristics, the colors you see may not accurately portray the actual colors and are provided as a guide only.