

## IEC SYSTEM FOR MUTUAL RECOGNITION OF TEST CERTIFICATES FOR ELECTRICAL EQUIPMENT (IECEE) CB SCHEME

## CB TEST CERTIFICATE

Product

Switch-disconnector

Name and address of the applicant

**SCHNEIDER ELECTRIC INDUSTRIES SAS**  
35, rue Joseph Monier  
92500 RUEIL MALMAISON - France

Name and address of the manufacturer

**SCHNEIDER ELECTRIC INDUSTRIES SAS**  
31 rue Pierre Mendes France, Eybens  
38050 GRENOBLE Cedex 9 - France

Name and address of the factory

 Additional Information on page 2

Note: When more than one factory, please report on page 2

Ratings and principal characteristics

See Annex

Trademark (if any)



Customer's Testing Facility (CTF) Stage used

CTF Stage 2

Model / Type Ref.

Series MASTERPACT  
Models: MT40b HH, MT50 HH, MT63 HH

Additional information (if necessary may also be reported on page 2)

 Additional Information on page 2

A sample of the product was tested and found to be in conformity with

IEC 60947-1:2007 +A1:2010  
IEC 60947-3:2008(ed.3) +A1:2012


As shown in the Test Report Ref. No. which forms part of this Certificate

139181-680611B, 139181-680611B/1, 139181-680611B/2,  
139181-680611B/A1, 139181-680611B/1/A1,  
139181-680611B/2/A1, 146158-698428.

This CB Test Certificate is issued by the National Certification Body



LCIE – Laboratoire Central des Industries Electriques  
33, avenue du Général Leclerc – BP8  
FR 92 266 Fontenay aux Roses Cedex  
[www.lcie.fr](http://www.lcie.fr)

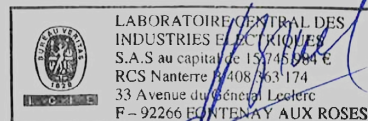

Date: 12/10/2017

Signature: **Jean-François BRUEL**  
Certification Officer

## ANNEX

**Name and address of the factories:**

**Schneider Shanghai power Distribution Elec.App.Co. Ltd**  
833 Kang Qiao Road Pudong Area  
201315 SHANGHAI - China

**SCHNEIDER ELECTRIC FRANCE SAS - Master-Tech**  
Centr'Alp - 70 rue de la Grange Bâtie  
38430 MOIRANS - France


## REFERENCES, MAIN CHARACTERISTICS

## Series Masterpact

Rated characteristics	Models		
	MT40b HH	MT50 HH	MT63 HH
Operational current (Ie)	4 000 A	5 000 A	6 300 A
Frequency	50 Hz / 60 Hz		
Operational voltage (Ue )	690 Vac		
Insulation voltage (Ui)	1 000 V (main circuit)		
Impulse withstand voltage (Uimp)	12 kV (main circuit)		
Short-time withstand current (Icw)	100 kA - 1 s		
Utilization category	B		
Reference temperature	50 °C		
Device suitable for isolation	yes		
Duty	uninterrupted		



LCIE – Laboratoire Central des Industries Electriques  
33, avenue du Général Leclerc – BP8  
FR 92266 Fontenay aux Roses Cedex  
[www.lcie.fr](http://www.lcie.fr)



Date: 12/10/2017

Signature: **Jean-François BRUEL**  
Certification Officer