

### Features

- 19"x19" panel contains 775 silicone concave nozzles and provides wide coverage area with easy-to-clean nozzles.
- Deluge function is actuated from center of panel with a diverter valve in manual showers or actuated directly with the DTV+ system.
- Deluge™ function delivers approximately 0.5 gallons of water in 8 seconds at the push of a button.
- Center of the panel is designed as a rain-free zone to keep user's face dry and encourage easy breathing.
- Can be configured with a manual valve system in coordination with the K-76746 Real Rain diverter valve or as part of the DTV+ digital showering system.
- 2.0 gpm (7.6 l/min) maximum flow rate.

### Installation

- Mounts flush to the surface of a drop ceiling.
- Z-bracket contains four leveling nuts to simplify installation.
- 1/2-inch NPT male water supply inlet.
- If using DTV+ system the user interface requires K-99693-P.
- Easy-mount bracket and panels simplify installation.
- Mounts flush to the surface of a drop ceiling.
- If using DTV Prompt system, diverter valve K-76746 and trim K-76748 are required to actuate Deluge function.
- Requires K-31111 Real Rain overhead panel trim.

### Required Products/Accessories

K-31111 overhead panel trim  
K-76746 Diverter Valve  
K-76748 diverter valve trim

or

K-31111 overhead panel trim  
K-99693-P digital interface  
K-99694 Interface Mounting Bracket  
K-99695 System Controller Module

### Recommended Products/Accessories

K-23723 Faucet cleaner



### Codes/Standards

ASME A112.18.1/CSA B125.1  
DOE - Energy Policy Act 1992


### KOHLER® Faucet Lifetime Limited Warranty


See website for detailed warranty information.

### Available Colors/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
-------	------	-------------

	0	White
--	---	-------

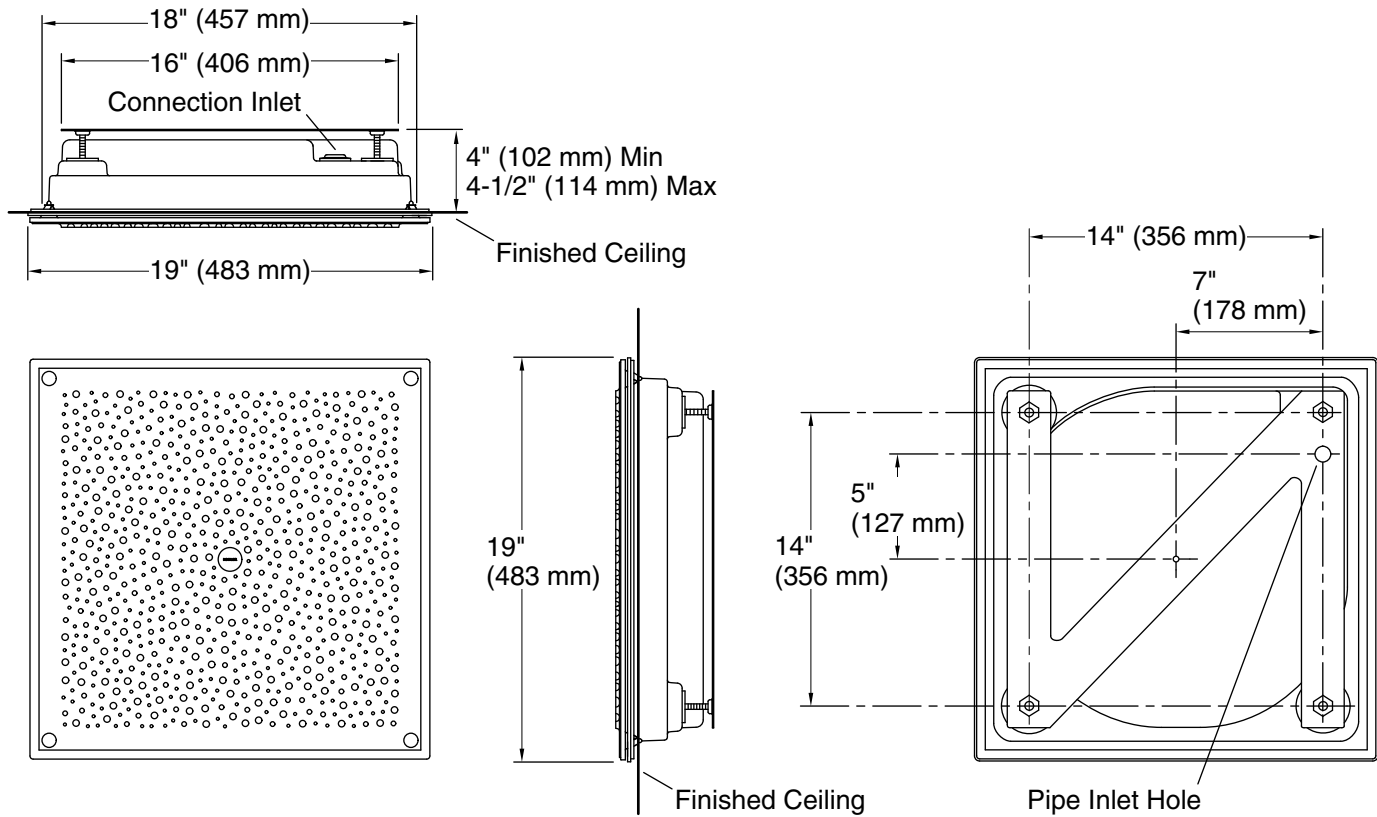

### Technical Information

All product dimensions are nominal.

Drain included: No

### Showerhead/Body Spray:

Rated maximum flow: 2 gal/min (7.6 l/min)

Pressure: 45 psi (3.1 bar)

### Notes

For use with automatic compensating valves rated at 1.75 gal/min (6.6 l/min) or less.

Install this product according to the installation instructions.