



# Veil® Comfort Height®

Intelligent compact elongated chair height toilet

## K-5401

### Features

- Compact, streamlined one-piece toilet with integrated cleansing.
- Elongated bowl offers added room and comfort.
- Tankless design with direct water supply.
- Dual flush offers a choice of 0.8 or 1.28 gpf (3.0 or 4.8 lpf).
- Front and rear wash modes provide warm water for cleansing.
- Self-cleaning function uses UV light and electrolyzed water systems to sanitize the wand surfaces.
- Warm-air drying system with adjustable temperature settings.
- Automatic deodorization system.
- Heated seat with adjustable temperature settings.
- Motion-activated, hands-free opening/closing of seat and cover.
- Quiet-Close™ prevents slamming by slowly bringing the toilet seat and lid to a gentle close.
- LED lighting illuminates the bowl to serve as a nightlight.
- Integrated bidet functionality featuring a single bidet wand made of stainless steel.
- Adjustable spray shape, position, water pressure, water temperature, pulsate, and oscillate functions for the bidet wand.
- Touchscreen LCD remote.
- Emergency back-up flush feature for power outages.

### Material

- Vitreous china.

### Installation

- Standard 12" (305 mm) rough-in.
- For optimum flushing performance, a minimum water supply flow rate of 9.0 gallons per minute or 1.5 gallons in 10 seconds must be confirmed, prior to installation.

### Recommended Products/Accessories

K-23726 Drain treatment

### Included Components

Additional Components:

- LCD remote control
- Seat
- braided inlet hose
- power cord
- supply stop valve



### Codes/Standards

- ASME A112.19.2/CSA B45.1
- ASME A112.19.14
- ASME A112.4.2/CSA B45.16
- DOE - Energy Policy Act 1992
- EPA WaterSense®
- California Energy Commission (CEC)
- UL 1951
- CSA C22.2 No. 14
- CSA C22.2 No. 68


### KOHLER® Intelligent Toilet and C3® Cleansing Seat Three-Year Limited Warranty

See website for detailed warranty information.

### Available Colors/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
	0	White

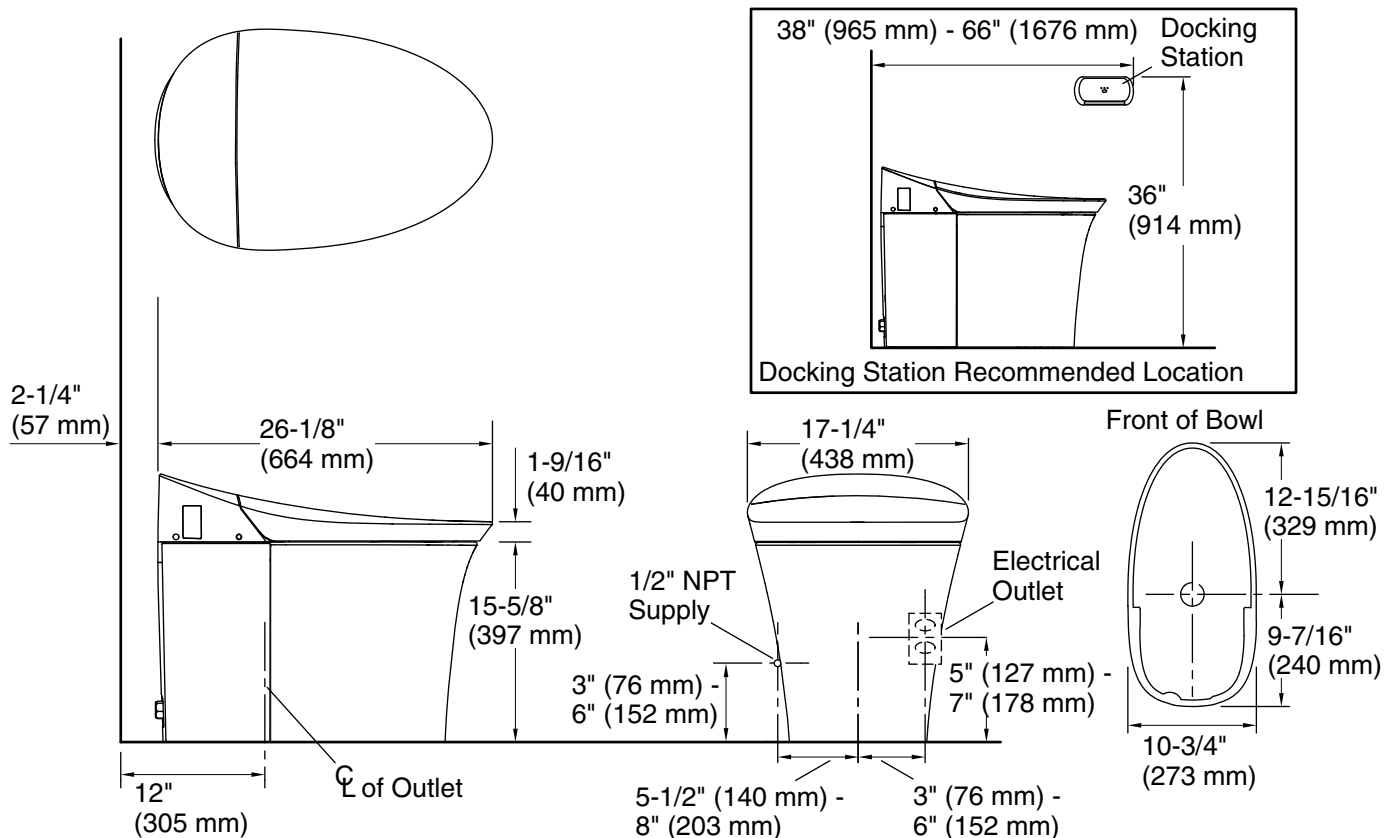

### Required Electrical Service

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).  
120 V, 15 A, 60 Hz

### Technical Information

All product dimensions are nominal.

Toilet type:	One-piece, Floor-mount
Waste Outlet:	Floor
Bowl shape:	Elongated
Trap passageway:	2-1/8" (54 mm)
Water Consumption	
Full:	1.28 gpf (4.8 lpf)
Reduced:	0.8 gpf (3 lpf)
Water surface size:	7-15/16" x 5-5/8" (202 mm x 143 mm)
Rough-in:	12" (305 mm)

### Notes

Install this product according to the installation instructions.

This product is designed for installation with the electrical and water supplies located through either the wall or the floor.

**IMPORTANT!** Use the supply hoses provided with the fixture. Do not reuse the previously installed hoses.