



44 515 660




- Infrared sensor technology
- 125mm projection
- height of mixer 140 mm
- height up to aerator 52 mm
- hole diameter 35 mm
- fixed spout
- max. flow 5.7 l/min
- circular, air-enriched flow
- suitable for thermal disinfection
- Automatic shut-off after pre-set time is reached
- Direct temperature control at faucet
- Battery-powered (batteries not included)
- 1x CR-P2 battery required
- lead-free
- 2x screw-in M 8 x 1 pressure hose, leak-tested
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB
  WRAS 2212021

Batteries not included


Brushed Durabrass (23kt Gold)	44 515 660-28
Chrome	44 515 660-00
Brushed Platinum	44 515 660-06
Platinum	44 515 660-08
Dark Chrome	44 515 660-19
Light Gold	44 515 660-26
Brushed Light Gold	44 515 660-27
Matte Black	44 515 660-33
Brushed Bronze	44 515 660-42
Brushed Champagne (22kt Gold)	44 515 660-46
Champagne (22kt Gold)	44 515 660-47
Brushed Chrome	44 515 660-93
Brushed Dark Platinum	44 515 660-99







#### Flow rate chart



### Codes & Standards

DIN 4109 ISO 3822 Scottish Water UK Water Supply Byelaws Regulations

Ü-Zeichen



META

44 515 660 Certificates

LGA\_38

WRAS\_2212






44 515 660

### Product version from 7/1/2023

Parts for other finishes can be found here: Chrome

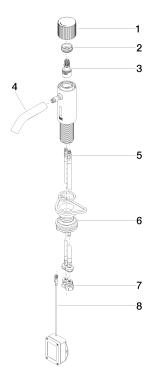



META

44 515 660

## **Spare parts list**

### **Product version from 7/1/2023**

No.	Item Number	Name	Quantity used	Delivery time
	90 20 66 124 00-28	handle	10	20