

Windward® 6' Bath K-1115-R

#### **Features**

- Decked oval shape creates a graceful and spacious bathing experience.
- Generous 6-foot length provides spacious bathing for up to two people.
- Molded lumbar support and armrests offer extra comfort while bathing.
- Integral flange helps prevent water from seeping behind wall and simplifies alcove installation.

#### Material

Acrylic.

#### Installation

- Right drain.
- Alcove.

#### **Recommended Products/Accessories**

K-7166-AF Bath Drain K-11677 Bath Drain K-24916 Wireless Music Kit K-23726 Drain treatment K-23732 Tub & shower cleaner



#### Codes/Standards

CSA B45.5/IAPMO Z124 ASTM E162 ASTM E662

### KOHLER® Plastic Baths and Receptors Lifetime Limited Warranty

See website for detailed warranty information.

#### Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Biscuit
	47	Almond






# **KOHLER**®


## Windward®


6' Bath **K-1115-R** 


No change in measurements if connected with drain illustrated. (K-11677)

Recommended Faucet Location



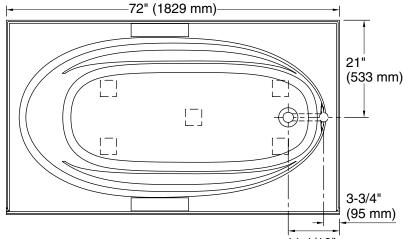



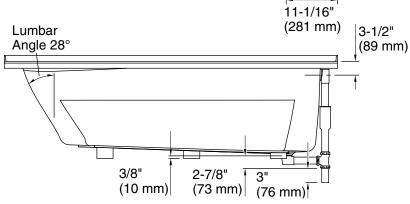

#### **Technical Information**

All product dimensions are nominal.

Installation: Three-wall alcove

Drain location: Right

Basin area, bottom: 55" x 23-1/4" (1397 mm x 591 mm)
Basin area, top: 64" x 32" (1626 mm x 813 mm)

Weight: 100 lbs (45.4 kg)

Minimum floor load: 38 lbs/ft<sup>2</sup> (185.5 kg/m<sup>2</sup>)

Water depth: 15" (381 mm)
Water capacity: 78.5 gal (297.2 L)
Minimum flat for door: 3-1/16" (78 mm)

#### **Notes**

Measure your actual product for rough-in details. Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

If installing a rim-mount faucet, make sure there is no interference above or below the deck before drilling any holes.

