

### Features

- Multi-function handshower offers full-coverage and targeted massage spray settings.
- Ergonomic design is comfortable and easy to grip.
- MasterClean™ sprayface resists hard water buildup and is easy to clean.
- 2.0 gpm (7.6 l/min) maximum flow rate.
- Contains flow regulating check valve for backflow prevention.

### Installation

- Deck-mount holder required for deck-mount installation.
- Bracket or sidebar required for wall-mount installation.

### Water Conservation & Rebates

- This product can help a building earn Water Efficiency points in LEED® Green Building Rating System.

### Required Products/Accessories

- K-8593 72" Shower Hose
- K-9514 60" Shower Hose

### Recommended Products/Accessories

- K-23723 Faucet cleaner



### Codes/Standards







- ASME A112.18.1/CSA B125.1
- DOE - Energy Policy Act 1992
- EPA WaterSense®
- OBC


### KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

### Available Colors/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
	CP	Polished Chrome
	SN	Vibrant® Polished Nickel
	BN	Vibrant® Brushed Nickel
	BV	Vibrant® Brushed Bronze
	2BZ	Oil-Rubbed Bronze
	BL	Matte Black

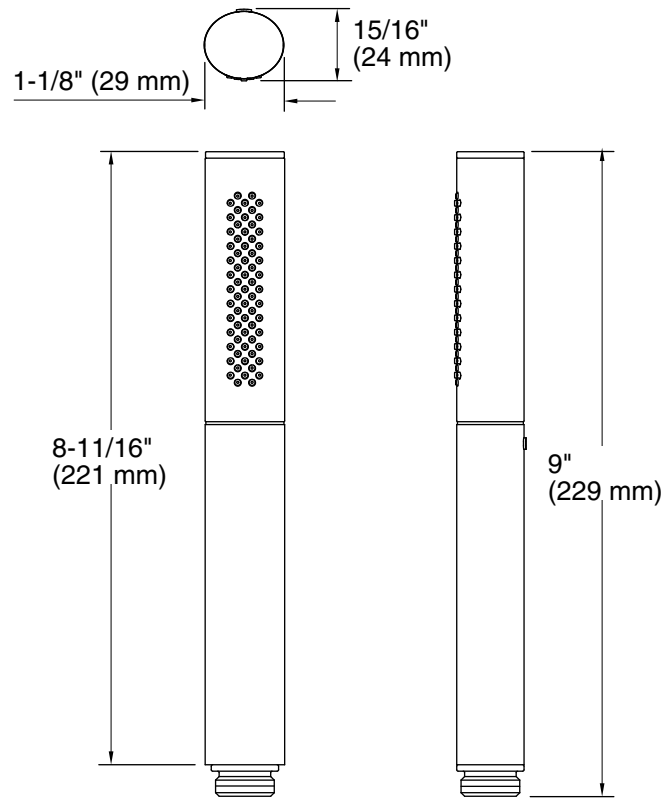

### Technical Information

All product dimensions are nominal.

#### Handshower:

Rated maximum flow: 2 gal/min (7.6 l/min)

### Notes

Install this product according to the installation guide.

Plumbing codes require an atmospheric vacuum breaker (such as Kohler Model K-9660) be installed in-line with handshowers. Please consult with local plumbing officials.

Note: Handshower contains flow regulating check valve for backflow prevention.

OBC compliant when installed to the specific requirements of these regulations.