

Underscore® Rectangle

60" drop-in bath **K-1130**

Features

- Molded lumbar support offers extra comfort while bathing.
- Slotted overflow allows for deep soaking.

Material

Acrylic.

Installation

• Drop-in.

Required Products/Accessories

K-7271 Brass Slotted Overflow Bath Drain or

K-7272 PVC Slotted Overflow Bath Drain

Recommended Products/Accessories

K-590 5' under-mount installation kit K-24916 Wireless Music Kit K-1601 Bath/Whirlpool Footstop K-1177 Vinyl Tiling-in Bead K-23726 Drain treatment K-23732 Tub & shower cleaner



Codes/Standards

CSA B45.5/IAPMO Z124 ASTM E162 ASTM E662

KOHLER® Plastic Baths and Receptors Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.


Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	95	Ice™ Grey
	G9	Sandbar
	K4	Cashmere
	58	Thunder™ Grey
	7	Black Black™







Underscore® Rectangle


60" drop-in bath K-1130

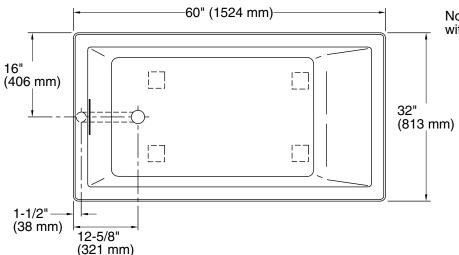

No change in measurements if connected with drain illustrated. (K-7272)



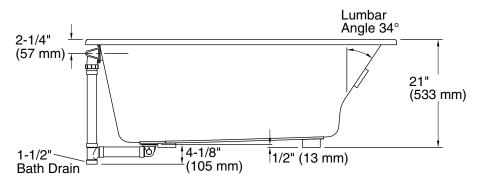



Technical Information

All product dimensions are nominal.

Installation: Drop-in Drain location: End

42" x 23-1/2" (1067 mm x 597 mm) Basin area, bottom: 55-1/8" x 27-1/8" (1400 mm x 689 mm) Basin area, top:

Weight: 75 lbs (34 kg)

Minimum floor load: 58 lbs/ft2 (283.2 kg/m2) Water depth: 17-1/8" (435 mm) Water capacity: 81 gal (306.6 L)

Drop-in, 59-1/2" x 31-1/2" (1511 mm x Cutout:

800 mm)

Minimum flat for door: 2-3/8" (60 mm)

Notes

Measure your actual product for rough-in details. Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Kit is required for under-mount installations (sold separately).

