

A form

Technical data sheet



Undermount basins UB.SO450.2

Article number: 3506501000 Design partner: busalt design



Features

Description
Article number
Standard colour
Special surfaces

Construction
Special versions
Dimensions
Material
Net weight
Installation
Accessoires

Tap fitting information

Tap fittings with a vertical outlet and aerator provide the optimum flow of water onto the surface below (angle of impact: 90°).

UB.SO450.2 3506501000 White


White easy-clean (XXXX XXX 400) White antibacterial (XXXX XXX 401) without tap hole, without overflow special- or matt colour

ø 456 x 130mm Glazed steel 7,2 kg

for installation from below

Bottle trap SI.2, Bottle trap SI.3, Drain valve VTI.1

Optimum point of impact approx. 60 – 170mm from rear edge of basin.

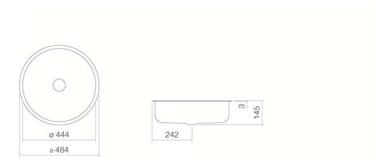

Text for invitation to tender

Undermount basin, round, mould \emptyset 456mm, depth 145mm, glazed inside and outside, white, without tap hole and overflow, including drain valve with chrome-plated cap (Water can be accumulated via the use of the Clou waste from Geberit.)

Brand: Alape Model: UB.SO450.2