

A form

Technical data sheet



Undermount basins UB.SO450.2

Article number: 3506504000 Design partner: busalt design



Features

Description Article number Standard colour Special surfaces

Construction Special versions Dimensions Material Net weight Installation

Tap fitting information

Accessoires

Tap fittings with a vertical outlet and aerator provide the optimum flow of water onto the surface below (angle of impact: 90°).

UB.SO450.2 3506504000 White

White easy-clean (XXXX XXX 400) White antibacterial (XXXX XXX 401) without tap hole, without overflow


special- or matt colour ø 456 x 130mm Glazed steel 7,2 kg

for installation from below

Bottle trap SI.2, Bottle trap SI.3, Drain valve VTI.1

Optimum point of impact approx. 60 - 170mm from rear edge

of basin.

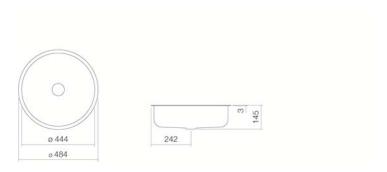

Text for invitation to tender

 $Undermount\ basin\ in\ HPL-coated\ counter\ tops,\ ,\ round,\ mould\ \varnothing\ 456mm,\ depth\ 145mm,\ glazed\ inside\ and\ outside,\ white,\ without\ solves and\ outside,\ white,\ without\ solves\ outside\ outside\$ tap hole and overflow, including drain valve with chrome-plated cap (Water can be accumulated via the use of the Clou waste from Geberit.)

Brand: Alape Model: UB.SO450.2