

Reference

**4100.**

Application

Outdoor

Installation type

Surface


Description

Outdoor bollard light designed by Xuclà & Alemany. It gives a pleasant, subtle light through the methacrylate diffuser, and can withstand tough outdoor conditions. Available in khaki lacquer, oxide lacquer and concrete.

Diffuser

Acrylic diffuser

Finish




4100-07.  
Khaki lacquer

4100-54.  
Oxide-brown  
lacquer

4100-80.  
Concrete

Sketch

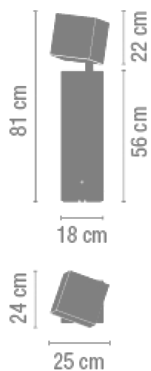

Electrical characteristics

1 x COMPACT FLUORESCENT E27 230V 15W



Total 15 W



Physical characteristics

1 Box / 0.88 x 0.35 x 0.34 m. / Vol. 0.1032 m<sup>3</sup> /  
Gross weight 11.8 kg. / Net weight 7.3 kg.


Installation and assembly

Follow instructions of the installation guide

Light distribution

Ground lighting


Reduced-height outdoor lamp to shade light on the ground.



Photometric data

Efficiency : 23.00%  
Coordinate system : C-G  
Total flux : 900.00 lm  
Maximum value : 82.36 cd/klm  
Light position : C=150.00 G=30.00  
Double symmetrical : 2

Isolux : Isolux (suelo)  
Light position :  
X=0.00m Y=0.00m Z=3.00m  
Light rotation :

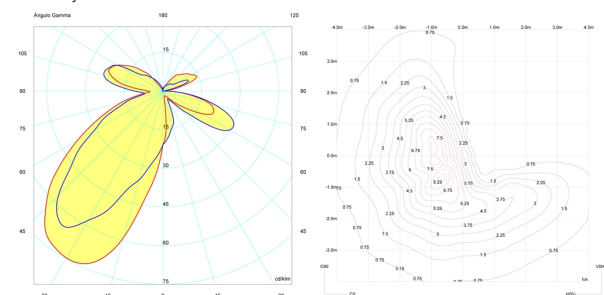

Certificates

