KOHLER_®

Features

- Bask[®] heated surface creates spa-like relaxation with soothing warmth on your back, shoulders, and neck.
- Three heat settings allow you to customize the surface temperature.
- Single-speed whirlpool offers performance and value, with 8 fully adjustable jets.
- Hydromassage flow and direction can be controlled at each jet.
- Molded lumbar support and armrests offer extra comfort while bathing.
- Integral apron.
- Textured bottom surface.

Material

Acrylic.

Hydrotherapy

• Whirlpool.

Installation

- Left drain.
- Three-wall alcove.

Recommended Products/Accessories

K-24916 Wireless Music Kit K-7161-AF 1-1/2" adjustable pop-up drain above- or through-floor K-1491 Bath/Whirlpool Pillow K-1601 Bath/Whirlpool Footstop K-702200-G54 Frameless Sliding Bath Door K-702200-L Frameless Sliding Bath Door K-702204-G54 Frameless Sliding Bath Door K-702204-L Frameless Sliding Bath Door K-702205-L Frameless Sliding Bath Door K-702200-G73 Frameless Sliding Bath Door K-37380 30" Rough-in Cable Bath Drain K-37383 Rough-in cable bath drain, PVC, 30" cable with tubing K-7213 27" Cable Bath Drain K-7214 27" Cable Bath Drain K-7259 Clearflo Bath Drain K-23726 Drain treatment K-23732 Tub & shower cleaner



Devonshire®

5' Whirlpool Bath

K-1357-LAW

Codes/Standards

ASME A112.19.7/CSA B45.10 CSA B45.5/IAPMO Z124 ASTM E162 ASTM E662 UL 1795

KOHLER[®] Plastic Baths and Receptors Lifetime Limited Warranty KOHLER[®] Hydrotherapy Components Five-Year Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.


Color Code Description

0	White
96	Biscuit
47	Almond
NY	Dune
G9	Sandbar



Devonshire® 5' Whirlpool Bath K-1357-LAW

No change in measurements if connected with drain illustrated. (K-7161-AF)

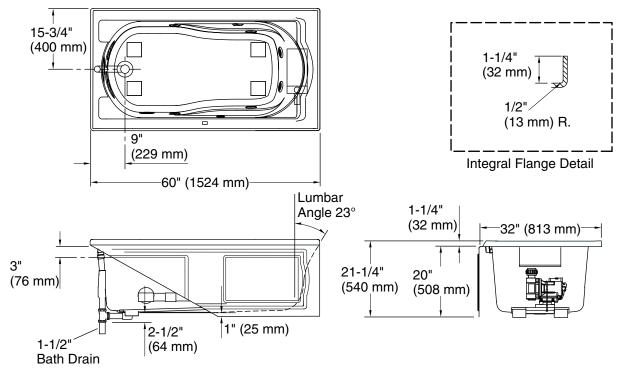

Required Electrical Service

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

Pump, Heated 120 V, 15 A, 60 Hz Surface:

Technical Information

All product dimensions are nominal.

•	
Installation:	Three-wall alcove
Drain location:	Left
Basin area, bottom:	42" x 20" (1067 mm x 508 mm)
Basin area, top:	51" x 24" (1295 mm x 610 mm)
Weight:	141 lbs (64 kg)
Minimum floor load:	50 lbs/ft² (244.1 kg/m²)
Water depth:	14" (356 mm)
Water capacity:	60 gal (227.1 L)
Electrical component	Pump: 120 V, 7 A, 60 Hz
rating:	Heated Surface: 120 V, 0.5 A, 60 Hz
Minimum flat for door:	2-1/2" (64 mm)

Notes

Measure your actual product for rough-in details. Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

