


**Set for 2-handles concealed thermostatic bath/shower mixer Simibox with integrated vacuum breaker with dimmer 2 ways
3.2375.6.004.210.1**

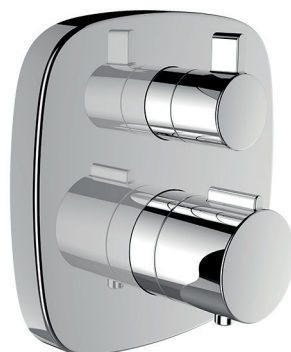

TECHNICAL DATA

Order no.	3.2375.6.004.210.1	Mounting acc. excl.	either Simibox Standard, concealed system for bath and shower mixer, order no. 3.7898.0.000.000.1 or Simibox Light, concealed system for bath and shower mixer:
Flow rate	Simibox Light: spout: 21.2 l/min (3bar) shower: 19.2 l/min (3bar) Simibox Standard: spout: 20.6 l/min (3bar) shower: 18.5 l/min (3bar)		with stop valve: order no. 3.7898.0.000.100.1 without stop valve: order no. 3.7898.0.000.101.1 Simibox, mounting aid for concealed bath and shower mixer, order no. 3.7998.0.003.000.1 Simibox, flange set, order no. 3.7998.0.000.500.1 Simibox, extension set L = 25 mm – order no. 3.7998.0.000.050.1 L = 50 mm – order no. 3.7998.0.000.060.1
Acoustic class	Simibox Light: spout: IDD shower: ID Simibox Standard: spout: IDD shower: ID	Surface finish	chrome
Specification	set for 2-handles concealed thermostatic bath/shower mixer Simibox with integrated vacuum breaker, with dimmer 2 ways thermostatic cartridge automatic diverter intrinsically safe against backflow		

TECHNICAL DRAWINGS

