


VOLA 080, 080D, 080DK, 080K, 080W

Fitting instruction  
 Montageanleitung  
 Monteringsvejledning  
 Monteringsvægledning  
 Montage hanleiding  
 Manuel de montage







| Data   | Bar:      | 1   | 2   | 3   | 4   | 5   |
|--|-----------|-----|-----|-----|-----|-----|
| 081/081K   | (l/min)   | 8   | 12  | 14  | 17  | 19  |
|  | (Gal/min) | 2.1 | 3.2 | 3.7 | 4.5 | 5.0 |
| 081D   | (l/min)   | 14  | 20  | 25  | 29  | 32  |
|  | (Gal/min) | 3.7 | 5.3 | 6.6 | 7.7 | 8.5 |
| 080W   | (l/min)   | 23  | 33  | 40  | 46  | 52  |
|  | (Gal/min) | 6.1 | 8.6 | 11  | 12  | 14  |
|  Max. 65°C. 150°F |           |     |     |     |     |     |



**VR161:**  
 VR161K: 7 l/min - 1.8 Gal/min  
 VR161D: 9 l/min - 2.5 Gal/min  
 VR161F: 14 l/min - 3.7 Gal/min

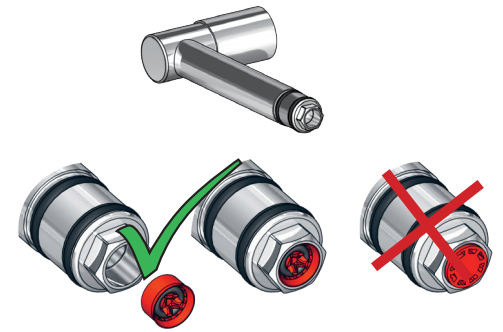

080W: Min. flow: 14 l/min - 3.7 Gal/min.

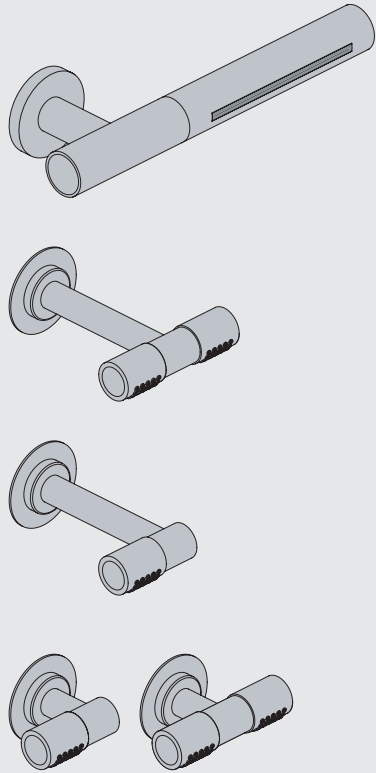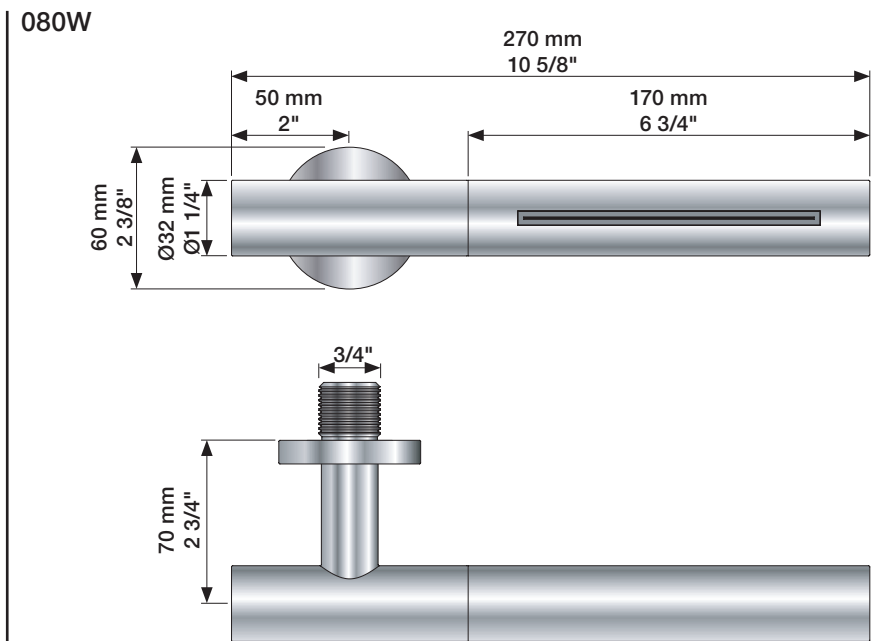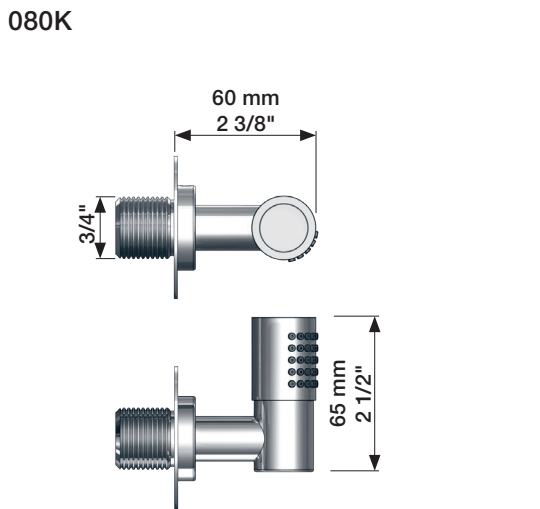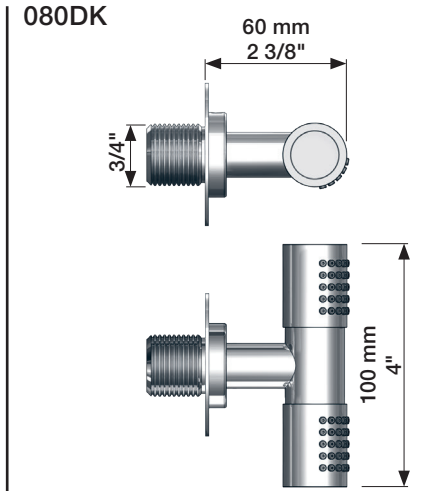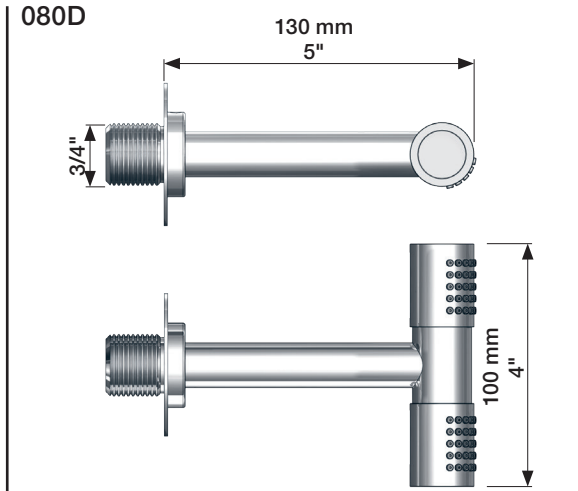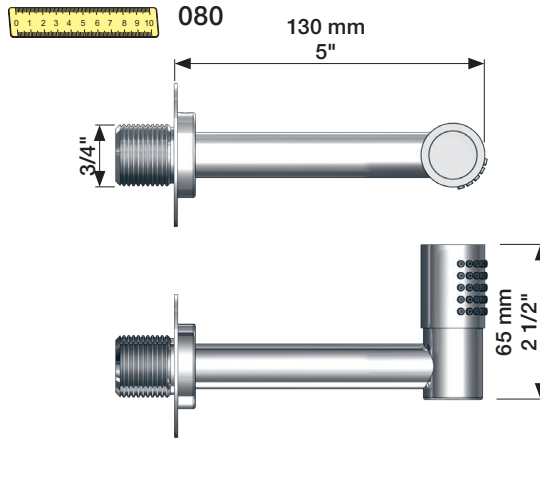



www.vola.com

mnt\_080\_V1\_40998355



5 705230 341507



vola

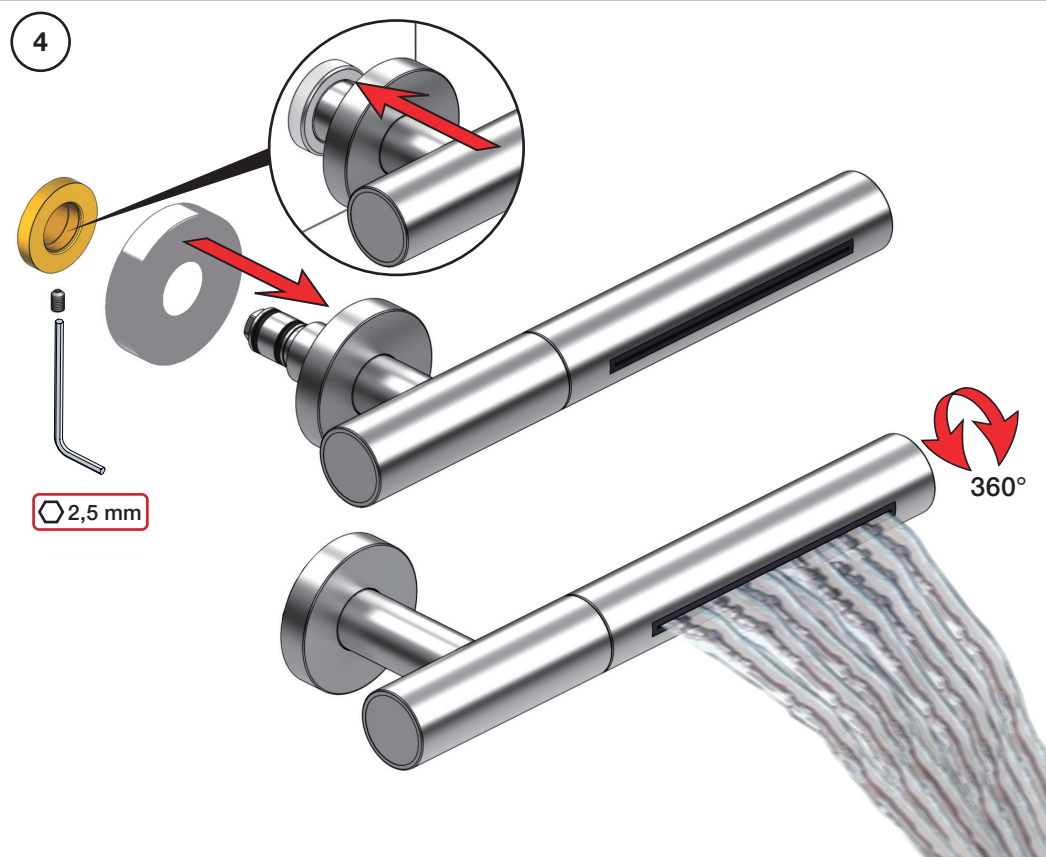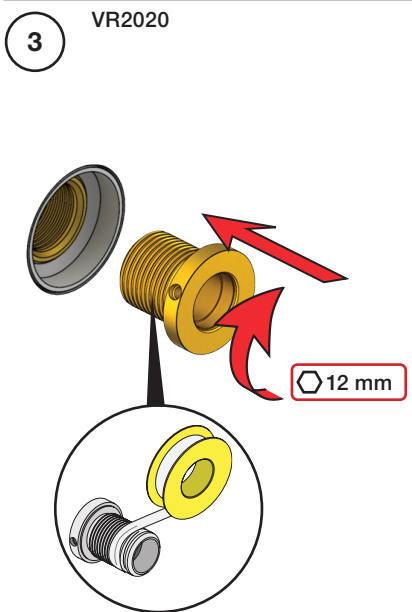

Extension Verlängerung Forlængerdele Förlängning Verlengstucken Modification

**T** Min. 3 mm  
Max. 65 mm


**Y** Min. 48 mm  
Max. 110 mm

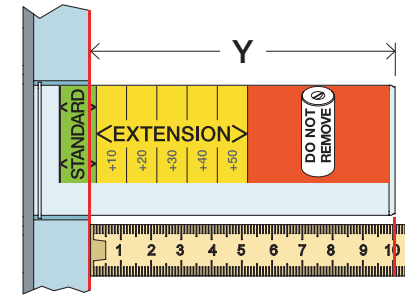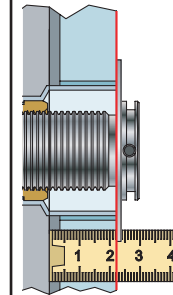


| T          | Y           | VR2019/2020 |
|------------|-------------|-------------|
| 3 - 15 mm  | 110 - 98 mm | Std.        |
| 15 - 25 mm | 98 - 88 mm  | +10         |
| 25 - 35 mm | 88 - 78 mm  | +20         |
| 35 - 45 mm | 78 - 68 mm  | +30         |
| 45 - 55 mm | 68 - 58 mm  | +40         |
| 55 - 65 mm | 58 - 48 mm  | +50         |

VR2019+


VR2020+

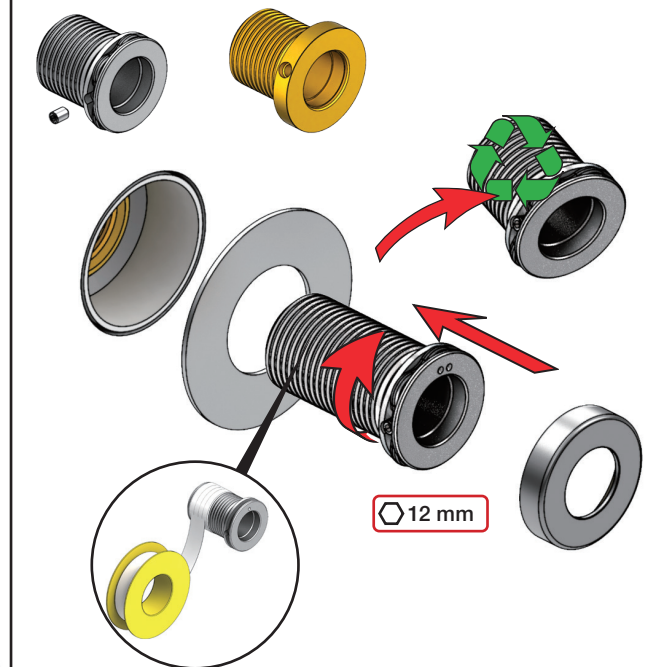


080





080K




080D



080DK

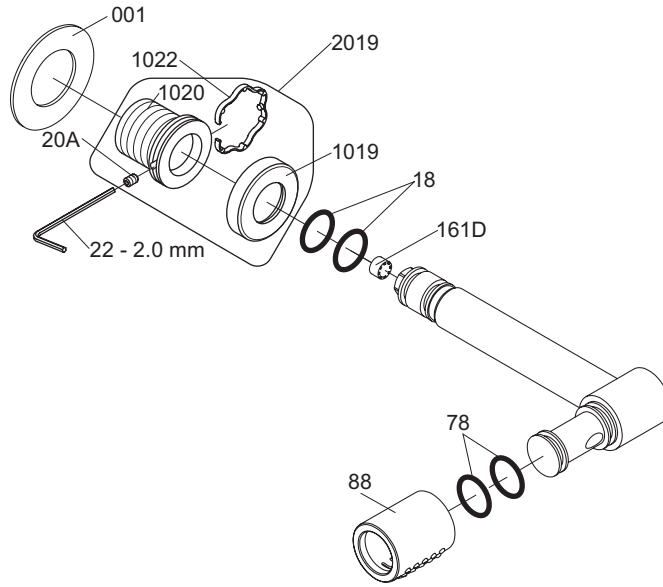

1902



VR1020K VR20A, VR22, VR1020, VR1022  
VR2019: VR20A, VR22, VR1019, VR1020, VR1022



vola

Lunavej 2  
DK-8700 Horsens  
Tlf : + 45 7023 5500  
sales@vola.com  
www.vola.com

# VOLA 080, 080K VOLA 080D, 080DK

Date  
Apr. 21

Rev.  
3

Sheet  
SB 17.3