

Devonshire® 5' Whirlpool Bath K-1357-H

Features

- Single-speed whirlpool offers performance and value, with 8 fully adjustable jets.
- Hydromassage flow and direction can be controlled at each jet.
- Built-in heater.
- Molded lumbar support and armrests offer extra comfort while bathing.
- Textured bottom surface.
- Coordinates with other products in the Devonshire collection.

Material

Acrylic.

Hydrotherapy

Whirlpool.

Installation

- Reversible drain.
- Drop-in.

Recommended Products/Accessories

K-1491 Bath/Whirlpool Pillow

K-1601 Bath/Whirlpool Footstop

K-7161-AF 1-1/2" adjustable pop-up drain above- or through-floor

K-7213 27" Cable Bath Drain

K-7214 27" Cable Bath Drain

K-24916 Wireless Music Kit

K-7259 Brass toe tap bath drain

K-37380 30" Rough-in Cable Bath Drain

K-37383 Rough-in cable bath drain, PVC, 30" cable with tubing

K-702200-G54 Frameless Sliding Bath Door

K-702200-G73 Frameless Sliding Bath Door

K-702200-L Frameless Sliding Bath Door

K-702205-L Frameless Sliding Bath Door

K-1177 Vinyl Tiling-in Bead

K-702204-L Frameless Sliding Bath Door

K-23726 Drain treatment

K-23732 Tub & shower cleaner



Codes/Standards

ASME A112.19.7/CSA B45.10 CSA B45.5/IAPMO Z124 ASTM E162 ASTM E662 UL 1795 CSA C22.2 No. 218.2

KOHLER® Plastic Baths and Receptors Lifetime Limited Warranty KOHLER® Hydrotherapy Components Five-Year Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

| Color | Code | Description |
|-------|------|-------------|
| | 0 | White |
| | 96 | Biscuit |
| | 47 | Almond |
| | NY | Dune |
| | G9 | Sandbar |






Devonshire®

5' Whirlpool Bath K-1357-H

No change in measurements if connected with drain illustrated. (K-7161-AF)

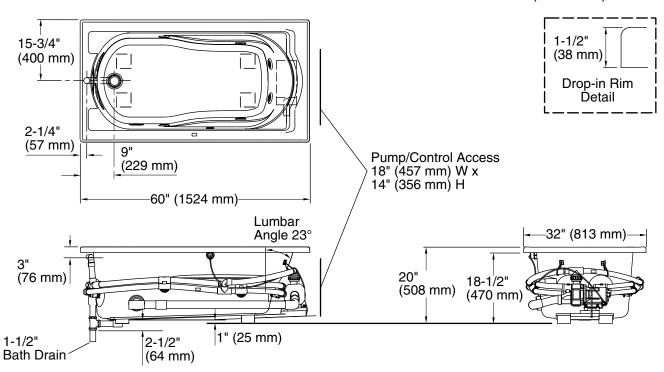

Required Electrical Service

Two dedicated circuits required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

Pump: 120 V, 15 A, 60 Hz Heater: 120 V, 15 A, 60 Hz

Technical Information

All product dimensions are nominal.

Installation: Drop-in Drain location: End

Basin area, bottom: 42" x 20" (1067 mm x 508 mm) Basin area, top: 51" x 24" (1295 mm x 610 mm)

Weight: 145 lbs (65.8 kg)
Minimum floor load: 50 lbs/ft² (244.1 kg/m²)

Water depth: 14" (356 mm)
Water capacity: 60 gal (227.1 L)

Cutout: Drop-in, 58" x 30" (1473 mm x 762 mm)

Electrical component Pump: 120 V, 7 A, 60 Hz


rating: Heater: 120 V, 12.5 A, 60 Hz, 1500 W

Pump speed: Single

Notes

Measure your actual product for rough-in details. Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.



Kohler Co. reserves the right to make revisions without notice to product specifications. For the most current Specification Sheet, go to www.kohler.com. 5-6-2020 08:19 - US/CA

