



Fitting instruction
Montageanleitung
Monteringsvejledning
Monteringsvægledning
Montagehanleiding
Manuel de montage

060:

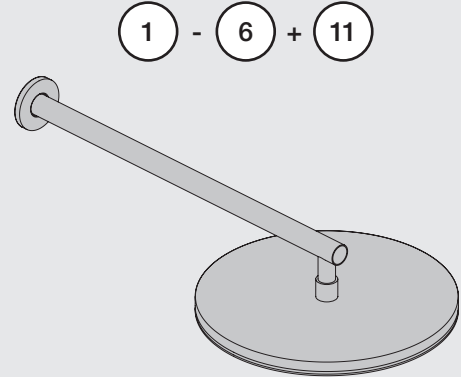

060A:

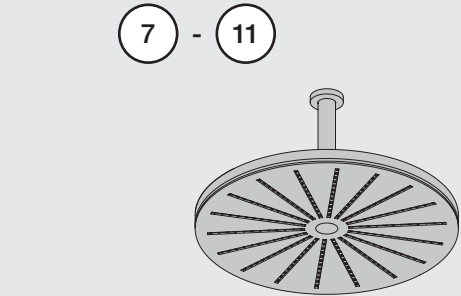

| Data | Bar: | 1 | 2 | 3 | 4 | 5 |
|------|------------------|-----|-----|-----|-----|-----|
| | (l/min) | 12 | 18 | 22 | 25 | 29 |
| | (Gal/min) | 3.4 | 4.8 | 5.8 | 6.6 | 7.7 |
| | Max. 65°C. 150°F | | | | | |

VR161 - 060, 060A:
VR161K: 1.8 Gal/min - 7 l/min
VR161D: 2.5 Gal/min - 9 l/min
VR161F: 3.7 Gal/min - 14 l/min

VR161K VR161D VR161F

3 + 10

060

200: 393 mm 15 1/2" -100: 493 mm 19 1/2" Std.: 593 mm 23 3/8"

200: 250 mm 9 7/8" -100: 350 mm 13 3/4" Std.: 450 mm 17 3/4"

80 mm 3 1/8"

Ø70 mm Ø2 3/4"

Ø286 mm Ø11 1/4"

1

Ø50 mm Ø2"

24 mm

VR648

2

3

VR161F: 14 l/min 3.7 Gal/min

4

4 - 8 mm 1/8" - 3/8"

2,5 mm

5




6 + 11

2,5 mm




1 + 2


3 + 4

1

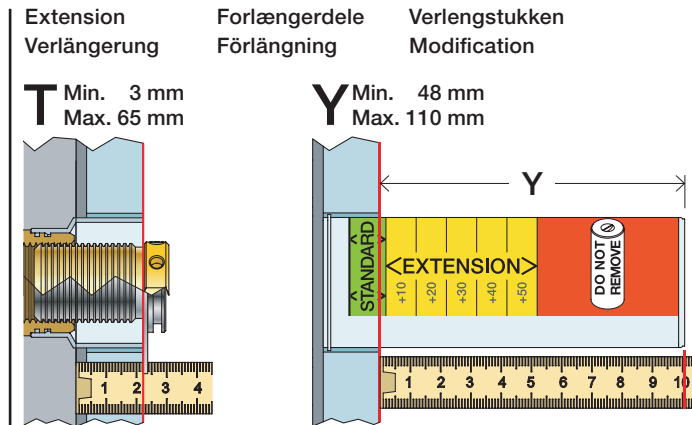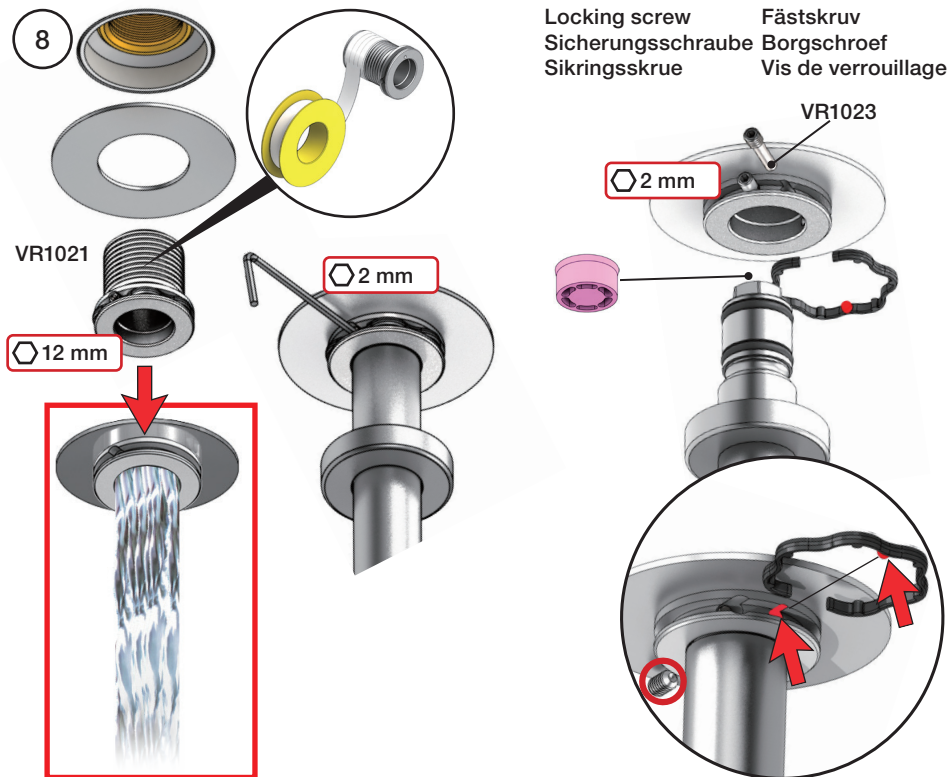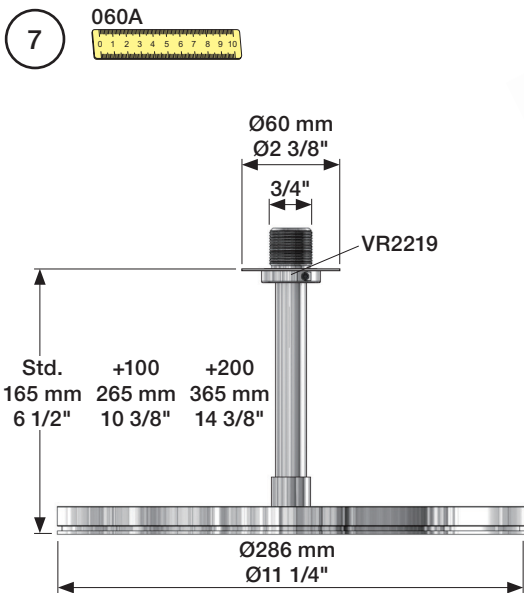

| T: VR2219 | T: VR648 | Y | |
|------------|------------|-------------|------|
| 3 - 15 mm | 3 - 19 mm | 110 - 98 mm | Std. |
| 15 - 25 mm | 17 - 28 mm | 98 - 88 mm | +10 |
| 25 - 35 mm | 27 - 38 mm | 88 - 78 mm | +20 |
| 35 - 45 mm | 37 - 48 mm | 78 - 68 mm | +30 |
| 45 - 55 mm | 47 - 58 mm | 68 - 58 mm | +40 |
| 55 - 65 mm | 57 - 68 mm | 58 - 48 mm | +50 |

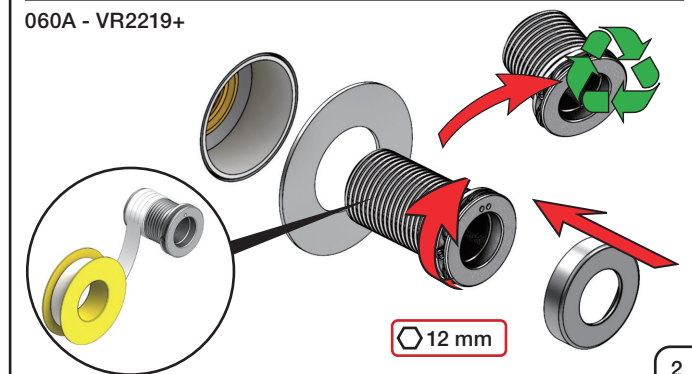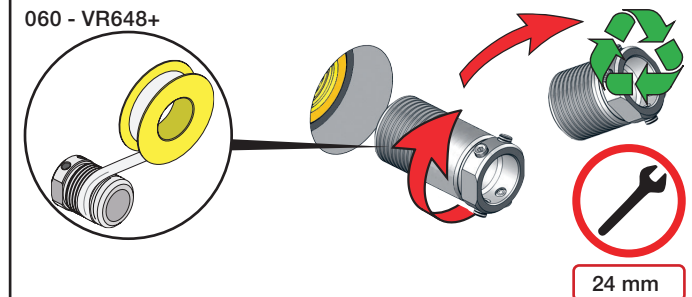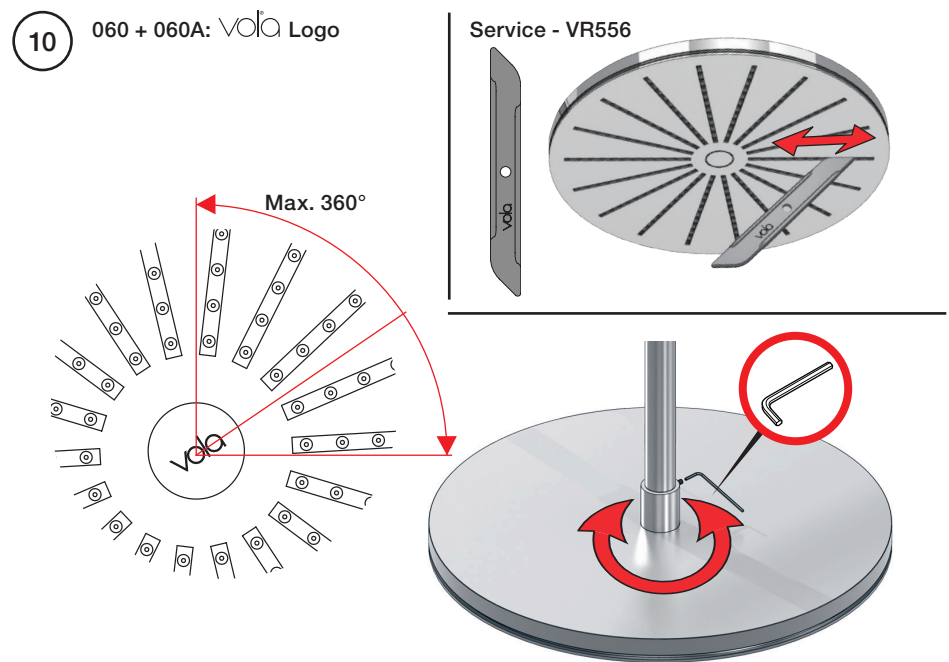

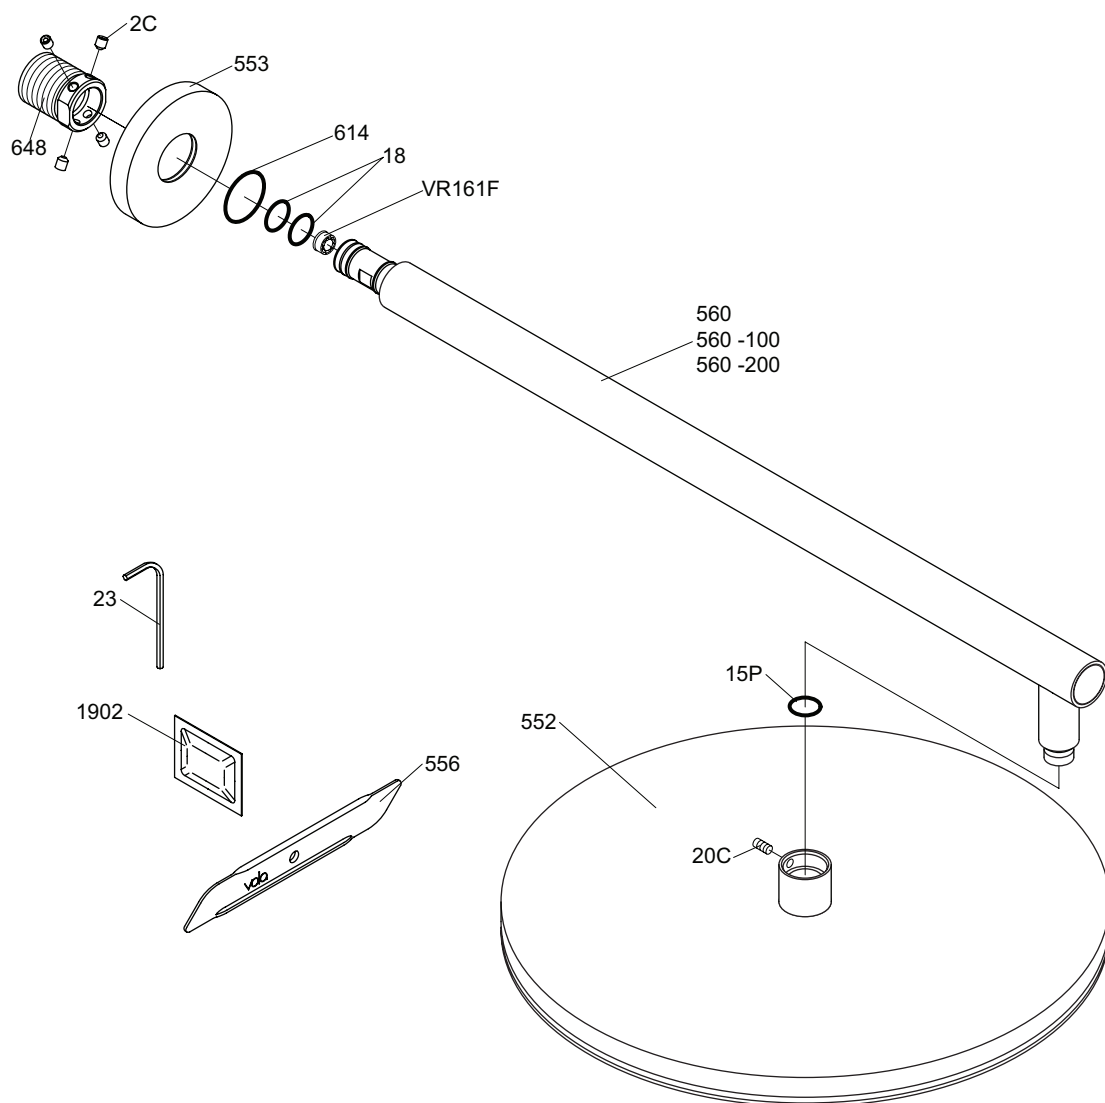

vola
 Lunavej 2
 DK-8700 Horsens
 Tlf : + 45 7023 5500
 Fax: + 45 7023 5511
 sales@vola.com
 www.vola.com

VOLA 060

Date
 mar. 14

Rev.
 1

Sheet
SB 15.1