

Shift® Ellipse Multifunction 2-Way Handshower, 2.0 gpm K-45415-A

## Features

- Multi-function handshower offers full-coverage and targeted massage spray settings.
- Ergonomic design is comfortable and easy to grip.
- MasterClean<sup>™</sup> sprayface resists hard water buildup and is easy to clean.
- 2.0 gpm (7.6 l/min) maximum flow rate.
- Contains flow-regulating check valve for backflow prevention.
- Bracket or slidebar required for wall-mount installation.

# Installation

Deck-mount holder required for deck-mount installation.

## Water Conservation & Rebates

 This product can help a building earn Water Efficiency points in LEED<sup>®</sup> Green Building Rating System.

# **Required Products/Accessories**

K-8593 72" Shower Hose K-9514 60" Shower Hose

# **Recommended Products/Accessories**

K-23723 Faucet cleaner



Codes/Standards ASME A112.18.1/CSA B125.1 DOE - Energy Policy Act 1992 EPA WaterSense® OBC

OBC

# KOHLER<sup>®</sup> Faucet Lifetime Limited Warranty

See website for detailed warranty information.

# Available Colors/Finishes

Color tiles intended for reference only.


Color Code Description CP Polished Chrome SN Vibrant® Polished Nickel ΒN Vibrant® Brushed Nickel ΒV Vibrant® Brushed Bronze 2BZ **Oil-Rubbed Bronze** BL Matte Black RGD Vibrant Rose Gold TT Vibrant Titanium



# Shift<sup>®</sup> Ellipse

# KOHLER. Faucets

Multifunction 2-Way Handshower, 2.0 gpm K-45415-A

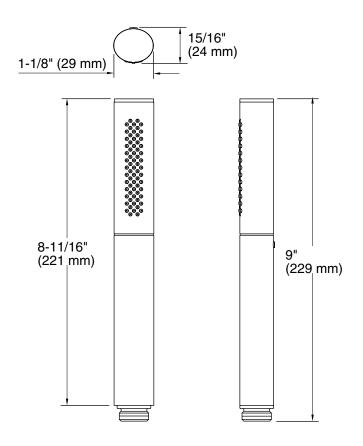

## **Technical Information**

All product dimensions are nominal.

#### Handshower:

Rated maximum flow: 2 gal/min (7.6 l/min)

#### Notes

Install this product according to the installation guide.

Plumbing codes require an atmospheric vacuum breaker (such as Kohler Model K-9660) be installed in-line with handshowers. Please consult with local plumbing officials.

Note: Handshower contains flow regulating check valve for backflow prevention.

OBC compliant when installed to the specific requirements of these regulations.

