


LAUFEN INSTALLATION SYSTEM

CB1 Concealed frame for wallhung bidet 89266.0

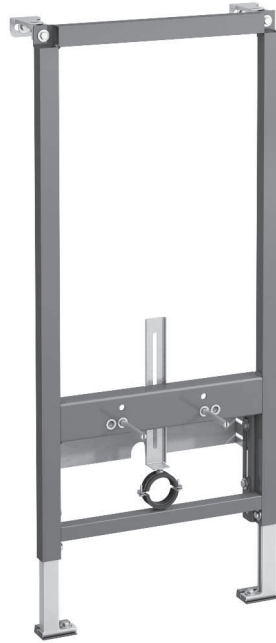

TECHNICAL DATA

Order no.	89266.0	Mounting acc. incl.	Fastening set to floor and wall, fastening set for ceramic and protection tubes for M12 threaded rods.
matching for	All LAUFEN wallhung bidets	Mounting acc. excl.	Sound insulation set, order no. 89269.6
Specifications	For mounting in front of a solid or drywall construction, self-supporting.	Accessories excl.	Support bar for handle and holding systems, order no. 89266.7, order no. 89266.8
Other specifications	Galvanized leg supports, rotatable, height-adjustable 0-200 mm. Supporting frame made of steel profiles. Capable to resist 400 kg	Mounting information	Please note the necessary wall thickness of 80 mm in case of pre-wall installation. Height from finished floor to top of bidet pre-set to 400 mm, adjustable between 390-450 mm. System installation is also possible between modular walls (plasterboard).
Water connection	R 1/2", brass The axial distance is adjustable between 80-360 mm, the height adjustable between 65-250 mm.	Colours	Surface powder coated blue
Installation depth	135-205 mm		
Weight	13,0 kg		

TECHNICAL DRAWINGS / S 1 : 20

