

### **Features**

- Oval-shaped basin creates a graceful and spacious bathing experience.
- Molded lumbar support and armrests offer extra comfort while bathing.
- Integral flange helps prevent water from seeping behind wall and simplifies alcove installation.

#### Material

Acrylic.

### Installation

- Left drain.
- Alcove.

## **Recommended Products/Accessories**

K-1284 Removable Apron

K-1491 Bath/Whirlpool Pillow

K-24916 Wireless Music Kit

K-1601 Bath/Whirlpool Footstop

K-7259 Clearflo Bath Drain

K-702200-G54 Frameless Sliding Bath Door

K-702200-G73 Frameless Sliding Bath Door

K-702200-L Frameless Sliding Bath Door

K-702205-L Frameless Sliding Bath Door

K-23726 Drain treatment

K-23732 Tub & shower cleaner

K-37380 30" Rough-in Cable Bath Drain

K-37383 Rough-in cable bath drain, PVC, 30" cable with tubing

K-7265 Clearflo Bath Drain

K-37386 rough-in cable drain, PVC, 30" cable

K-7213 27" Cable Bath Drain

K-7166-AF Bath Drain

K-7161-AF 1-1/2" adjustable pop-up drain above- or through-floor

K-7214 27" Cable Bath Drain



# Codes/Standards

CSA B45.5/IAPMO Z124

## KOHLER® Plastic Baths and Receptors Lifetime Limited Warranty

See website for detailed warranty information.


### Available Colors/Finishes

Color tiles intended for reference only.


Color	Code	Description
	0	White
	96	Biscuit
	47	Almond







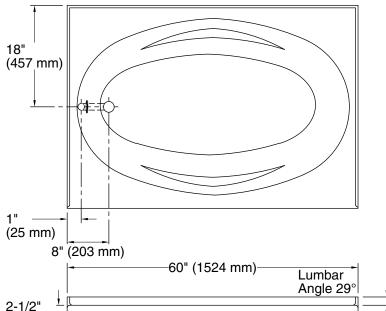

No change in measurements if connected with drain illustrated. (K-11677)



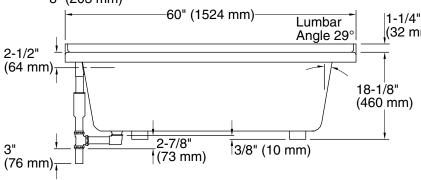

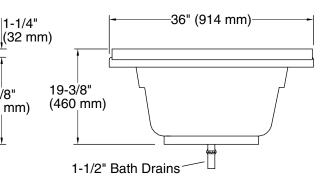

### **Technical Information**

All product dimensions are nominal.

Installation: Three-wall alcove

Drain location: Left

Basin area, bottom: 46" x 15" (1168 mm x 381 mm)
Basin area, top: 55" x 25" (1397 mm x 635 mm)

Weight: 43 lbs (19.5 kg)

Minimum floor load: 80 lbs/ft<sup>2</sup> (390.6 kg/m<sup>2</sup>)

Water depth: 14" (356 mm)
Water capacity: 57 gal (215.8 L)

Cutout: Drop-in, 58-1/2" x 34-1/2" (1486 mm x

876 mm)

Minimum flat for door: 2-3/4" (69 mm)

### **Notes**

Measure your actual product for rough-in details. Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

