Walraven VibraTek[®] MR-B 750/M8 Rubber Mount

Bell-shaped rubber isolator for equipment and machinery

86

Walraven VibraTek[®] MR-B



Features and benefits

- Ideally suited for machinery with radial vibration (as opposed to axial) and prone to sudden or pronounced starts and stops)
- Recommended for machinery with working speeds above 2500 RPM, providing a degree of vibration insulation from 75% to 80%
- Metal and rubber parts can be separated for recycling

Technical Drawing

-(+

Ø8,2 (2x)

Applications

 Industrial fans, industrial air conditioning systems, industrial compressors, generators

1. Product and packaging details

Ø8,2

120

100

Article	Description	Dimension		Pack 1	Pack 2		
			[pcs]	EAN13	[pcs]	EAN13	
2801800750	MR-B Rubber Mount	750/M8	1	8719942047531	50	8719942047548	


Ø80


M8




2. Performance data

			Max.	Min.	Max.	Min. optimal	Max. optimal
Article	Description	Dimension	Deflection	load	load	load	load
	-		[mm]	[N]	[N]	[N]	[N]
2801800750	MR-B Rubber Mount	750/M8	4.0mm	50	750	130	700



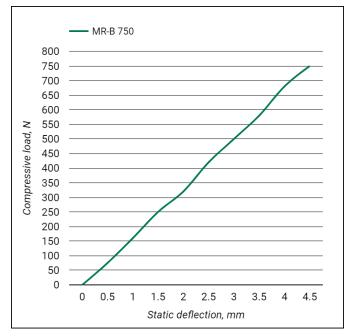

2.2 Isolation efficiency



walraven