



Fitting instruction  
 Montageanleitung  
 Monteringsvejledning  
 Monteringsvægledning  
 Montage hanleiding  
 Manuel de montage

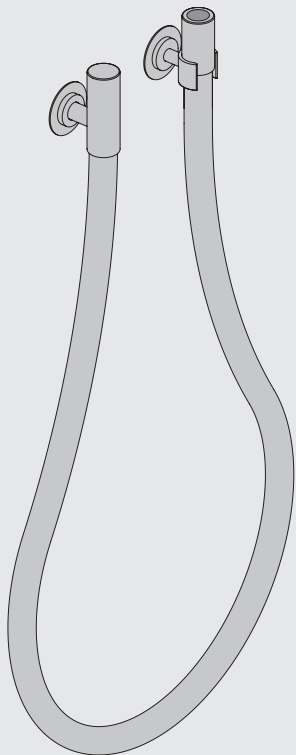

| Data | Bar<br>Psi       | 1<br>14.5   | 2<br>29.0   | 3<br>43.5  | 4<br>58.0    | 5<br>72.5    |
|------|------------------|-------------|-------------|------------|--------------|--------------|
|      | l/min<br>Gal/min | 23.1<br>6.1 | 32.7<br>8.6 | 40<br>10.6 | 46.2<br>12.2 | 51.6<br>13.6 |
|      | Max. 65°C. 150°F |             |             |            |              |              |



Min. flow: 20 l/min - 5.3 Gal/min.

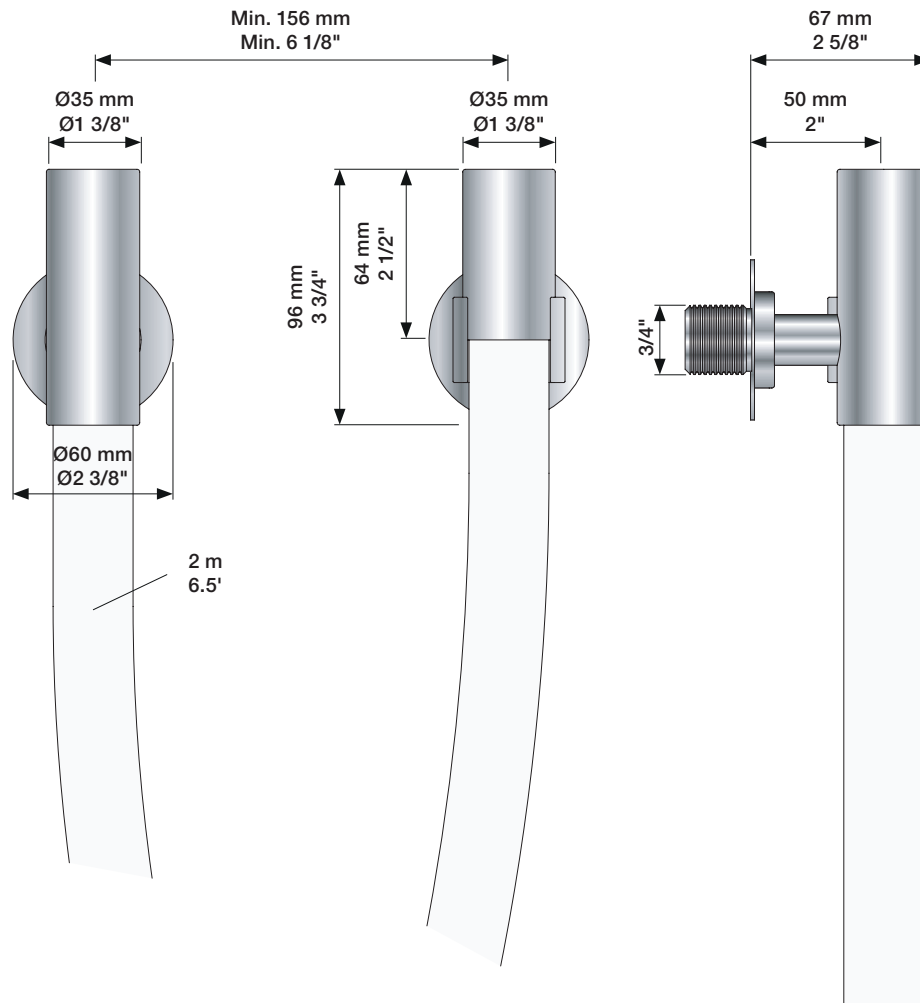

Extension Verlängerung Forlængerdele Förlängning Verlengstücken Modification


**T** Min. 3 mm  
Max. 65 mm


**Y** Min. 48 mm  
Max. 110 mm

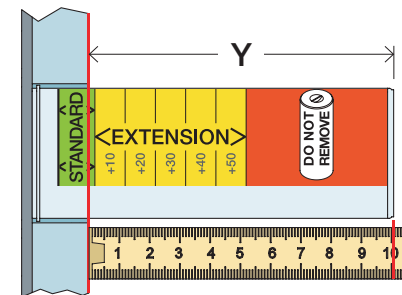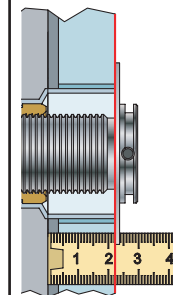


| T          | Y           | VR2019 |
|------------|-------------|--------|
| 3 - 15 mm  | 110 - 98 mm | Std.   |
| 15 - 25 mm | 98 - 88 mm  | +10    |
| 25 - 35 mm | 88 - 78 mm  | +20    |
| 35 - 45 mm | 78 - 68 mm  | +30    |
| 45 - 55 mm | 68 - 58 mm  | +40    |
| 55 - 65 mm | 58 - 48 mm  | +50    |

VR2019+

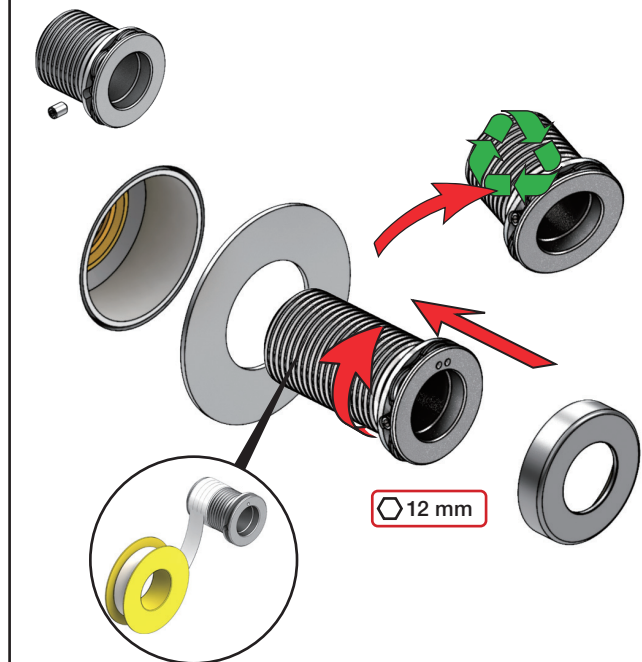

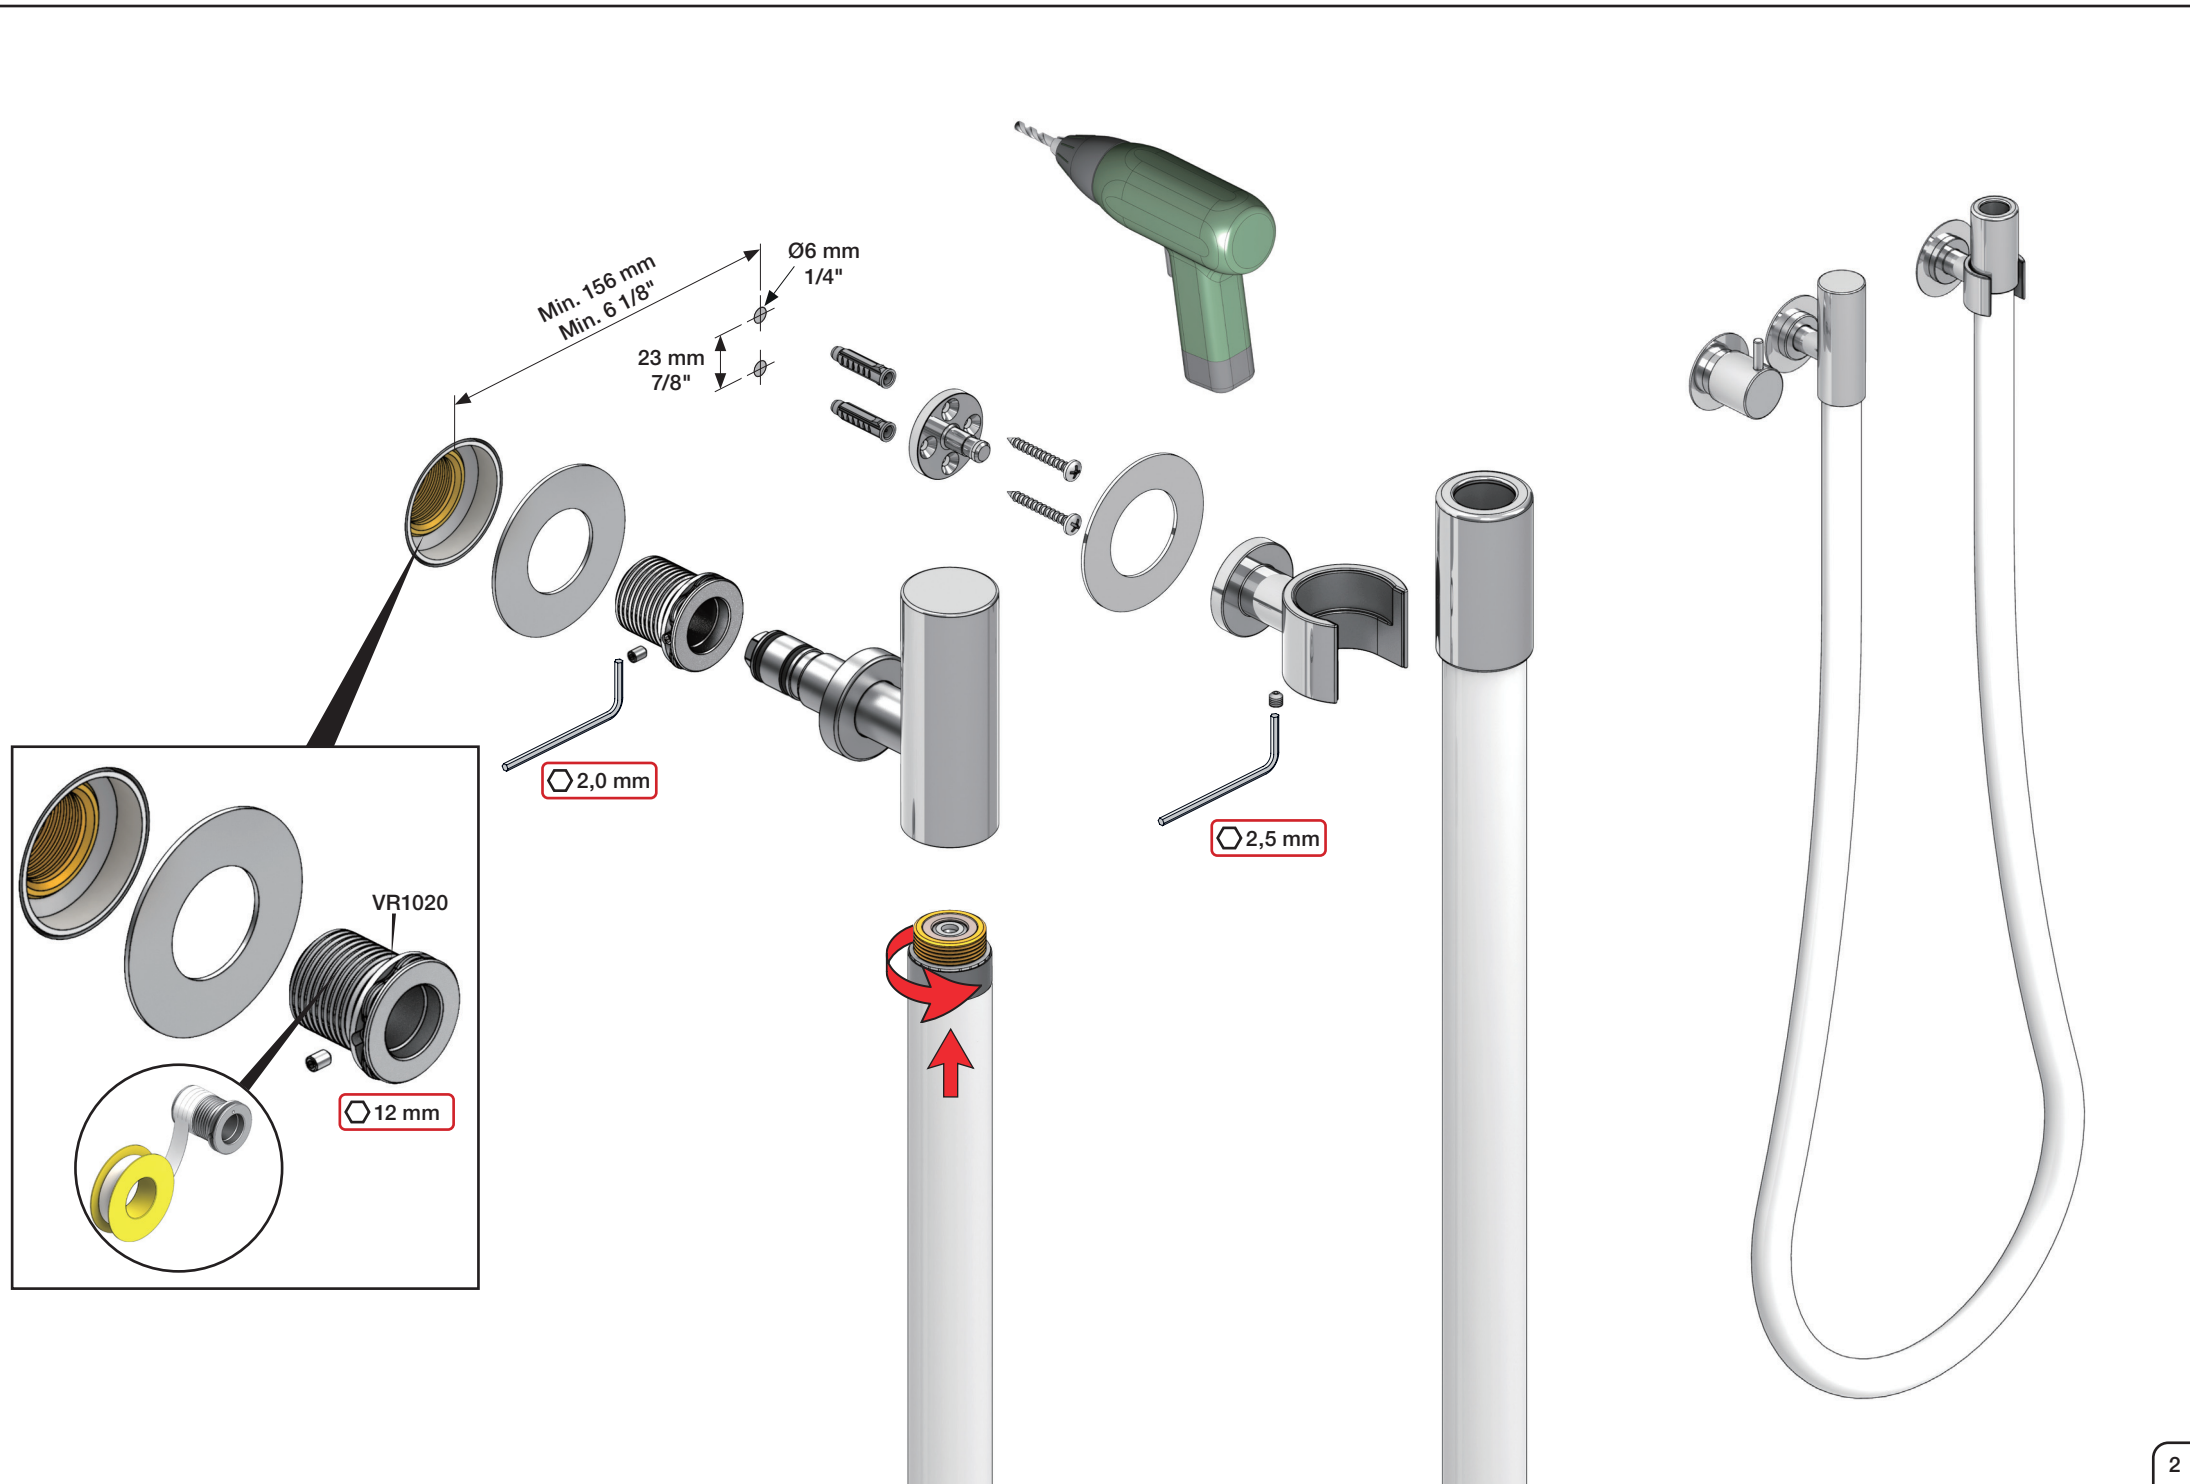

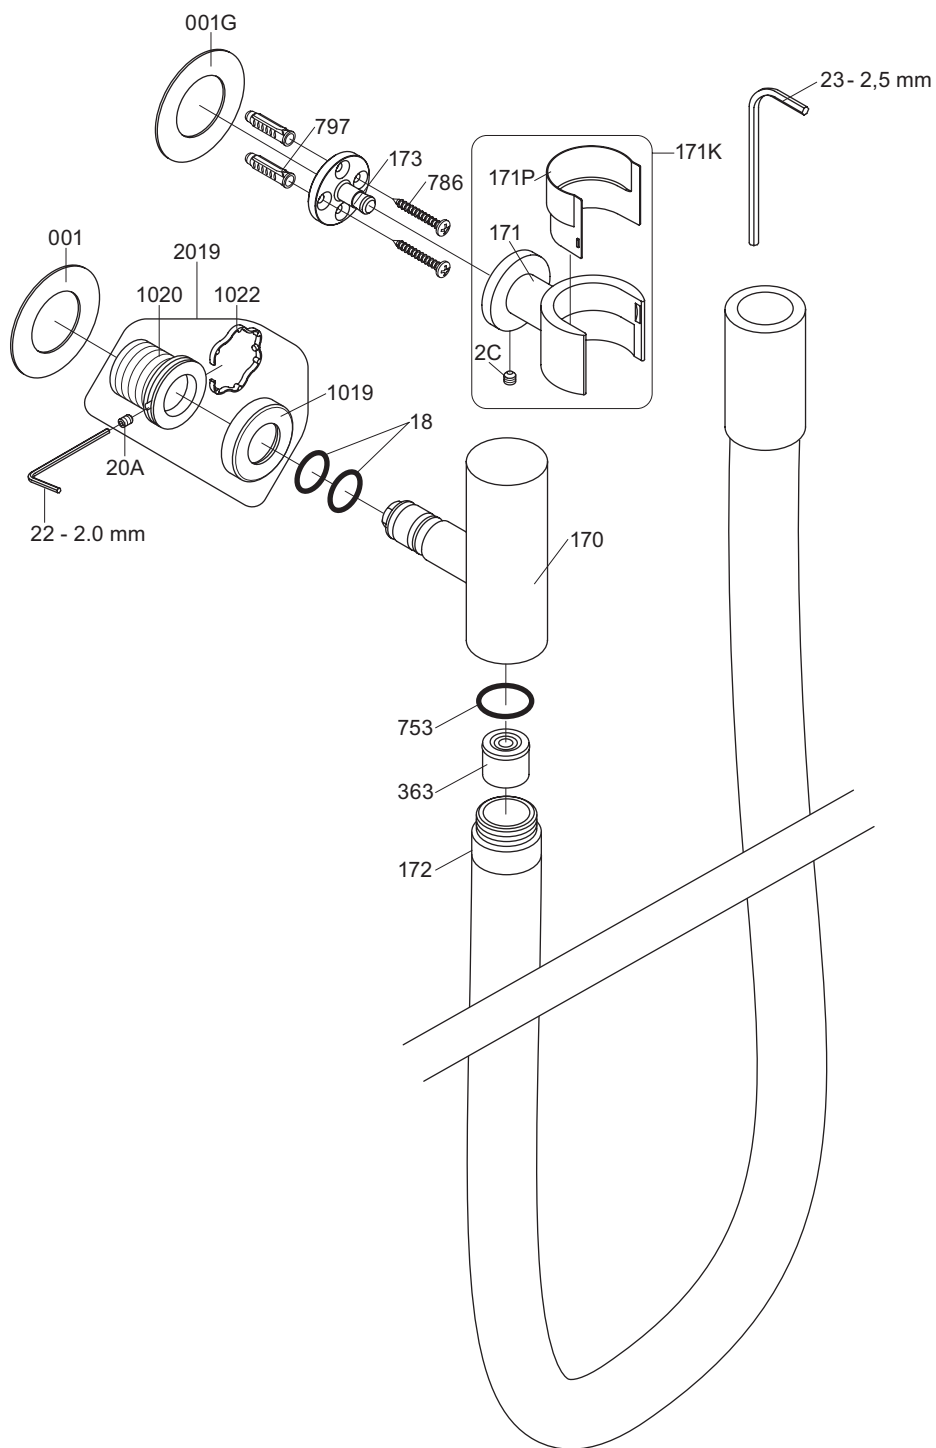

VR171K: VR20C, VR171, VR171P  
 VR1020K: VR20A, VR22, VR1020, VR1022  
 VR2019: VR20A, VR22, VR1019, VR1020, VR1022



**vola**  
 Lunavej 2  
 DK-8700 Horsens  
 Tlf : + 45 7023 5500  
 sales@vola.com  
 www.vola.com

## VOLA 070W

Date  
Apr. 21

Rev.  
1

Sheet  
**SB 16.3**