

HELSINKI - Frontal Shower of a door and a fixe

CHARACTERISTICS

- Tempered transparent glass Standard EN- 12150 6 mm door and fixed.
- 20 mm expansion per profile.
- Reversible.
- Height: 1950 mm.
- No lower profile.

CERTIFICATES

CE - Product manufactured in accordance with the guidelines of European Community regulations.



EN14428 - Screen shower. Functional requirements and test methods.



Finish

Ultra-Protect

OPTIONAL ANTI-SCALING TREATMENT



DO NOT USE
ABRASIVE
PRODUCTS



Transparent

MEASURES AVAILABLE FOR FIXED SIDE

Dimensions and packaging weight according to measurement in mm.

Dimensions (A)	Width mm.	Depth mm.	Hight mm.	Gross weight Kg.	Net weight Kg.	Nº of packaging
675 - 695	725	60	1995	30	28,50	1
775 - 795	825	60	1995	33,6	31,92	1
875 - 895	925	60	1995	37,2	35,34	1


Hight (H): 1950 mm.

MEASURES AVAILABLE FOR SPECIAL FIXED SIDE

Dimensions and packaging weight according to measurement in mm.

Dimensions (A)	Width mm.	Depth mm.	Hight mm.	Gross weight Kg.	Net weight Kg.	Nº of packaging
<600	700	105	2080	22,4	19,2	1
600 - 800	900	105	2080	28,4	25	1
800 - 1000	1100	105	2080	34,7	30,9	1
1000 - 1200	1300	105	2080	40,54	36,7	1

Hight (H): 1950 mm.

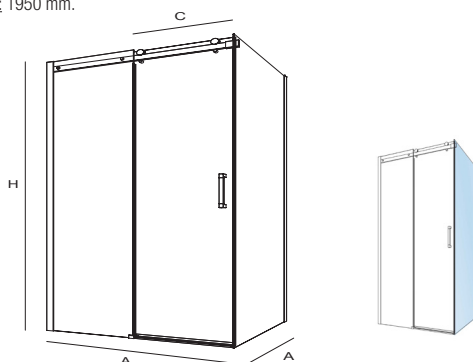

Additional availability of supplementary adjustment profiles

Shapes	Hight 2000 mm
	PROFILE 20x20 DIAMOND
	PROFILE 40x20 DIAMOND
	PROFILE 40x40 DIAMOND
	PROFILE 40x60 DIAMOND
	PROFILE 40x80 DIAMOND