



66" alcove bath w/ integral apron K-848

#### **Features**

- Clean lines and an integral apron create a comfortable bathing experience.
- 16.5-inch step-over threshold for easy entry and exit.
- Standard size simplifies installation in remodels.
- Safeguard® slip-resistant surface on bath floor.
- Wide ledges for extra storage space.

#### Material

KOHLER® enameled cast iron.

### Installation

- Right drain.
- Alcove.

## **Recommended Products/Accessories**

K-37386 rough-in cable drain, PVC, 30" cable K-23726 Drain treatment K-23725 Cast iron cleaner



ADA

### Codes/Standards

ASME A112.19.1/CSA B45.2 ASTM F462 ADA ICC/ANSI A117.1

# KOHLER® Enameled Cast Iron Bath and Shower Base Lifetime Limited Warranty

See website for detailed warranty information.

#### **Available Colors/Finishes**

Color tiles intended for reference only.

| Color | Code | Description |
|-------|------|-------------|
|       | 0    | White       |
|       | 96   | Biscuit     |
|       | 47   | Almond      |
|       | NY   | Dune        |
|       | G9   | Sandbar     |






# **Bellwether®**

# 66" alcove bath w/ integral apron K-848

No change in measurement if connected with drain illustrated. (K-7259)

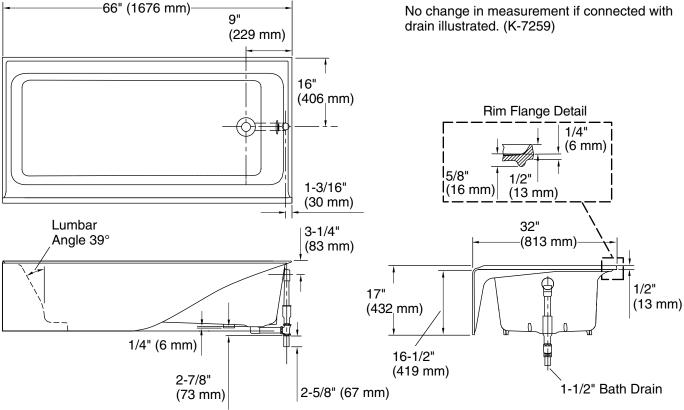

## **Technical Information**

All product dimensions are nominal.

Installation: Three-wall alcove

Drain location: Right

50-3/4" x 20-5/16" (1289 mm x 516 mm) Basin area, bottom: 58-7/16" x 22-5/8" (1484 mm x 575 mm) Basin area, top:

Weight: 400 lbs (181.4 kg) Minimum floor load: 57 lbs/ft<sup>2</sup> (278.3 kg/m<sup>2</sup>) Water depth: 11-11/16" (297 mm) Water capacity: 49 gal (185.5 L) Minimum flat for door: 2-1/2" (64 mm)

#### **Notes**

Measure your actual product for rough-in details. Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

ADA compliant when installed to the specific requirements of these regulations.

