

# Walraven VibraTek® PR-T Rubber Tile Pad


(L2 05 72)

a versatile rubber tile pad for general vibroacoustic isolation applications



## Свойства и преимущества

- ideal for use as an elastic isolating support for equipment and metal structures
- individual 50x50mm pieces can be easily cut to form required support shape
- transforms to elastic base support when used with a hexagon head screw
- reusable in the event of machine relocation
- simple to cut and install
- supplied as a mat of 64 blocks (8x8) joined by a membrane

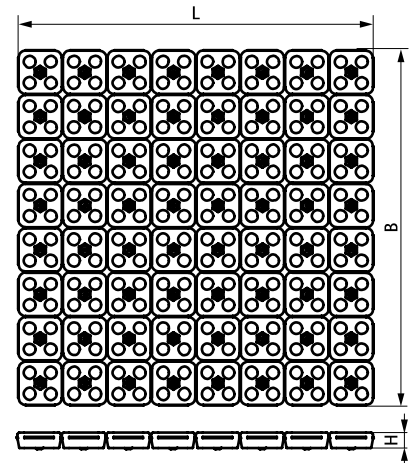

Арт. №	L	B	H	Min. Load	Max. Load	Min. Optimal Load	Max. Optimal Load	Max. Deflection	Уп.мин	Уп.макс
		(мм)	(мм)	(Н)	(Н)	(Н)	(Н)	(мм)		
2801200400	411,2 mm	411,2	18	2 500	74 000	9 000	52 000	4,5	1	5
*	50 mm	50	18	39	1 156	140	812	4,5	-	-

\* Performance indication per single 50x50mm rubber tile.  
See Product Data Sheet for further technical information.