


Fitting instruction
Montageanleitung
Monteringsvejledning

Monteringsvægledning
Montagehandleiding
Manuel de montage
Instrucciones de montaje

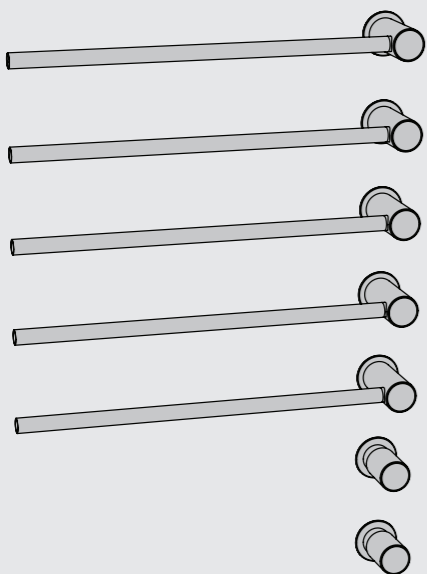

IPX4

vola

www.vola.com

T39ELUP_120V_V1_40998609
07-04-2021

© VOLA A/S



5 705230 243788

120VAC/60Hz ONLY



220VAC/60Hz

Only to be installed by authorized electrician.

TEST! ON-OFF

Darf nur von autorisierten Elektrofachkraft ausgeführt werden.





Må kun installeres af en autoriseret elinstallatør.

Installeras endast av en kvalificerad elektriker.

Installatie verplicht uit te voeren door een erkend elektricien.

Doit être installé par un électricien agréé.


Solo para ser instalado por electricista autorizado.

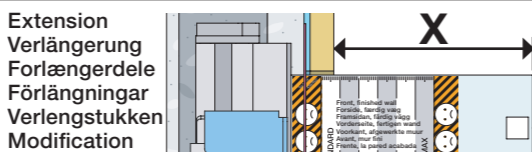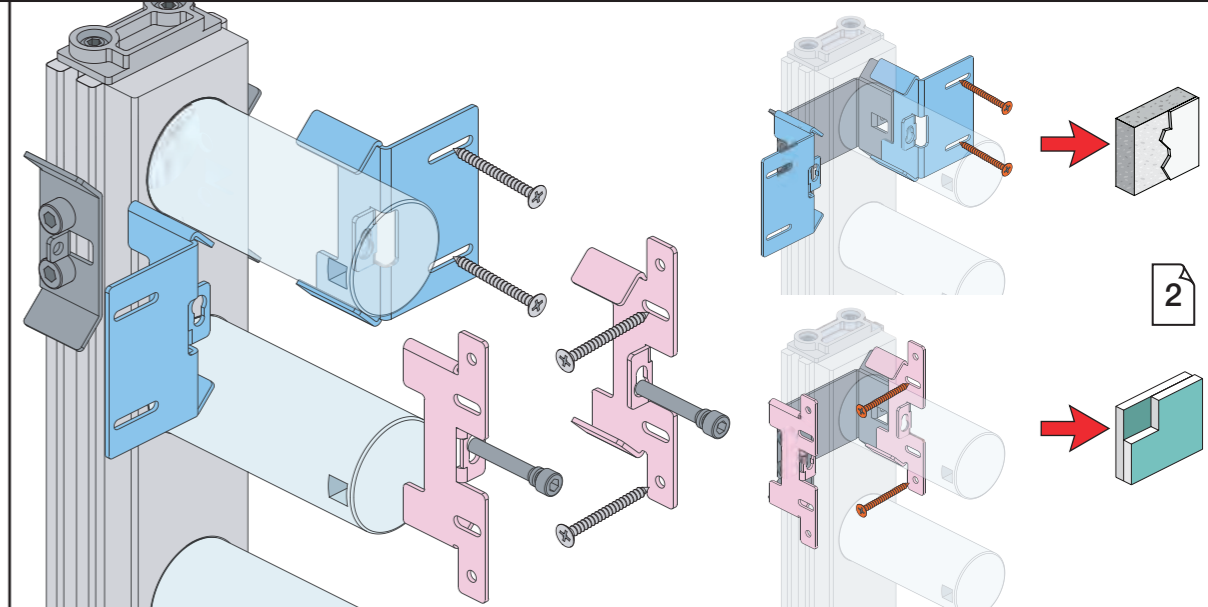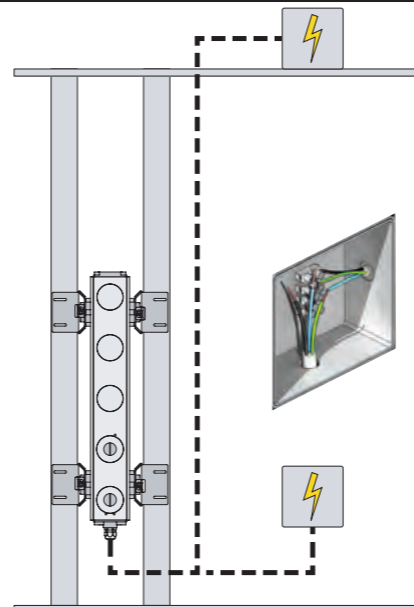

X	VR951:	VR959:
97 - 81 mm	NO!!	NO!!
82 - 72 mm	Standard	Standard
72 - 62 mm	VR951+10	VR959+10
62 - 52 mm	VR951+20	VR959+20
52 - 42 mm	VR951+30	VR959+30
42 - 32 mm	VR951+40	VR959+40
32 - 22 mm	VR951+50	VR959+50

Lightweight wall
Leichtwand
Let væg

Lätta konstruktion
Holle wandconstructie
Construction légère
Pared liviana


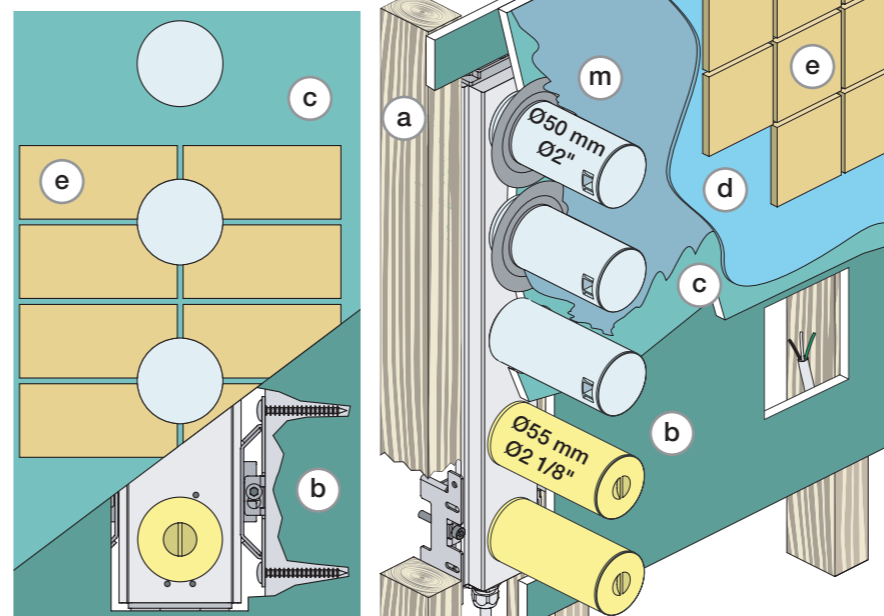


Tiles
Fliesen
Fliser

Kakelplattor
Tegels
Carreaux
Baldosas


Paint/Tapestry
Lack/Tapete
Maling/Tapet

Målarfärg/Tapet
Kleurstof/Behang
Peinture/Tapisserie
Pintar/Tapiz

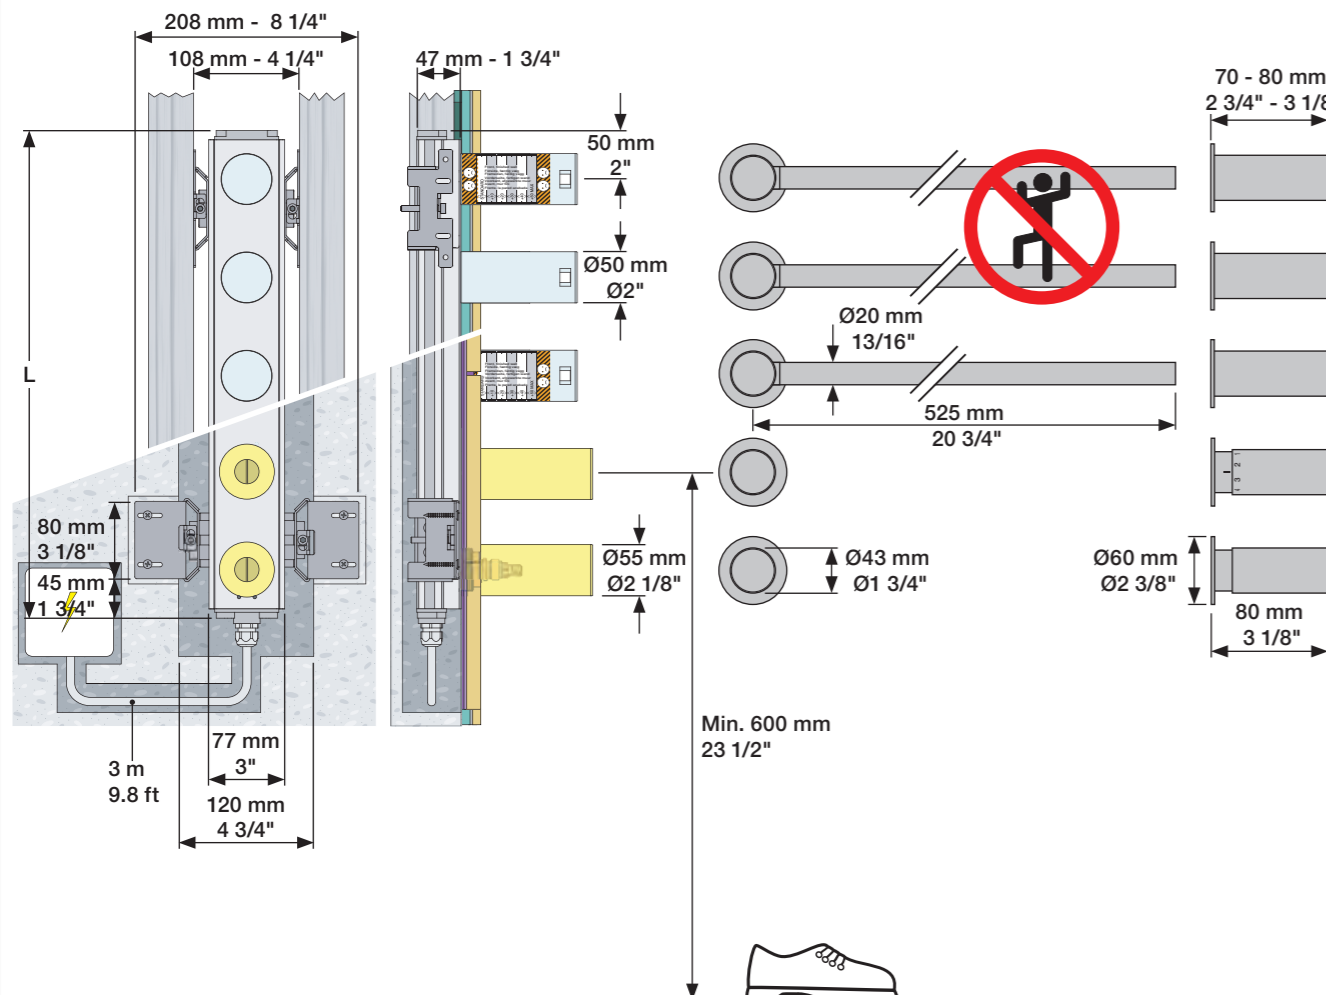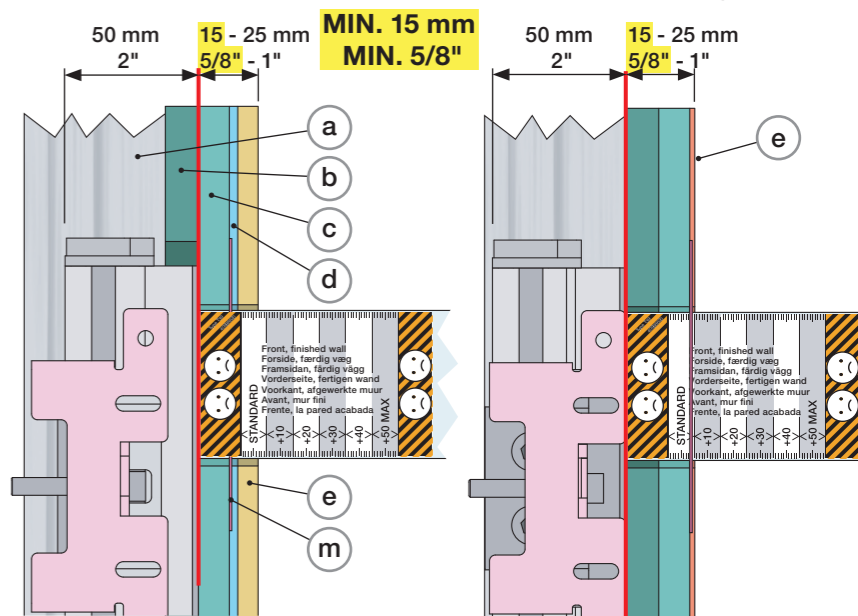

Masonry
Mauerwerk
Murværk

Murverk
Massive wand
Mur Plein
Albañilería

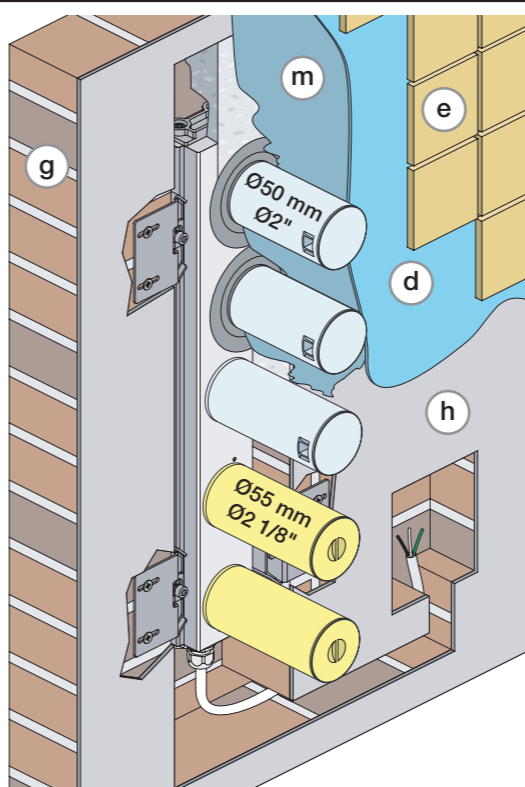

Tiles
Fliesen
Fliser


Kakelplattor
Tegels
Carreaux
Baldosas

Paint/Tapestry
Lack/Tapete
Maling/Tapet








Målarfärg/Tapet
Kleurstof/Behang
Peinture/Tapisserie
Pintar/Tapiz

Cement plaster
Zementputz
Cementpuds



Cementpuds
Cementplester
Ciment à base de plâtre
Yeso de cemento

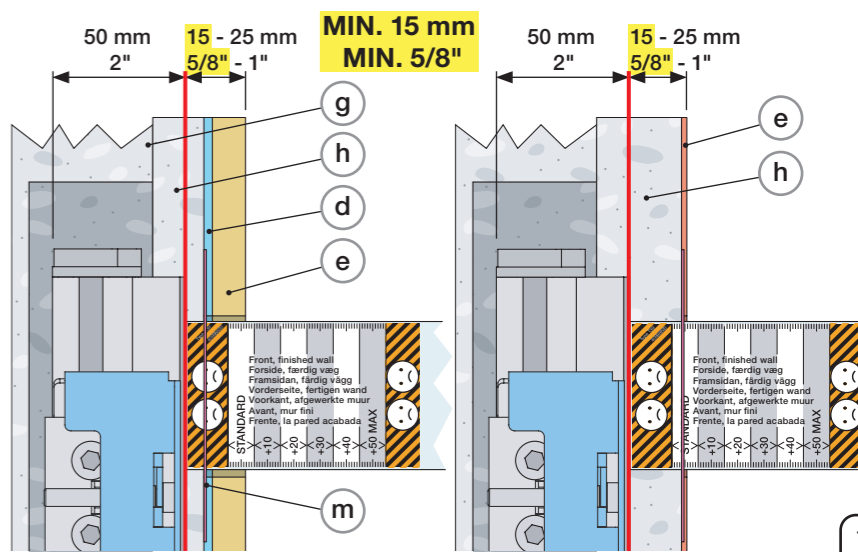


Lightweight wall
 Leichtwand
 Let væg
 Lätta konstruktion

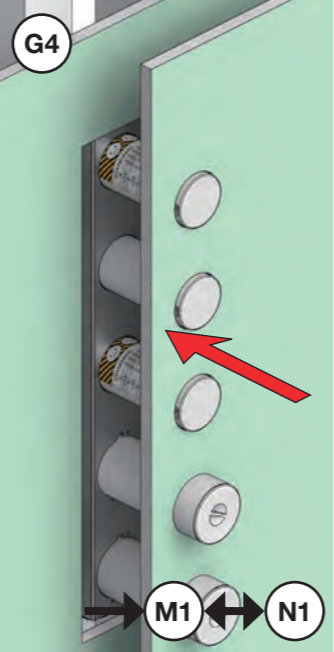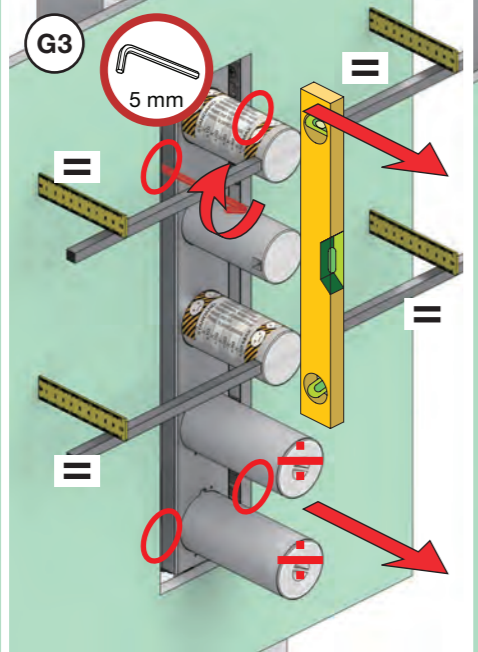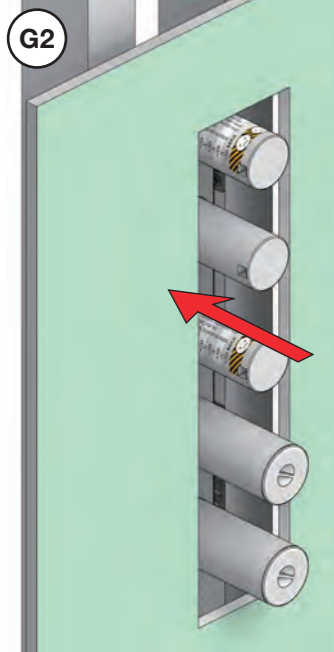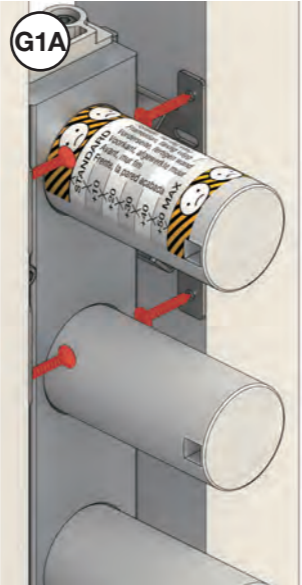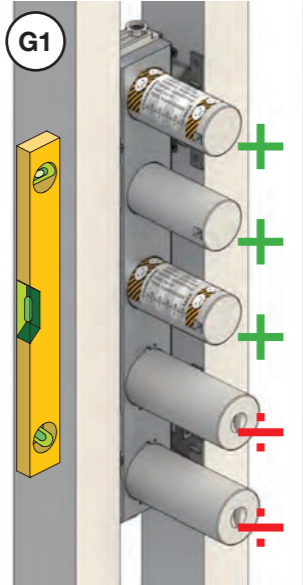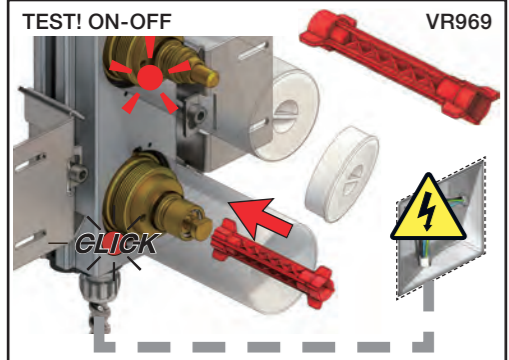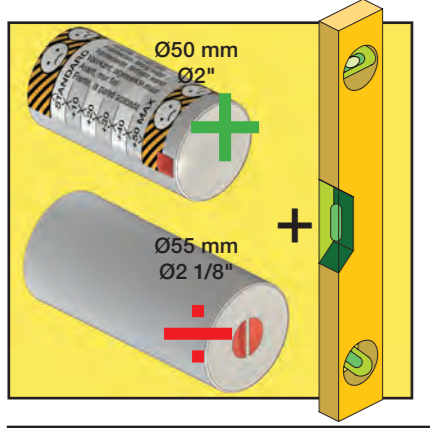






M1 Waterproof membrane
 Wasserdichte Membran
 Vandtæt membran
 Vattentät membran
 Waterdicht membran
 Membrane imperable

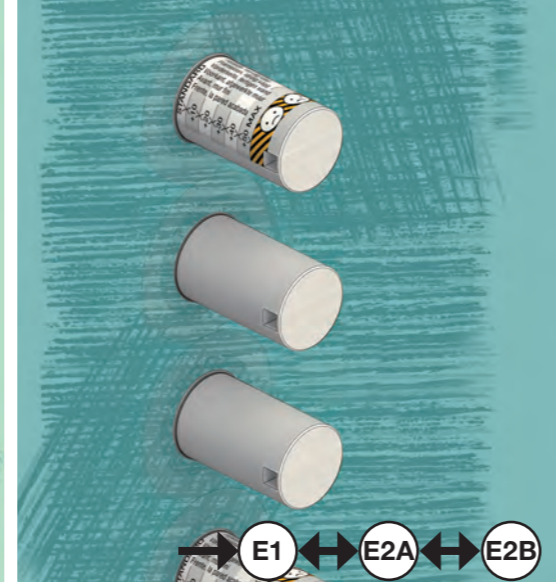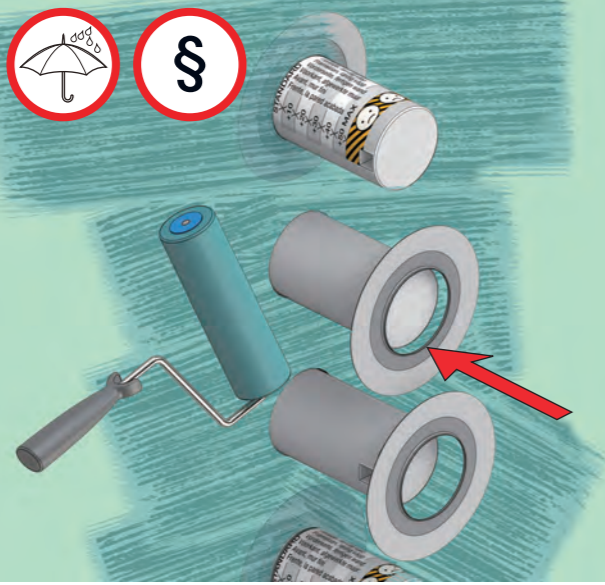

N1 Without membrane
 Ohne Membran
 Uden membran
 Uten membran
 Zonder membran
 Sans Membrane imperable

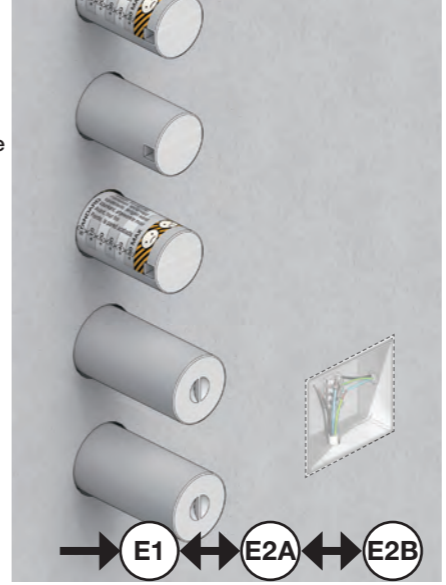


Masonry
 Mauerwerk
 Murværk
 Murverk

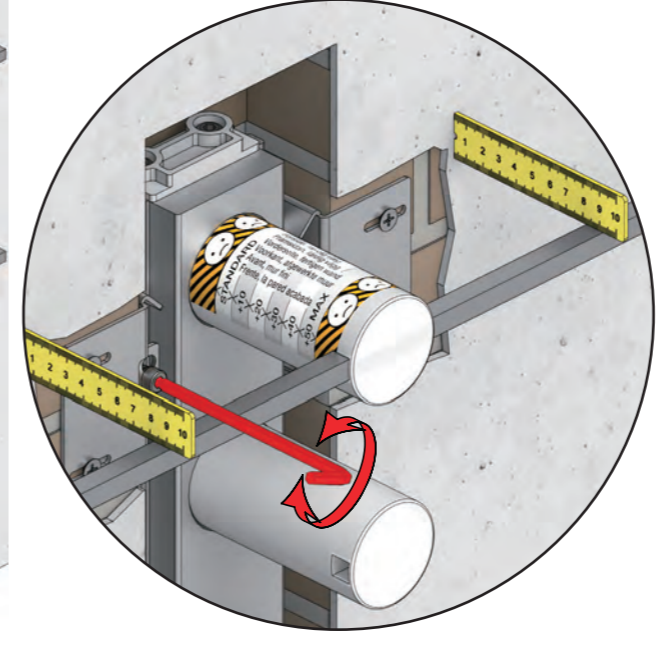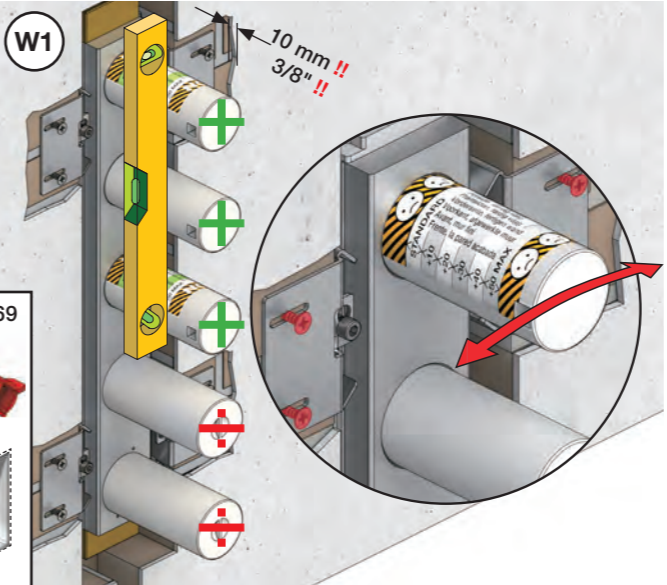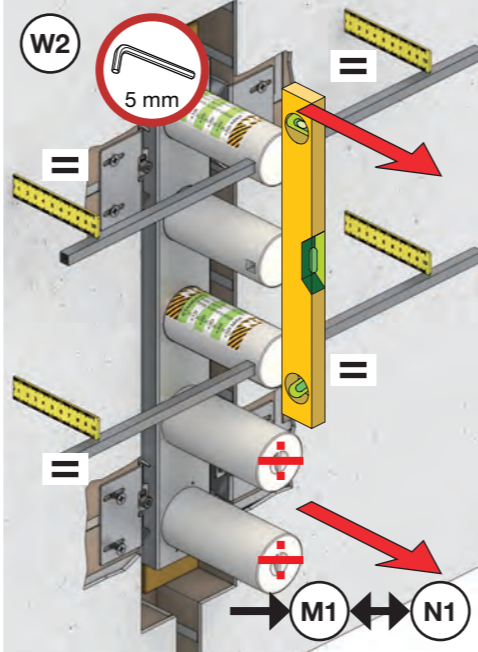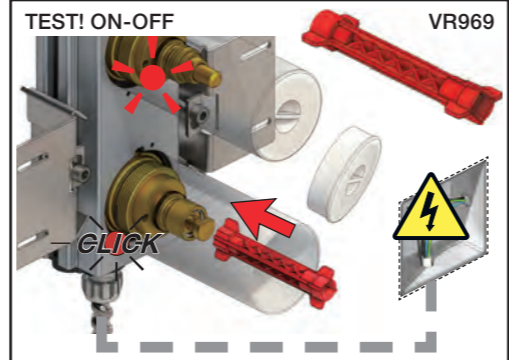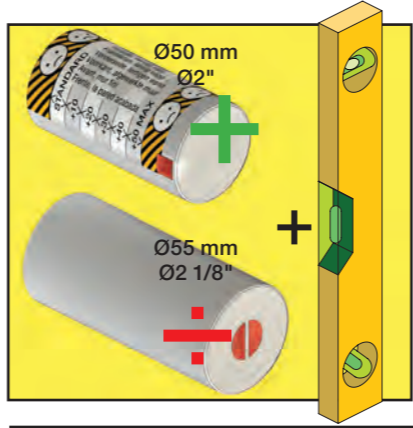


Wall coverings
 Wandverkleidung
 Vægbeklædning



E1 Tiles
 Fliesen
 Fliser
 Kakelplattor

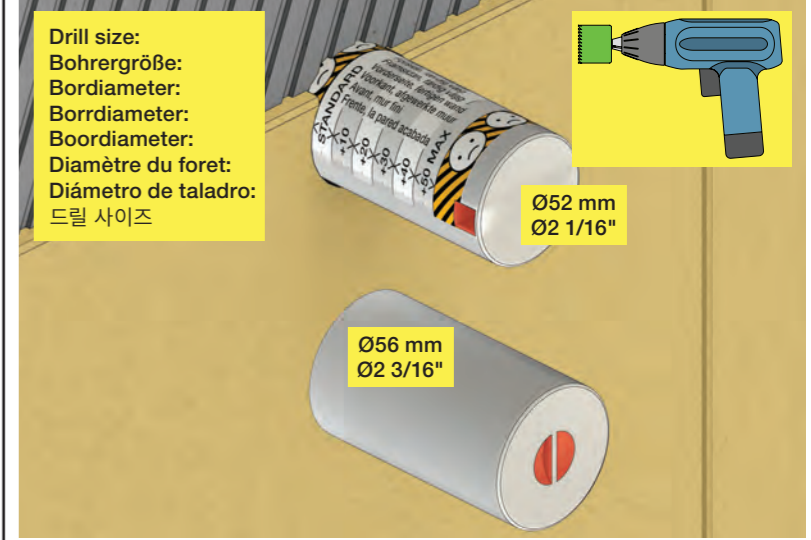

E2A Tapestry
 Tapete
 Tapet

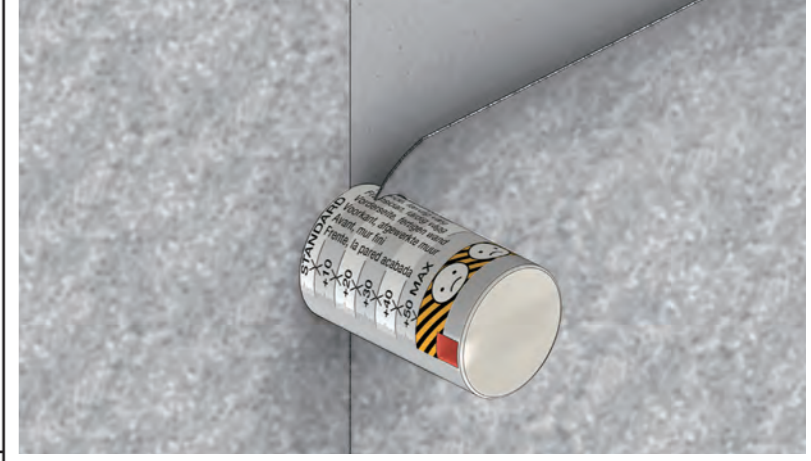


E2B Paint
 Lack
 Maling

Målarfärg
 Kleurstof
 Peinture
 Pintar


Cement plaster
 Zementputz
 Cementpuds

Cementpuds
 Cementplester
 Ciment à base de plâtre
 Yeso de cemento

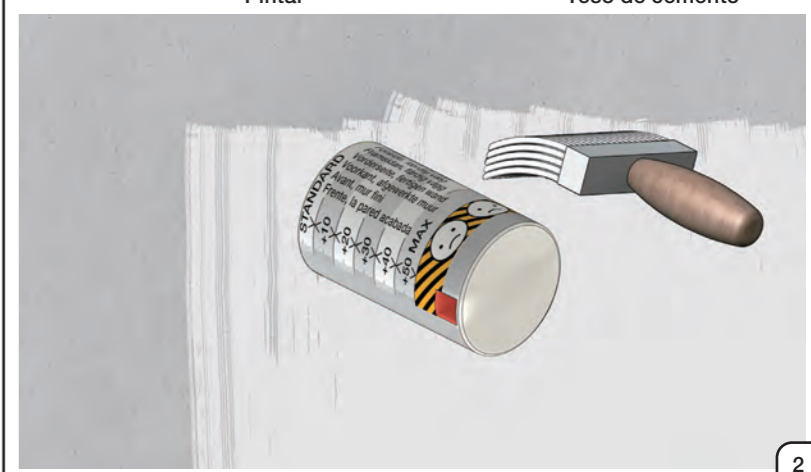

VOLA T39EL-120V

Fitting of trim
 Montage von Aufputzteilen
 Montering af udvendige dele
 Montering av utvändiga delar
 Montage van de afbouwdelen
 Montage des parties visibles

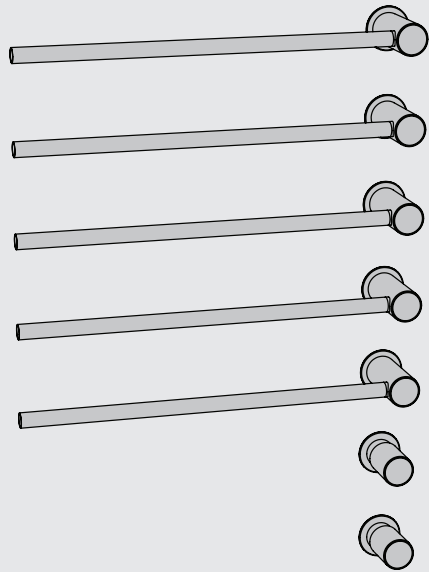


www.vola.com
 T39ELAP_120V_V1_40998611
 06-05-2021

© VOLA A/S



Only to be serviced by authorized electrician.
 Darf nur von autorisierter Elektrofachkraft ausgeführt werden.
 Må kun serviceres af en autoriseret elinstallatør.

Serviceras endast av en kvalificerad elektriker.
 Onderhoud verplicht uit te voeren door een erkend elektricien.
 Doit être entretenu par un électricien agréé.



2




Do not cut the membrane
Die Membran nicht schneiden
Skær ikke membranen
Skär inte membranet


Snij het membraan niet door
Ne coupez pas la membrane
No cortar la membrana




3

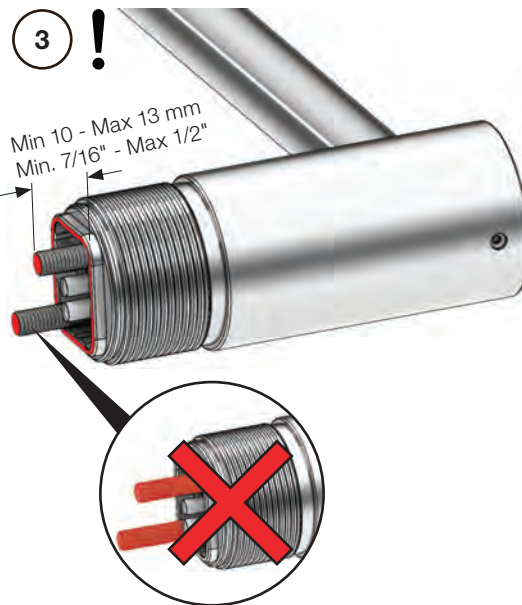

4






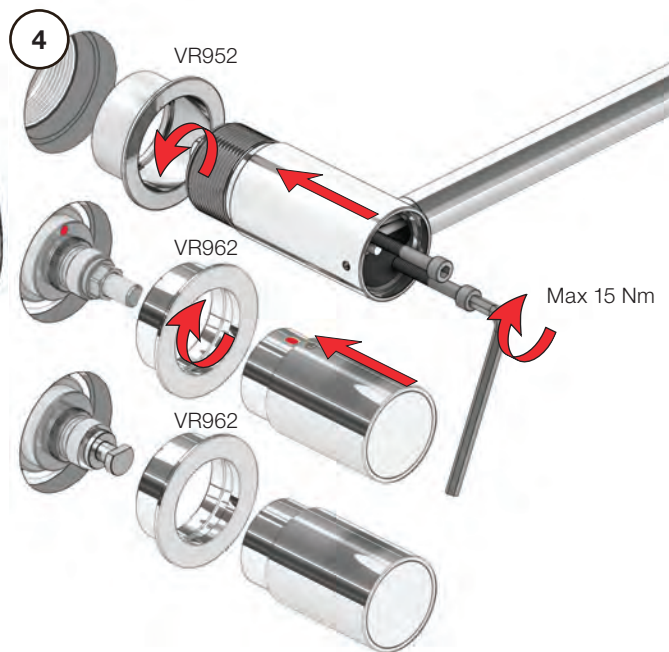


5

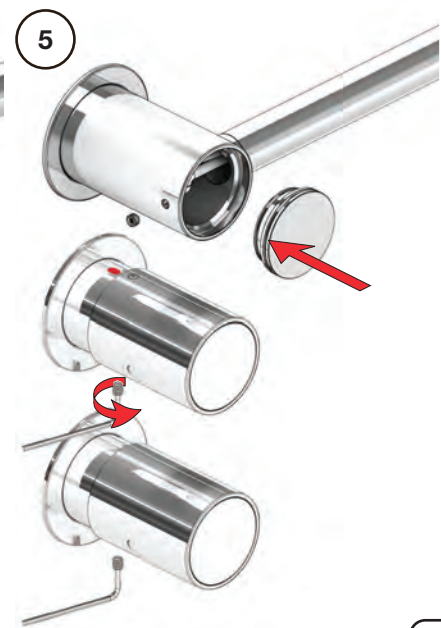

Extension Verlängerung	Førlængerdele Förlängningar	Verlængstukken Modification
X	VR951:	VR959:
97 - 81 mm	NO!!	NO!!
82 - 72 mm	Standard	Standard
72 - 62 mm	VR951+10	VR959+10
62 - 52 mm	VR951+20	VR959+20
52 - 42 mm	VR951+30	VR959+30
42 - 32 mm	VR951+40	VR959+40
32 - 22 mm	VR951+50	VR959+50

Y	VR951:	VR959:
0 - 25 mm	NO!!	NO!!
25 - 35 mm	Standard	Standard
35 - 45 mm	VR951+10	VR959+10
45 - 55 mm	VR951+20	VR959+20
55 - 65 mm	VR951+30	VR959+30
65 - 75 mm	VR951+40	VR959+40
75 - 85 mm	VR951+50	VR959+50

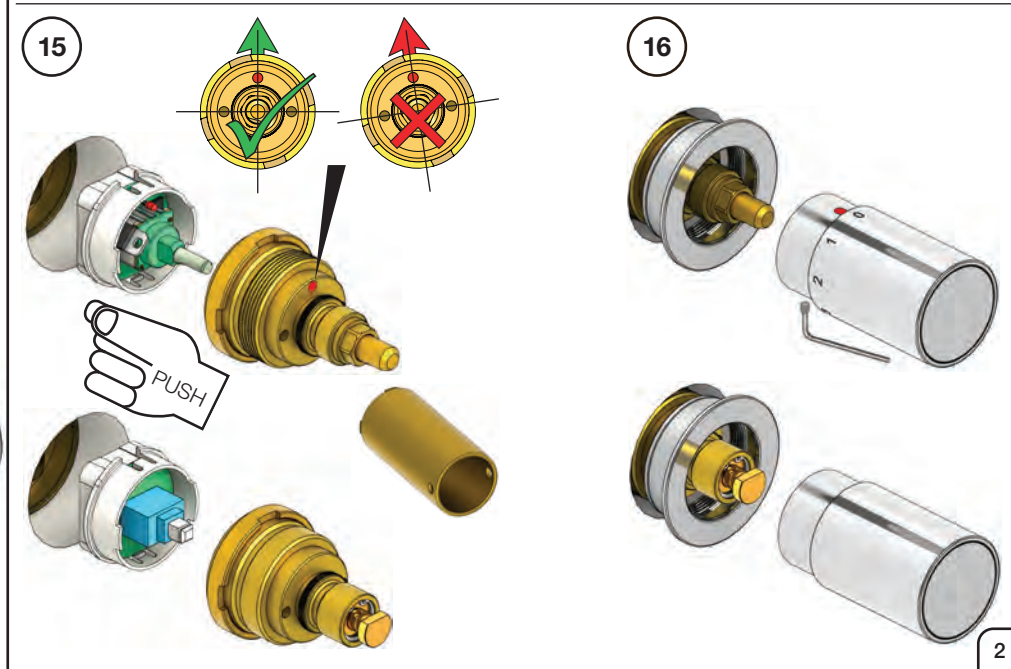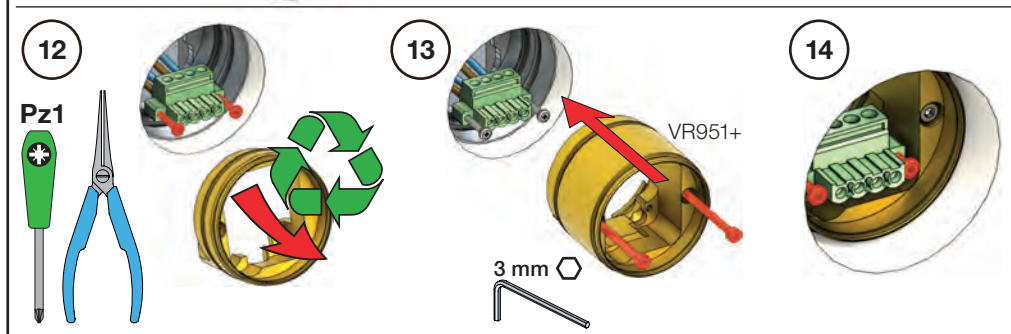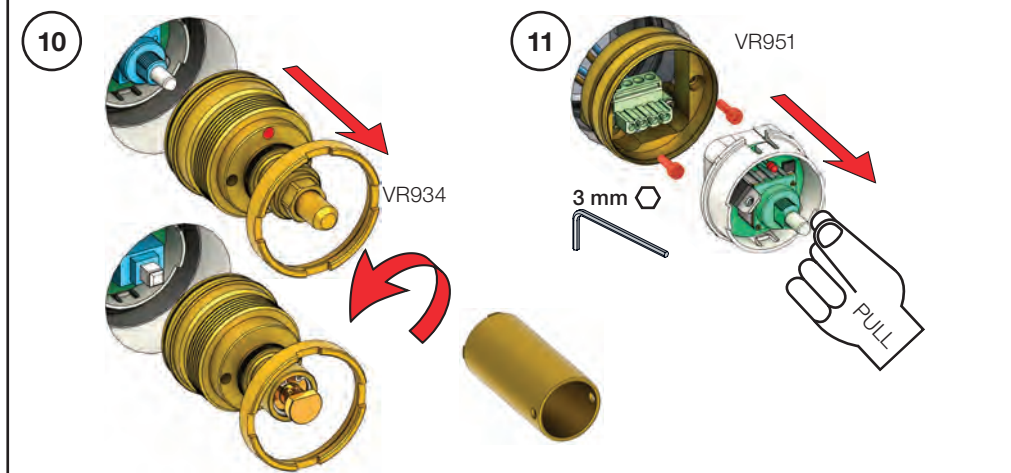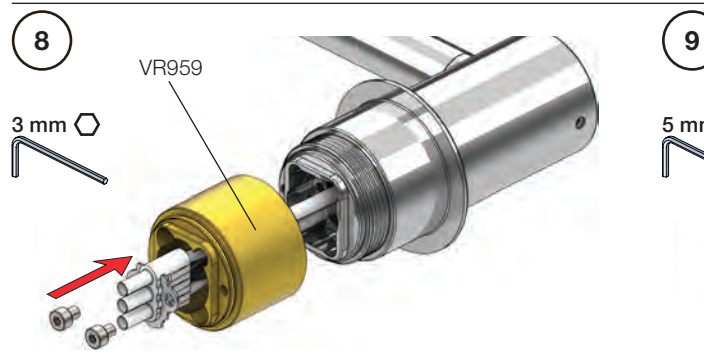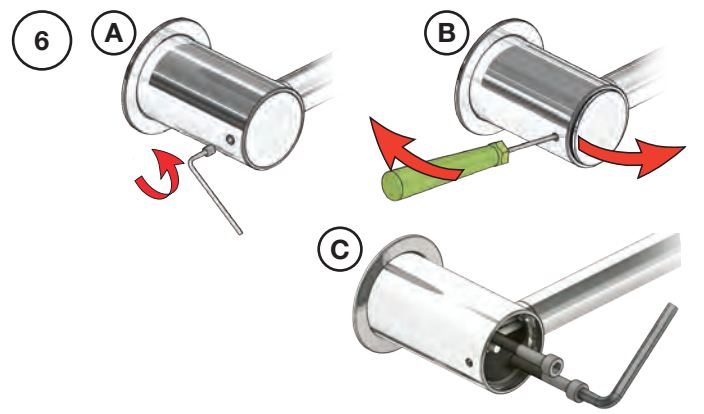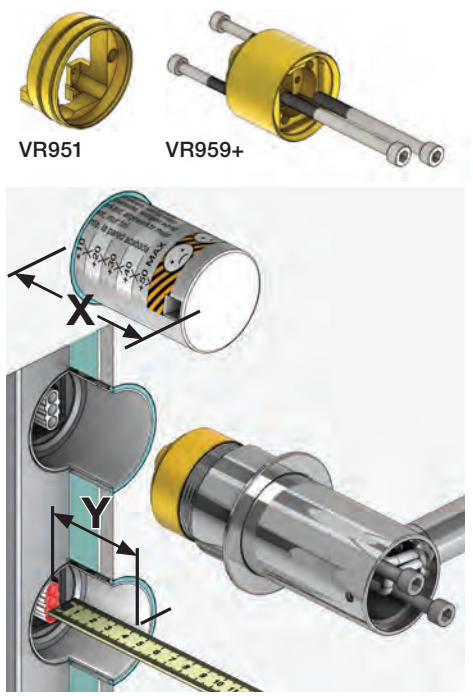



Operation
Fonctionnement

120VAC





120VAC



 °F/°C


 ON - OFF




°F/°C




ON - OFF



0	OFF	
1	20°C	68°F
2	30°C	86°F
3	40°C	104°F
4	50°C	122°F
	50°C	122°F

4 + 120 min - OFF *



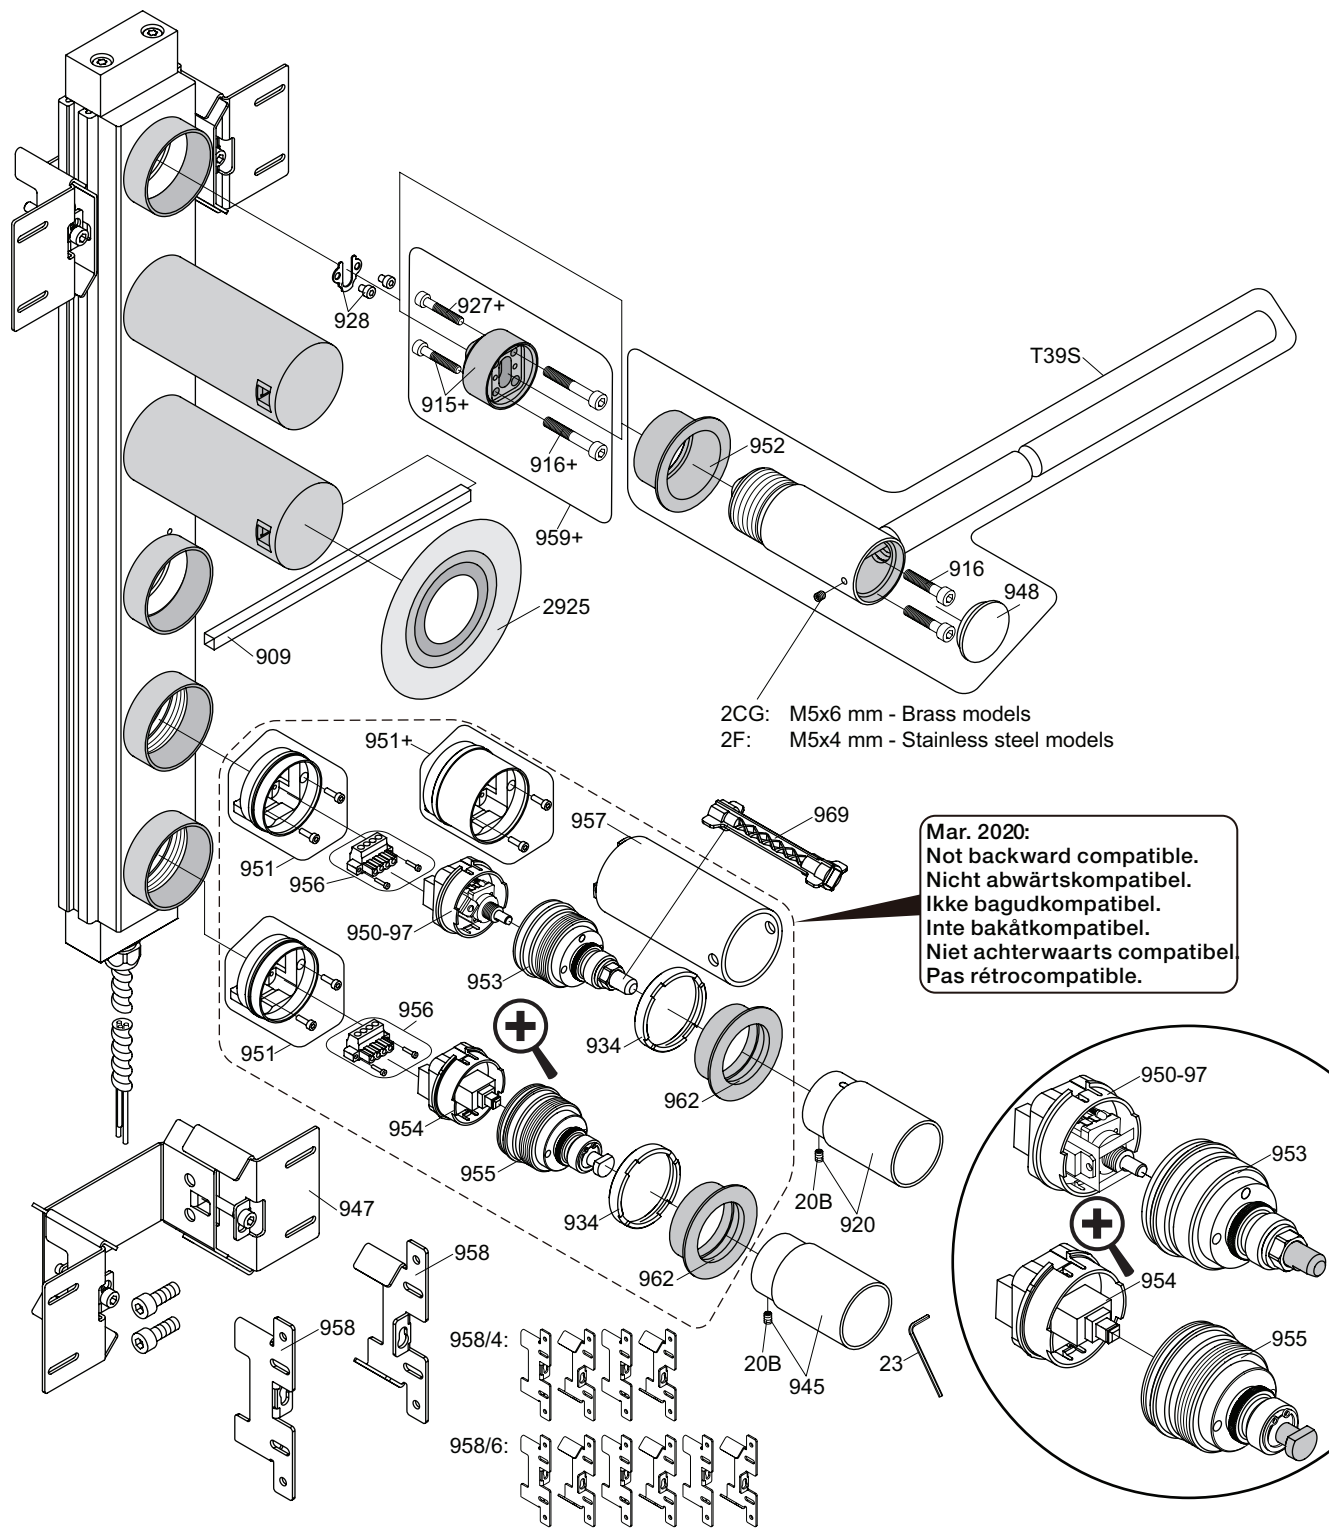

2CG: M5x6 mm - Brass models
 2F: M5x4 mm - Stainless steel models

Mar. 2020:
 Not backward compatible.
 Nicht abwärtskompatibel.
 Ikke bagudkompatibel.
 Inte bakåtkompatibel.
 Niet achterwaarts compatibel.
 Pas rétrocompatible.

- VR959+ 2xVR916+, VR915+
- VR950-97 VR950-97, VR957 (120 min. OFF) (standard)
- VR951+ VR951+, VR956, VR957
- VR953 VR953, VR957
- VR954 VR954, VR957
- VRT39S VR2CG/2F, 2xVR916, VR948, VR952
- VRT39ST VR23, VR920, VR945, 2xVR962, VRT39S



vola
 Lunavej 2
 DK-8700 Horsens
 Tlf : + 45 7023 5500
 sales@vola.com
 www.vola.com

VOLA T39EL - 120V

Dato
 Mar. 20

Rev.
 2

Blad
 SB42.41