

Reference

4107.

Application

Outdoor

Installation type

Surface

Description

Outdoor bollard light designed by Xuclà & Alemany. It gives a pleasant, subtle light through the methacrylate diffuser, and can withstand tough outdoor conditions. Available in khaki and oxide lacquer.

Diffuser


Acrylic diffuser

Finish



4107-07. Khaki lacquer
4107-54. Oxide lacquer

Sketch




Electrical characteristics

2 x 2G11 230V 24W



Total 48 W



Physical characteristics

1 Box / 0.41 x 0.41 x 0.41 m. / Vol. 0.0660 m³ /
Gross weight 16.6 kg. / Net weight 16.0 kg.

Installation and assembly

Follow instructions of the installation guide

Light distribution


Ground lighting

Reduced-height outdoor lamp to shade light on the ground.

Photometric data

Efficiency : 16.18%
Coordinate system : C-G
Total flux : 3600.00 lm
Maximum value : 132.09 cd/klm
Light position : C=90.00 G=20.00
Double symmetrical : 4

Isolux : Isolux (suelo)
Light position :
X=0.00m Y=0.00m Z=2.50m
Light rotation :

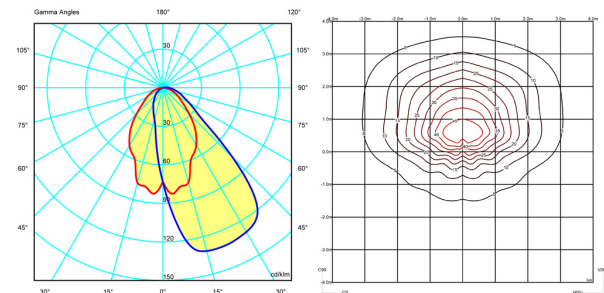

Certificates

