KOHLER_®

Features

- Single-speed whirlpool offers performance and value, with 6 fully adjustable jets.
- Hydromassage flow and direction can be controlled at each jet.
- Built-in heater.
- Corner layout minimizes footprint without compromising bathing area.
- Spacious design accommodates up to two bathers.
- Molded lumbar support and armrests offer extra comfort while bathing.
- Multiple pump location options give you more choices for installation and access. (See specification sheet for pump locations.)
- Center drain.

Material

Acrylic.

Hydrotherapy

Whirlpool.

Installation

• Corner.

Recommended Products/Accessories

K-11677 Bath Drain K-1491 Bath/Whirlpool Pillow K-1601 Bath/Whirlpool Footstop K-7259 Brass toe tap bath drain K-37382 45" Rough-in Cable Bath Drain K-23726 Drain treatment K-23732 Tub & shower cleaner



Codes/Standards

ASME A112.19.7/CSA B45.10 CSA B45.5/IAPMO Z124 ASTM E162 ASTM E662 UL 1795

KOHLER[®] Plastic Baths and Receptors Lifetime Limited Warranty KOHLER[®] Hydrotherapy Components Five-Year Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color Code Description


0	White
96	Biscuit
47	Almond



Tercet® 5' Whirlpool Bath **K-1160-HD**



5' Whirlpool Bath K-1160-HD

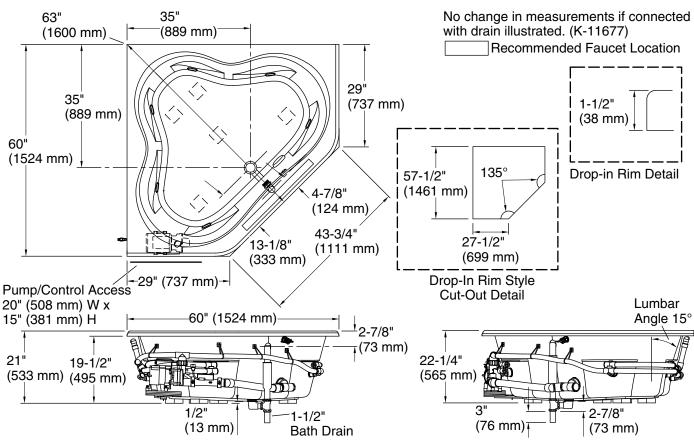

Required Electrical Service

Two dedicated circuits required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

 Pump:
 120 V, 15 A, 60 Hz

 Heater:
 120 V, 15 A, 60 Hz

Technical Information

All product dimensions are nominal.

Installation:	Corner
Drain location:	Center
Basin area, bottom:	52" x 38-3/4" (1321 mm x 984 mm)
Basin area, top:	61" x 46-1/4" (1549 mm x 1175 mm)
Weight:	131 lbs (59.4 kg)
Minimum floor load:	39 lbs/ft² (190.4 kg/m²)
Water depth:	15" (381 mm)
Water capacity:	96 gal (363.4 L)
Electrical component	Pump: 120 V, 7.5 A, 60 Hz
rating:	Heater: 120 V, 12.5 A, 60 Hz, 1500 W
Pump speed:	Single

Notes

Measure your actual product for rough-in details. Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

If installing a rim-mount faucet, make sure there is no interference above or below the deck before drilling any holes.

